

Complete Programs Included

MICRO ^{DEC 83} TM


Advancing Computer Knowledge

Spread Sheets


- An in depth "how to" on using Spreadsheets

MicroCalc


- Complete Mini Spreadsheet program for Apple, Atari, Commodore and TRS-80C

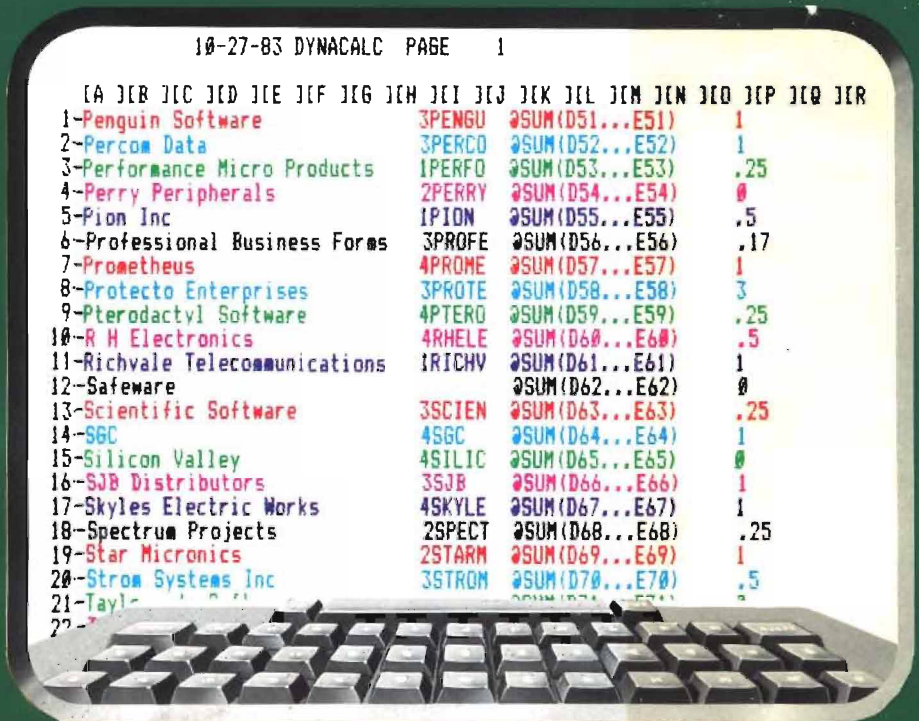


Plus ... Reviews, Columns, and Much Much More



See page 29



See page 83



See page 9



**C64 Alarm Clock
Master Directory for Apple
Color Computer Memory Map
Break Up for Atari**

Calc Result

The Commodore 64™ Spreadsheet that puts you a million miles ahead

CALC RESULT...the one spreadsheet program that turns your Commodore into a powerful financial tool. Offering you every feature found on other more expensive programs for much less the cost.

Flexible...you can view four different areas at once.

Versatile...customize your own print formats.

Distinctive...display beautiful color graphics.

CALC RESULT Advanced is a three-dimensional spreadsheet with built-in HELP function and 32 pages of memory.

For the Commodore 64: \$49.95. For the GBM: \$37.50.

For first-time users, CALC RESULT Easy gives you an easy way to perform financial calculations—easy! For the Commodore 64: \$79.95.

For a down-to-earth demonstration of either version, visit your local dealer today!




Developed by:

nanolite
software ab

-a company in the Datatronic group-

A Product of:

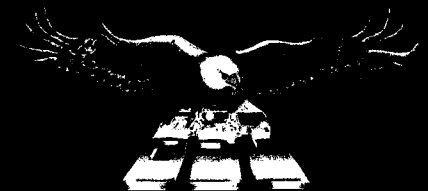

Distributed by:


DES—DATA EQUIPMENT
SUPPLY
213-923-9361

SOFTEAM
800-421-0814

COMPUTER MARKETING
SERVICES, INC.
800-222-0585

WAREHOUSE 1, INC.
EASTERN U.S./800-253-5330
WESTERN U.S.-800-255-0056

BLUE SKY SOFTWARE
Ashland Office Center
Evesham & Alpha Avenues
Voorhees, NJ 08043
609/795-4025

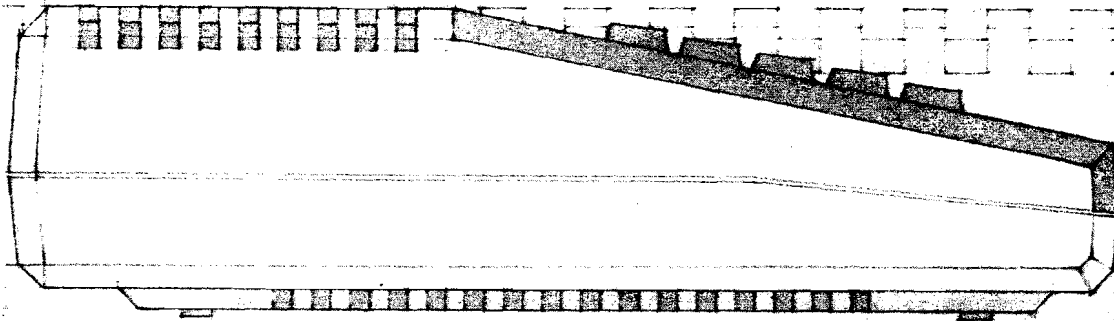


Prints with built-in format or lets you create your own: center, underline. Boldface, elongated, proportional and condensed print.

Inserts and deletes characters, lines or blocks of text.

Duplicates and moves blocks of text.

Searches for and/or replaces words or phrases, one at a time or all at once.

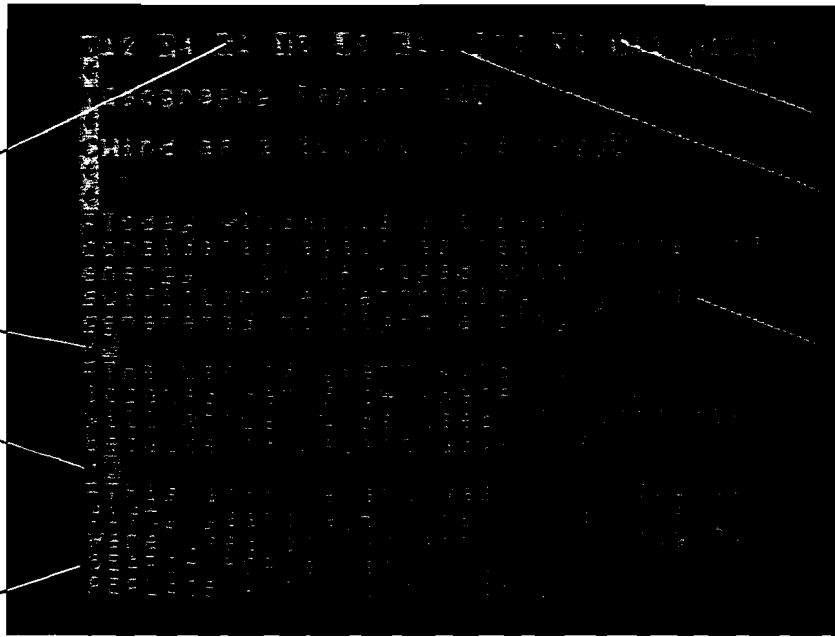

Changes line spacing, margins, print type, paragraph indents anywhere in the document.

Instantly reformats.

Enters text easily, with word wrap, one main menu and helpful prompts.

Creates multi-line headers and footers.

Prints double columns, form letters, multiple copies of a page or document, at the touch of a key.

Numbers pages and creates section numbers automatically.

Corrects spelling (with extra software).

Chains and merges files.

Has "print preview": you can check your copy before it's printed.

You can't find a friendlier, more powerful word processor at twice the price. New AtariWriter™ Under \$100.

Now you can do multi-featured word processing at home, simply. At a family budget price.

Our ROM-based cartridge technology means you can use new AtariWriter on any ATARI® Home Computer (even 16K) for personal and business correspondence, term papers, committee reports, mailings, etc.

It also lets you choose between cassette and disk storage systems.

One very special AtariWriter feature: you can correct as you write, without switching back and forth between Create and Edit modes.

And our memory buffer offers an "undo" command to let you change your mind, and restore text you've just deleted.

Check into our remarkable AtariWriter, and our choice of letter quality and dot matrix printers, also reasonably priced, at Atari dealers. Call 800-538-8543 for dealer nearest you. In California, call 800-672-1404.

You'll do more with Atari Home Computers.



THE MOMENTUM™ GROUP

Presented by  **Gold Disk** ■

Featuring the finest in **educational and home utility** software for the Apple:

ANIMATION GRAPHICS: PAINT PROGRAM

Powerful yet easy-to-use shapes creator and animator for the novice or experienced graphics artist. Apple II or IIe, 48 K. 1 drive. \$35.00

ANIMATION GRAPHICS: SUPER SLIDE SHOW

Powerful slide show creator for novice or expert. Apple II or IIe, 48 K. 1 drive. \$29.00

 **INTRODUCTORY SPECIAL: NOW THROUGH JANUARY 31, 1984: Buy both the PAINT PROGRAM and the SUPER SLIDE SHOW together for one low package price of \$45.00.**

SCANDURA MICRO-TUTOR II SERIES (Grades 1-5)

Interactive and individualized instruction disks with hi-res graphics and the latest advances in cognitive theory. By Dr. Joseph Scandura, specialist in structural learning.

- **Complete Tutorial Arithmetic Series** (4 disks complete). A total system to pinpoint your child's needs in arithmetic and get results. Apple II or IIe, 48 K. 1 drive. \$135.00. With Diagnostic Pre-Test Option, \$160.00.
- **Complete Language Arts Series** (8 disks complete). Helps identify the language skills needed by your child and improves them dramatically. Apple II or IIe, 48 K. 1 drive. \$400.00

LOCUS MICRO-TUTOR (All Grades)

Allows an educator to build a customized course for students on any subject matter with C.A.I. instruction disks. Can also print and store test materials. No programming knowledge necessary. Apple II or IIe, 48 K. 1 drive. \$59.95.

LITMAS DATA SYSTEM

High-speed system for data storage, retrieval and statistical analysis. Written by Eric Sohr, M.D., LITMAS is the only cross-indexing data base for the Apple, with up to 512 keywords possible, and up to 2048 combinations of keyword phrases possible. LITMAS' speed is derived from its unique "bit map" structure. Delightfully-easy to use, excellent manual. Apple II or IIe, 48 K. 1 drive. \$145.00

BRAHMAN HOME HEALTH DISK

Comprehensive medical information program. Written by an E.R. physician, this program can help you live healthier and possibly save someone's life. Factual, inclusive, consumer-oriented . . . Covers emergencies, injuries, drugs, treatments, etc. 2 full disks with 15 programs. Apple II or IIe, 48 K. 1 drive. \$79.95. Annual update available.

PRO-FORMA TAX PREPARER/TAX BREAK ANNUAL

On time and reliable since 1981 — never missed a year's update. A sophisticated tax optimizer which quickly determines the lowest tax by automatically taking into account every benefit, loophole, exclusion, adjustment and credit possible. User-oriented and very fast, typically taking 3 minutes from data input to return preparation. Program generates a detailed 7-page tax summary report indicating what form, line number and amount to be entered to obtain the very lowest tax. Also contains a unique "AUDIT POTENTIAL SCORE" which compares your return with that of a typical taxpayer with the same income, alerting you to any unusually high deductions that could trigger an audit. Apple II or IIe, 48 K. 1 drive. \$129.95. Annual update available.

Distributed by MOMENTUM through your local dealer, or call national order agent for VISA/MC or C.O.D. order at **1-800-368-2260** in Maryland, 301-592-5949. Or write to MOMENTUM, 300 W. 31st St., Baltimore, Md. 21211.



30-DAY MONEY BACK GUARANTEE IF NOT SATISFIED!

APPLE IS A TRADEMARK OF APPLE COMPUTER INC.



Penguin Software™

the graphics people

The Next Generation Is Here!


Strategy



Exotic Adventure



Fantasy Role Playing



Games for Apple, Atari, Commodore, and IBM computers


At Penguin, we don't rely on the same old game formulas, adding to the mish-mash of look-alike games already on the market. We look for creativity, originality, and innovation. Games like **Minit Man**, challenging you with two types of arcade action simultaneously; **Coveted Mirror**, an adventure with animation and arcade games throughout; **The Spy Strikes Back**, an arcade game with strategy and a touch of adventure; **Pensate** and **Tactic 9**, games that make you think; and **Expedition Amazon**, an intriguing and humorous fantasy game.

And Each Is Only \$19.95! More Fun For Your Money From Penguin Software

Write for a free catalog

830 Fourth Avenue, Box 311 Dept. C Geneva, IL 60134 For information - Call (312) 232-1984 Dealer orders only - Call (800) 323-0116

Apple is a trademark of Apple Computer, Inc. Atari is a trademark of Atari, Inc. Commodore is a trademark of Commodore Business Machines, Inc. IBM is a trademark of International Business Machines Corp. Penguins are hard on pool toys.

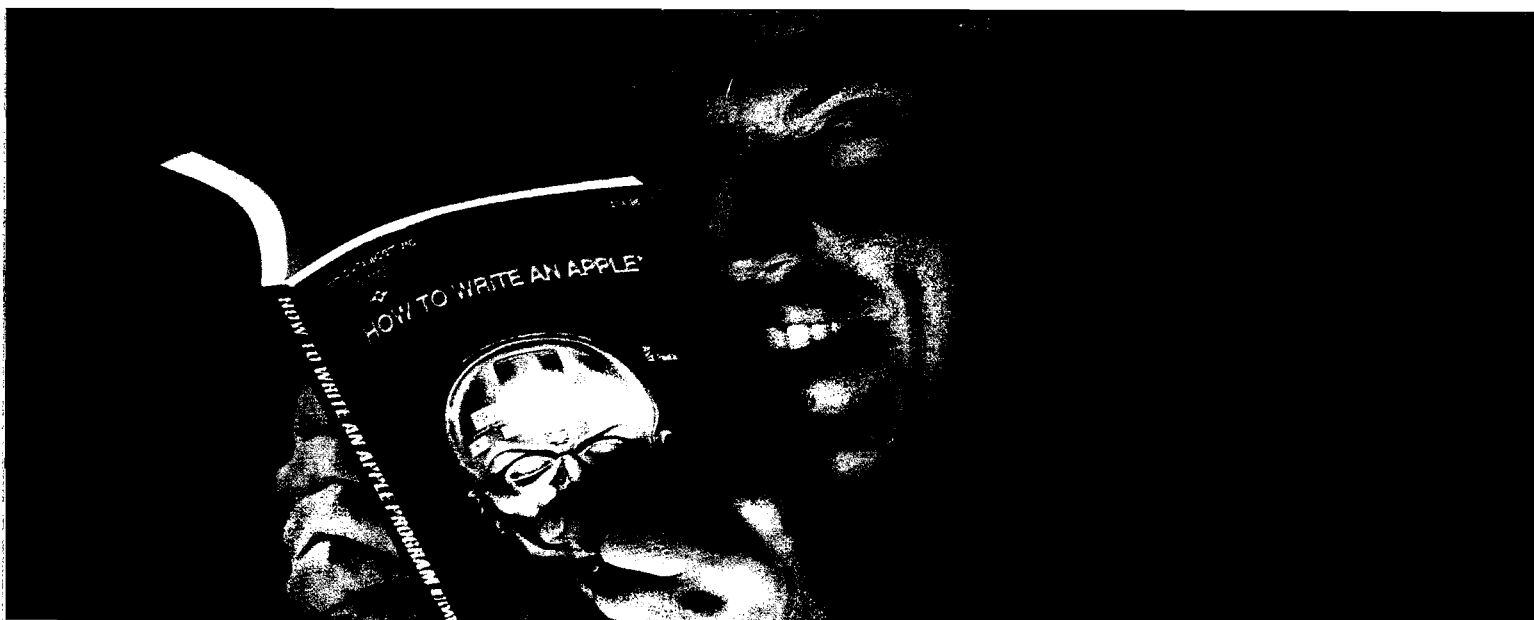

Outsmart your computer.

Show your computer who's boss. Earn its respect. With a Datamost book.

No matter what age or ability level you're at, we have the right book that talks just to you. And your computer. Whether you own an Apple.* An Atari.* Or just about any brand.

All our books are incredibly easy to understand.

Which will make it incredibly easy to understand your computer.

What If You're Scared Of Books About Computers?

Don't be.

Our books are written in friendly, familiar American English. Highlighted with cartoons. And illustrations. So they're fun to read. As well as educational.

And there's over 30 books to choose from. Basic computer learning books to programming books to coloring books.

You won't be bombarded with complicated programming routines until you're ready for complicated programming routines. And no funny technical talk until you've reached

the level where you don't think it's funny.

We'll tell you what you need to know.

And then, when that's understood, you can take the next step toward outsmarting your computer.

Before You Spend Big Bucks On A Computer, Spend Little Bucks.

Once you've decided, kind of, almost, nearly, what type of computer you think you'd like to buy, buy a Datamost book.

It'll help you understand the Atari or the Commodore* or the Apple of your eye.

Before you spend a lot of money. Before you take your computer home.

You'll make a better purchase decision.

Because you'll understand what you're doing. And what you and your computer can do together.

So there won't be any misunderstandings to ruin your new relationship.

How To Get The Most Out Of Your Computer.

Get the most out of our minds.

Datamost books for every computer.

Everybody. Every level.

Pretty smart, huh?

 **DATAMOST**TM INC.
The most out of our minds.


Datamost, Inc., 8943 Fullbright Ave., Chatsworth, CA 91311, (213) 709-1202
*Atari is a trademark of Atari Computer.*Apple is a trademark of Apple Computer.
*Commodore 64 is a trademark of Commodore Business Machines, Inc.



MICRO™

Advancing Computer Knowledge

Spreadsheets

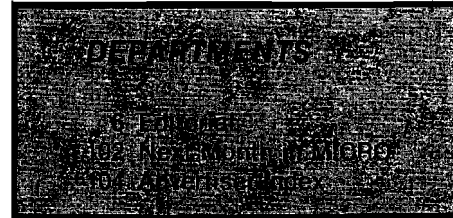

Commodore

- 23 **MICROCalc**
Loren Wright
A mini-spreadsheet for Commodore computers
- 29 **ETA Alarm Clock**
Ian Adam
A real-time clock for C64
- 33 **Commodore Compass**
Loren Wright
Word processing and personal organization
- 55 **Commodore Reviews**

Color Computer

- 19 **MICROCalc**
Loren Wright
A mini-spreadsheet for Color Computers
- 65 **The Memory Man**
John Adams
A program for C6400, C6402, C6404
- 73 **Toco Bits**
John Adams
A program for C6400, C6402, C6404
- 80 **Toco Bits**

Apple

- 39 **MICROCalc**
Phil Daley
A mini-spreadsheet for Apple computers
- 41 **CAT Sort**
Mark Harris
Alphabetize your disk directories
- 47 **Master Directory**
Charles Hill
Organize your disk collection
- 56 **Apple Slices**
Phil Daley
A disk dump program for DOS and PASCAL
- 57 **Apple Reviews**

Atari

- 79 **MICROCalc**
Loren Wright
A mini-spreadsheet for Atari computers
- 83 **Frank Up**
Timothy Stahl
Learn about simple animation
- 89 **From Here to Atari**
Paul Swanson
A Christmas greeting
- 92 **Atari Reviews**
- 97 **Interface Clinic**
Ralph Perry

Is There MICRO After IBM?

I spent five years at a company that developed one of the first "micro-computers". It had only 8K bytes of memory, but could support 20 megabytes of disk, up to 8 keyboard/display stations, printers, modems, and much more. I helped develop the software — from absolutely nothing to a complete disk operating system with multi-user, real-time, editors, assemblers, a "high-level" language, application packages, and much more. At this time, the marketing division of the company could not figure out how to market this new product. Eventually they solved the problem by waiting for two or three years for IBM to catch up technologically and to produce the 3270 terminal. Then, our company emulated it! When I quit in frustration, the President spent well over an hour discussing what I felt was wrong with the company and what I would do to improve it. I suggested that he fire anyone that could spell IBM.

That was in 1974. Now, it almost looks as if history is repeating itself. While others have developed superior systems and lead the way, everyone is embracing IBM. How many of the following developments are directly related to the IBM announcements of the PC and the PCjr: DEC lost about 30% of its market value in a couple of days; TI announced it was discontinuing its TI99/4 completely; Atari con-

tinues to report losses in excess of 100 million dollars per quarter; Apple reduced the price on its LISA and Apple IIe; and all of the trade and financial journals speculate on IBM's dominance in the personal, home, and business markets. Almost every knowledgeable person will admit that IBM is not the best or cheapest — but, it is IBM.

How does this effect you? There will be many pressures on you to consider an IBM as your next microcomputer, or, perhaps to immediately replace your current system. If IBM has the impact predicted by some, then that might be hard to resist.

How does this effect MICRO? MICRO was founded in 1977 to support the 6502 microprocessor which we felt was very good and which was not getting the attention it deserved. In 1981 we expanded coverage to the 6809 for similar reasons. I expect that many popular magazines will reduce and/or eliminate their general 6502/6809 based system coverage as IBM's significance grows. MICRO, however, will remain true to its charter — and continue to bring you the best of the 6502 and 6809 worlds.



Robert M. Tripp
President/Editor-in-Chief

Statement of ownership, management, etc., required by the act of Congress of October 23, 1962, of MICRO, published monthly at Chelmsford, Massachusetts, for November 1983.

The name and address of the publisher is MICRO INK, 34 Chelmsford Street, Chelmsford, Massachusetts. The President/Editor-in-Chief is Robert M. Tripp of Chelmsford, Massachusetts.

The owner is THE COMPUTERIST, Chelmsford, Massachusetts and the names and addresses of stockholders owning or holding one percent or more of the total amount of stock are: Robert M. Tripp and Donna M. Tripp of Chelmsford, Massachusetts.

The known bondholders, mortgagees and other security holders owning one percent or more of the total amount of bonds, mortgages or other securities are: none.

The average number of copies of each issue of this publication sold or distributed through the mails or otherwise to paid subscribers during the twelve months preceding the date shown above is: 21,857.

I certify that the statements made by me above are correct and complete.

Signed: Robert M. Tripp
President/Editor-in-Chief

MICRO
P.O. Box 66
Amherst, MA 01001
(508) 253-1234

Technical Editor
Loren

Contributing Editor
Dave
John
Paul
Richard

Art Director/Publisher
Nancy
Linda
Shelia
Donna
Margaret
Circulation
Dorothy

Publication Director
Robert

Associates
Blaise

MICRO is published monthly
Number 67, December 1983
Subscription price: \$12.00
Single copy price: \$1.00
Advertising rates: \$100.00 per
line per month
Second class postage paid at
Chelmsford, Massachusetts
Postmaster: Please send address
changes to MICRO, P.O. Box 66,
Amherst, MA 01001



MICROSPEC

SOFTWARE MEANS BUSINESS FOR THE COMMODORE 64

When it's time to get serious, it's time to boot up MicroSpec business software. Our complete line of business software is made to give you some real applications for your Commodore 64. From data base management to full accounting software, we have the package for you.

It's attention to detail that makes our packages so beautiful and makes them stand out from the rest. We realize that most people are first time users, so we designed all our packages to be completely menu driven and user prompted for each input. We also know that most people use only one disk drive, so we designed all our packages to virtually eliminate disk swapping. Other features like non destructive input routines really make our software easy to use. But all this doesn't restrict you. Pure random access file structure maximizes your disk capacity and allows you to bring up any record for viewing in less than a second.

In our efforts to put together the best packages available, we worked on more than the software. We took the same approach with the documentation as the software. We made it complete and easily understood for the first time user. We even provide sample reports in many cases.

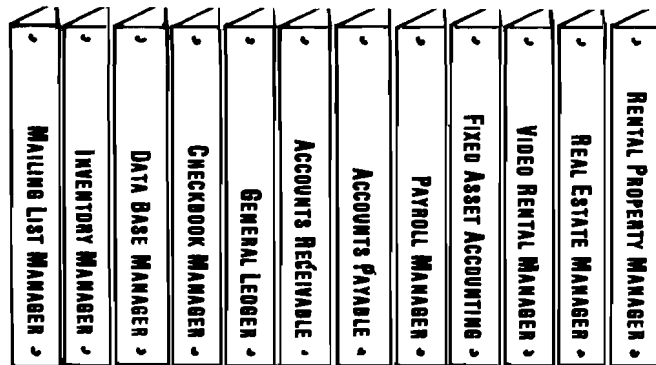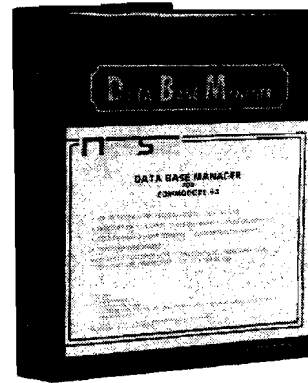

The Demonstration Package, which shows how each program runs, is available for \$19.95. So, if you're serious about your 64, call or write for a complete brochure or go right down to your nearest computer retailer for a demonstration.

**WHEN YOU AND YOUR 64 ARE READY TO GET DOWN TO BUSINESS
GIVE US A CALL**

MICROSPEC

P.O. BOX 863085 • PLANO, TX 75086
(214) 867-1333



**FEATURING PROGRAMS
FOR THE VIC-20 AND
THE COMMODORE 64.**

BOUNTY HUNTER \$24.95*

An adventure in the Old West. Journey back with us into the days of Jessie James and Billy the Kid where the only form of justice was a loaded revolver and a hangman's noose. In this full-length text adventure, you play the role of Bounty Hunter, battling against ruthless outlaws, hostile Indians, wild animals and the elements of the wilderness with only your wits and your six gun. Average solving time: 20-30 hours. If you love adventures, this one is a real treat.

Available for **COMMODORE 64** and the **VIC-20** (with 8K or 16K expander). Available on **TAPE** or **DISK**. Played with **JOYSTICK**.

KONGO KONG \$24.95*

Climb ladders, avoid the barrels the crazy ape is rolling at you, and rescue the damsel. Commodore 64 version features 4 different screens! Available for **COMMODORE 64** and **VIC-20**. Available on **TAPE** or **DISK**. Played with **JOYSTICK**.

GRAVE ROBBERS \$19.95*

Introducing the first **GRAPHIC ADVENTURE** ever available for the **VIC-20** or **COMMODORE 64**! With realistic audio-visual effects, you explore an old deserted graveyard and actually see the perils that lie beyond.

Available for **COMMODORE 64** and **VIC-20**. Available on **TAPE** or **DISK**. Played with **KEYBOARD**.

CHOMPER MAN \$24.95*

Don't let the bullies catch you as you gobble the goodies! This program has 8 screens and still fits in the standard memory.

Available for **COMMODORE 64** and **VIC-20**. Available on **TAPE** or **DISK**. Played with **JOYSTICK** or **KEYBOARD**.

VICTORY SOFTWARE

WOULD LIKE TO WISH OUR CUSTOMERS

**H · A · P · P · Y
H O L I D A Y S**

AND THANK THEM FOR THEIR
PATRONAGE THROUGHOUT THE YEAR.

THE · EARTH · WARRIOR · SERIES

METAMORPHOSIS

\$24.95*

You stumbled into the nest of the Cyglorx and find yourself fighting off robot tanks guarding the Cyglorx eggs. You think you have everything under control and then the eggs start hatching. Available for **COMMODORE 64** and **VIC-20**. Available on **TAPE** or **DISK**. Played with **JOYSTICK**.



CREATOR'S REVENGE

\$24.95*

The creator assembled a massive army of robots and insects to take revenge on the earth. Destroy insects, get treasures, and get the neutron bomb deactivator. Battle robots and destroy the neutron bomb before it annihilates your city. Miss and you must face the mutants. Features 4 different screens.

Available for **COMMODORE 64**. Available on **TAPE** or **DISK**. Played with **JOYSTICK**.

LABYRINTH OF THE CREATOR

\$24.95*



Journey into the most complex and dangerous fortress ever built by the creator. You will encounter deadly robots, skulls, lakes, avalanches, false creators, and a creature who roams 256 rooms relentlessly pursuing you.

Available for **COMMODORE 64**. Available on **TAPE** or **DISK**. Played with **JOYSTICK**.

ILLUSTRATIONS: ELIZABETH HAUCK

*\$3.00 additional for disk.

Check your **LOCAL DEALER** or order directly.

ORDERING: We accept personal checks, money orders, VISA, and MasterCard. Charge orders please include number and expiration date.

OVERSEAS ORDER: Please use charge, or have check payable through a U.S. bank.


CANADIAN CUSTOMERS: If you wish to write a check drawn through a Canadian bank, please multiply the total order by 1.25 for proper conversion.

Add \$1.50 postage and handling per order. PA residents please add 6% sales tax.

VICTORY SOFTWARE INC.

7 Valley Brook Road
Paoli, Pennsylvania 19301
(215) 296-3787



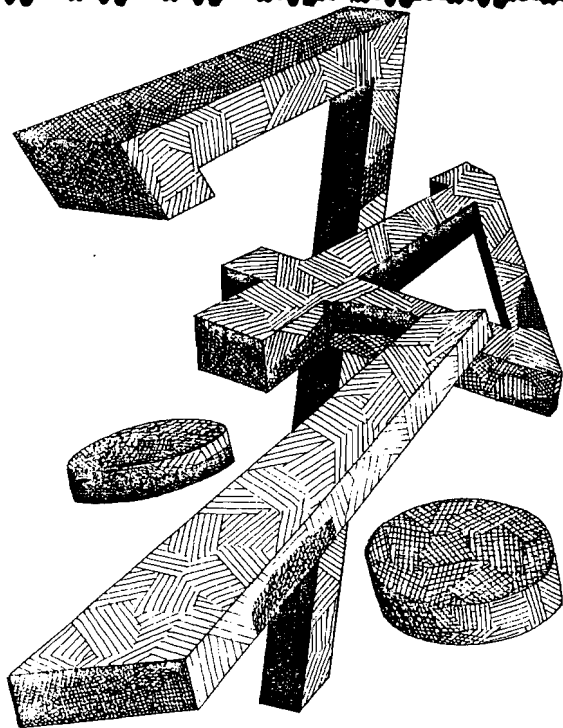

MICRO CALC

by Loren Wright

Micro Calc — What is it?

Micro Calc is a calculation program, not entirely unlike the spreadsheet programs described elsewhere in this issue. It is much simpler than a program such as VisiCalc, and that simplicity results in both advantages and disadvantages. This is not a spreadsheet program, so it is limited to much simpler calculations. However, as you will see from some of the examples presented later, there are many applications for such a quick calculational aide. All you need to know is the rules for BASIC arithmetic expressions.

In this issue we offer a ten-line version for an unexpanded VIC-20 with cassette. We also offer a 15-line version for the TRS-80 Color Computer, 20-line versions for the Commodore 64, PET, and Atari 400/800/1200, and a 23-line version for the Apple.

Haven't I seen this before?

The ten-line version was first presented in the March, 1982, issue of MICRO. A number of typographical errors in that listing have been corrected, and there have been several improvements. The VIC-20 version now includes the following additional features:

- ✓ multiple statements on a line

- ✓ convenient implementation of programmable function keys
- ✓ optional zeroing of user variables

The Apple, Commodore 64, and PET versions have added:

- ✓ multiple statements on a line
- ✓ function key implementation [C-64]
- ✓ optional zeroing of user variables
- ✓ disk support, with file name display
- ✓ error trapping [Apple]
- ✓ a total of 20 lines for calculations
- ✓ separate comment lines, one opposite each calculation line

The Atari version, presented here for the first time, allows *limited* use of IF...THEN, FOR...NEXT, and other BASIC constructions. The Color Computer version, also new, provides 15 lines for calculation, multiple statement capability, and file name display.

How to Use Micro Calc

See the article in each section of the magazine for listings and specific instructions. Below are general instructions.

RUN the program. The screen will fill with a sample screen. This is designed to calculate the monthly payment on an installment loan. On the Commodore 64 and the VIC-20, press the F7 key; on the others press the "@" key. The cursor will disappear for a few seconds, and then a number will appear

next to the P? on the last line. This is the monthly payment calculated on an \$8000 loan for 48 months at 11.9%. You may now move the cursor to the end of any line and delete and retype to try a different calculation. See what happens if the loan goes for only 36 months, or at only 9.9%, or if you decide to borrow \$10000.

There are two kinds of statements allowed — *assignment* and *value request*. An assignment takes the following form:

[variable] = [BASIC numeric expression]

where [variable] is any single-letter floating-point variable name.

A value request takes the following form:

[variable]?

Typical assignments include:

```
X = 5
A = X + 3
J = SIN(X + 3 * A)
P = Y = 5
```

Assignments may be combined on a single line by using semicolons or colons [see instructions for your implementation]:

```
A = 5; P = 3.14159265; Z = PI
```

A=
 M=
 I=
 I=I/1200
 D=(1-(1+I)^-M)/I
 P=A/D
 P=INT(P*100+.5)/100
 P?

PAYMENT: Calculates monthly payment, given starting balance A, number of months M, and annual interest rate I.

K=
 F=3280.8336*K
 F?
 M=INT(F/5280)
 G=F-M*5280
 F=INT(G)
 I=INT((G-F)*12+.5)
 M?
 F?
 I?

METRIC CONVERSION: Converts Kilometers to miles, feet, and nearest inch.

T=
 U=
 C=
 P=3.14159265
 V=180-T-U
 V=P*V/180
 U=P*U/180
 B=SIN(U)*C/SIN(V)
 B?

SOLVE TRIANGLE: Calculate a second side of triangle, given two angles (in degrees) and included side.

A=
 B=
 V=
 V=3.14159265*V/180
 D=A^2+B^2
 E=2*A*B*COS(V)
 C=SQR(D-E)
 C?

SOLVE TRIANGLE: Calculate third side of triangle, given two sides and included angle.

Value requests may not be combined with any other statement on one line.

How it works

The Micro Calc program is written almost entirely in BASIC. None of the floating-point variables named with a single letter is used in the program itself. This allows the user all 26 of these variables on the screen. When the F7 or "@" key is pressed each assignment statement is POKed into a special area of memory called the input buffer. Then a BASIC ROM routine is called to tokenize the expression. Finally another ROM routine that assigns variables (the BASIC LET function) is called to evaluate the expressions. With the Commodore versions, the machine code is only 48 bytes.

The Atari version works a little differently. It uses an alternate screen on which you do your typing. Then, when you press the calculate key ("@"), the lines you have typed are copied to the actual BASIC screen (which is kept hidden from the user) and RETURNS are executed on each line to execute the statements in the immediate mode.

Atari BASIC is quite different from the BASICs on the other computers. The discussion below applies primarily to these other computers. Many of the things discussed will not work on the Atari. The Atari version has extra powers, such as IF...THEN and FOR...NEXT support, though. See the Atari section for details.

When to Clear the Variables

The latest version of Micro Calc allows you to clear the variables at your discretion. This process is only done automatically when the screen is cleared or when a screen is SAVED or LOADED. What are the advantages? If you type in the screen marked "DISTRIBUTE", you will see a good reason why the variables aren't cleared automatically on each calculation. Notice that the line labeled "BALANCE" at the top of the screen assigns a value to the variable B. This is where you type in the starting balance for your loan. The final calculation results in a new value for B. If you now go to the end of the top line and delete it entirely, the calculation will be performed using the B calculated in the previous calculation. Without automatic recalculation, variable M acts as a counter, incrementing once

each time the calculation is repeated. If the first line is left intact, though, the same calculation will be repeated, and, assuming nothing is changed, all the variables except M will come up with the same values as the previous time. If you want to zero M, you can just hit the zeroing key (F8 on C-64 and VIC, double quote on the Apple, and CLEAR on the CoCo), or you can explicitly assign M a value of zero as part of a multiple statement on the first line.

Making a Decision without IF...THEN

The "DEC-TO-HEX" screen demonstrates how to make decisions without using IF...THEN (which is not allowed in Micro Calc). The problem we want to solve is how to get the same screen to work on both signed and unsigned decimal integers. There are two ways to look at a 16-bit binary number. If *unsigned* arithmetic is used, all 16 bits are used, so 1111 1111 1111 1111 is considered to be the equivalent of the decimal number 65535. If *signed* arithmetic is used, the most significant bit indicates whether the number is positive or negative. If the bit is on, the number is negative and the absolute value is determined by taking the two's complement. This same binary number that is 65535 in unsigned arithmetic is -1 in signed arithmetic.

The solution is to test for positive or negative within an arithmetic expression. This is done in the line labeled "SIGNED". The expression $D < 0$ tests whether the original decimal number is negative. If it is, -1 is assigned to the expression, it's multiplied by -16, and 16 is added to the value of H, which is negative. What this really accomplishes is taking the two's complement of the most significant hex digit whenever the original decimal number is negative. The other three hex digits are calculated properly, whether the calculation is signed or unsigned. The Apple and Atari assign 1, instead of -1, to a true statement, so your calculations should reflect the difference. In this example, you would type $H = H + (D < 0) * 16$ for the Apple or Atari. This decision making capability is used similarly in the "HEX-TO-DEC" screen. The variable S is used as a flag: if it is less than 0, then the result is calculated as signed; if it is 0 or greater, then the result is calculated as unsigned. The same change must be made for Atari or Apple screens. Other

applications of this decision-making ability would be testing a divisor to avoid a fatal ?DIVISION BY ZERO ERROR, and testing a counter to see if it has arrived at a specified maximum.

Getting More into Less Space

The Color Computer and VIC-20 versions of Micro Calc offer less space for calculation due to memory or screen-size limitations. On the VIC-20, each line is only 20 characters long, and on both computers there are fewer lines available. Two techniques may be used to get around these limitations.

Multiple statements may be used to perform two short assignments on the same line. For instance, in the "HEX-TO-DEC" screen, the statements $D = D + J * 16$ and $D = D + K$ may be combined into one line by separating them with a colon (semicolon on Commodore machines): $D = D + J * 16 : D = D + K$.

Statements that are too long to fit on one line may be broken into two separate statements by using an *intermediate result*. For instance, the statement $J = \text{INT}[I * D * B * 100 + .5] / 100$ may be replaced (as it was in the "DISTRIBUTE" screen) with two separate statements: $J = I * D * B$ and $J = \text{INT}[J * 100 + .5] / 100$.

Micro Calc Program Description

Notes on all programs

Of necessity, all of the comments in the following description do not necessarily apply to all of the programs. The reader is cautioned to take such comments as 'color' to apply only if your computer has the specified function.

Initialization (A)

The screen is cleared and the border and screen color set. The call to subroutine, READs in the bytes of the machine language program from the DATA statements and POKes them into memory. A number of constants are defined, including the carriage return, delete, and other control characters. The number of lines is set and the arrays are dimensioned accordingly. A subroutine is called, which fills the arrays from the remaining DATA statements to make the sample

START BAL	B=
DAYS/PER.	D=
PAYMENT	P=
ANN %	I=
DAILY DEC	$I=I/36500$
INTEREST	$J=I*D*B$
(ROUND)	$J=INT(J*100+.5)/100$
TO PRINC	$C=P-J$
(ROUND)	$C=INT(C*100+.5)/100$
COUNTER	$M=M+1$
TO INT.	J?
TO PRINC.	C?
# PERIODS	M?
	$B=B-C$
NEW BAL	B?

The following screens require more than ten lines. See the text for techniques to squeeze more assignments into less space.

DISTRIBUTE: Calculate distribution of monthly payment to interest and principal. Enter the requested values for the starting balance B, days/period D, payment P, and annual interest rate I. To continue beyond the first month, perform the calculation once, then delete the first line. The new balance will be retained as the starting balance for the next calculation. The counter M will increment once for each calculation.

DEC INPUT	D=
MS DIGIT	$H=INT(D/4096); I=D-H*4096$
	$J=INT(I/256); K=I-J*256$
	$L=INT(K/16)$
LS DIGIT	$M=K-L*16$
SIGNED?	$H=H-(D<0)*16$
10=A	H?
11=B	J?
12=C	L?
13=D	M?
14=E	
15=F	

(Commodore use ;)

(Atari and Apple use:
 $H = H + (D < 0) * 16$)

DEC-TO-HEX: Calculate hexadecimal equivalent of decimal integer in the range -32768 to 65535.

MS DIGIT	H=
	I=
	J=
LS DIGIT	K=
	$D=H*4096$
	$D=D+I*256$
	$D=D+J*16$
	$D=D+K$
SIGNED?	$D=D+(H<0)*65536$
DECIMAL	D?
A=10	
B=11	
C=12	
D=13	
E=14	
F=15	

(Atari and Apple use:
 $D = D - (H < 0) * 65536$)

HEX-TO-DEC: Calculate decimal equivalent, given four-digit hex number. To interpret as negative number, precede first digit with - sign.

screen. The sample screen is displayed. Then the cursor is positioned for the first line, and a branch is made to enter the normal loop. If you want to skip loading the sample screen, delete the appropriate line.

Main Program Loop (B)

In general, the program consists of testing for characters from the keyboard. Certain characters are considered to be *control* characters and must be dispensed with in special ways. Some of these involve branching to subroutines; others are dealt with immediately. Characters that aren't control characters are either accepted and added to the end of the current line, or they are rejected. After each character is processed, the flow usually goes back to the main loop. If the next character begins a new line, then a branch is made to reposition the cursor.

Whenever the screen is cleared, the arrays are cleared and the screen blanked. If the new line contains a value request statement, then the line is blanked out to remove the printed value. The current line is printed, followed by the cursor. Characters from the keyboard are processed. Control characters are tested and other characters are added to the current line.

If the character causes the length of the line to be exceeded, then a cursor down or return is executed. Then the line number counter is incremented and tested. If maximum lines has been exceeded, then the necessary adjustments are made to start work on the first line. Otherwise, the cursor is positioned at the beginning of the next line.

Delete is handled by checking for an empty line. The necessary screen display parameters are set, and strings are adjusted with the `LEFT$()` function.

The up-cursor character is handled in the following manner. If the new line is 0 then the line counter is set to maximum lines, and the cursor is adjusted accordingly. Otherwise, the cursor is moved up one line.

The calculation command branches to a subroutine which handles the calculation and printing the results. The cursor is positioned at the end of the top line after the calculation.

Comment Field Handling (C)

The operation here is very similar to that of the calculation field. Things are simpler, though, since nearly every

character is allowed. Everything is printed in light green, and the remainder of each line is left unreversed.

Input Subroutine (D)

This is called by the main editor program. The various control characters are tested, then for the other characters. Acceptable ones cause return, while unacceptable ones fall through to get another character. This continues until an acceptable character is received.

Calculation Processing (E)

The calculation process may take several seconds, depending on the screen contents. Each line is examined with value request statements handled by one subroutine. The requested variable is placed into the appropriate element of the string array. An illegal line, with fewer than three characters, is skipped. Other lines are handled by the subroutine where the values are assigned by the machine language routine.

Assignment Handling (F)

Each assignment line is POKED into the input buffer, character by character. Whenever a colon [semicolon] is encountered, that line is processed [a zero is POKED for the Commodore programs]. When the end of the line is reached, the machine-language routine is executed, and the RETURN goes back to the calling routine.

Get Character (G)

The GET function accepts any character from the keyboard. If there is no character, then the program loops until there is.

File Handling (H)

The subroutine handles SAVEing the calculation and comment arrays. Similarly, the LOAD subroutine handles loading these arrays from tape or disk. Some of the programs check for disk errors and print error messages or allows a new file name.

The prompt portion sets up a number of variables according to the responses. A disk or tape variable is set and appropriate file name strings established to either READ or WRITE a sequential file. Then the proper channel is opened and the arrays either read from or written to the output device. (The Commodore routine includes an additional subroutine to reread the

machine-language routine back into the cassette buffer, since all or part of it was destroyed during the file operation.) Then the screen is redisplayed, containing the old contents if it was a SAVE operation, and the new contents if it was a LOAD.

Value Request Processing (I)

As each line is processed in the subroutine, only lines ending in a "?" are sent here. Therefore, the first character is the variable name. Each letter is converted into a number from 1 to 26. Flow of control is passed by the ON...GOSUB structure with 26 possible branches. The rest of this subroutine consists of small subroutines, one for each letter of the alphabet. The value of the named variable is assigned to the appropriate element of the value array.

Screen Print With Values (J)

This causes the whole screen to be printed with values shown after each "?". The values are converted to a string using the `STR$()` function, and the remainder of the line is filled out with the appropriate number of reversed underline characters.

Read Machine Language Routine (K)

The DATA statements contain the individual bytes of the machine-language program. The READ statement is used for each byte, and it is POKED into successive bytes of memory. This routine is called once at the start of the program, and [for Commodore] again whenever a LOAD or SAVE operation takes place.

Print Screen (L)

The first time the subroutine is called, it prints the standard start-up screen. Later, the screen is printed with current array values and comments. Each screen line is printed according to the contents of the arrays. The current file name, if any, is printed at the bottom of the screen.


Clear User Variables (M)

Each of the user variables is set to zero. This routine is used when using successive calculations, such as $A = A + 1$, to start over with different values.

The rest of the program consists of the DATA statements used for the machine-language program and the initial screen contents.

MICRO

80 COLUMN PRINTER SALE—\$149.00*

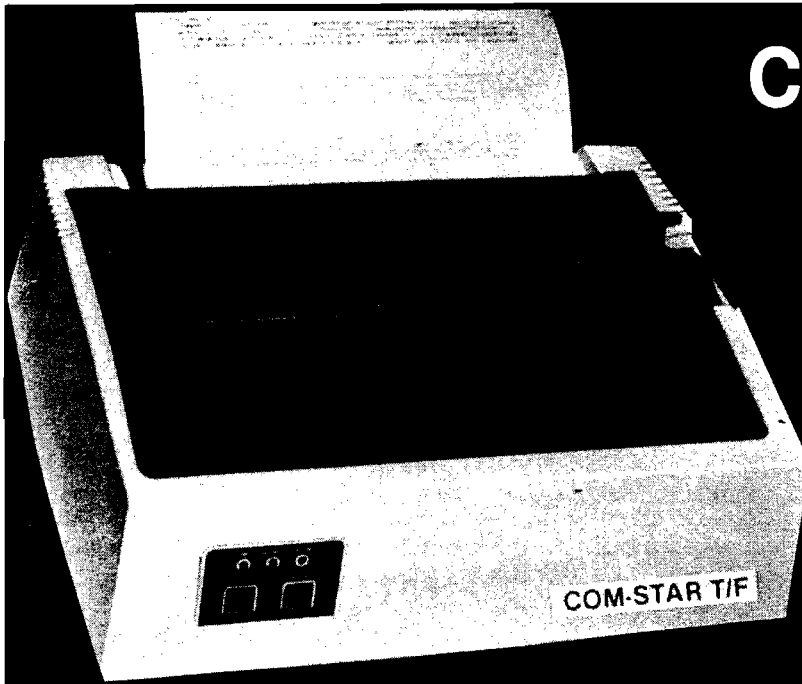

COM-STAR T/F

Tractor
Friction
Printer

only **\$219**

(Parallel or Serial)

- Lowest price quality tractor friction printer in the U.S.A. • Fast 80 characters per second
- 40, 46, 66, 80, 96, or 132 characters per line spacing • Prints labels, letters, graphs, and tables
- List your programs • Print out data from modem services

*STX-80 COLUMN PRINTER—\$149.00

Prints full 80 columns. Super silent operation, 60 CPS, prints Hi-resolution graphics and block graphics, expanded character set, exceptionally clear characters, fantastic print quality, uses inexpensive thermal roll paper!

DELUXE COMSTAR T/F PRINTER—\$219.00

The Comstar T/F is an excellent addition to any micro-computer system. (Interfaces are available for Apple, VIC-20, Commodore-64, Pet, Atari 400 and 800, and Hewlett Packard). At only \$219 the Comstar gives you print quality and features found only on printers costing twice as much. Compare these features.

- **BI-DIRECTIONAL PRINTING** with a LOGIC SEEKING CARRIAGE CONTROL for higher through-put in actual text printing. 80 characters per second.
- **PRINTING VERSATILITY:** standard 96 ASCII character set plus block graphics and international scripts. An EPROM character generator includes up to 224 characters.
- **INTERFACE FLEXIBILITY:** Centronics is standard. Options include EIA RS232C, 20mA Current Loop.
- **LONG LIFE PRINT HEAD:** 100 million character life expectancy.
- **THREE SELECTABLE LINE SPACINGS:** 6, 8 or 12 lines per inch.

• **THREE SELECTABLE CHARACTER PITCHES:** • 10, 12 or 18.5 characters per inch. 132 columns maximum. Double-width font also is standard for each character pitch.

• **PROGRAMMABLE LINE FEED:** programmable length from 1/144 to 255/144 inches.

• **VERTICAL FORMAT CONTROL:** programmable form length up to 127 lines, useful for short or over-sized preprinted forms.

• **FRICTION AND TRACTOR FEED:** will accept single sheet paper.

• **224 TOTAL CHARACTERS**

• **USES STANDARD SIZE PAPER**

If you want more try —

Premium Quality COMSTAR T/F SUPER-10X PRINTER—\$299.00 More Features Than RX-80

For \$299 you get all of the features of the Comstar T/F plus 10" carriage 120 cps, 9 x 9 dot matrix with double strike capability for 18 x 18 dot matrix. High resolution bit image (120 x 144 dot matrix), underlining, backspacing, left and right margin settings, true lower descenders, with super and subscripts, and prints standard, Italic, Block Graphics, special characters, plus 2K of user definable characters. For the ultimate in price performance the Comstar T/F Super 10" leads the pack!

Double Immediate Replacement Warranty

We have doubled the normal 90 day warranty to 180 days. Therefore if your printer fails within "180 days" from the date of purchase you simply send your printer to us via United Parcel Service, prepaid. We will IMMEDIATELY send you a replacement printer at no charge via United Parcel Service, prepaid. This warranty, once again, proves that WE LOVE OUR CUSTOMERS!

15 DAY FREE TRIAL

OTHER OPTIONS

Extra Ribbons	\$ 5.95
Roll Paper Holder	32.95
Roll Paper	4.95
5000 Labels	19.95
1100 Sheets Fan Fold Paper	13.95

Add \$17.50 shipping, handling and insurance. Illinois residents please add 6% tax. Add \$40.00 for CANADA, PUERTO RICO, HAWAII, ALASKA orders. WE DO NOT EXPORT TO OTHER COUNTRIES. Enclose cashiers check, money order or personal check. Allow 14 days for delivery, 2 to 7 days for phone orders. 1 day express mail available!! Canada orders must be in U.S. dollars.

PROTECTO
ENTERPRISES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

SUPER-10"

ABCDEFGHIJKLMN OPQRSTUVWXYZ
ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890

GRAFSTAR (Apple interface card - "Like Grappler Plus") SALE \$69.00.

SUPER COM-STAR T/F 15" PRINTER SALE \$379⁰⁰

**NOW YOU CAN BUY A TRACTOR-FRICTION
15" CARRIAGE PRINTER
FOR AN INCREDIBLE \$379⁰⁰**


	star COMSTAR 15"	EPSON* MX-100/Type III	OKIDATA* MICROLINE 83A
Warranty <small>This refers to standard warranties. Coverage varies by manufacturer. Complete information is available at your place of purchase.</small>	180 day	90 day	90 day
Buffer	2.3 K	1 Line	1 Line
CPS	100	80	120
CPI	10.12.17	10.17	10.17
Over 80 Type Fonts	Yes	No	No
Block Graphics	Yes	No	No
Special Character Sets Available	Yes	No	No
Roll Paper Holder Standard	Yes	No	No
Suggested Retail Price <small>Prices shown are based on data from each manufacturer. Actual retail prices may vary.</small>	\$599.	\$749.	\$899.
Special Price	\$379.		

*Epson and Okidata are registered trademarks of Epson America, Inc. and Okidata Corp., respectively.

Now you can save big on the Com-Star 15" dot matrix printer from Protecto, while they last!

It's the 15½" carriage printer that combines the most advanced features with a price that's better than ever. And component by component, Com-Star 15" is so reliable, Protecto can warranty it for up to twice as long as its major competitors.

The popular Com-Star 15". A great printer at a truly great price. When you add it up, it figures to be a super sale.

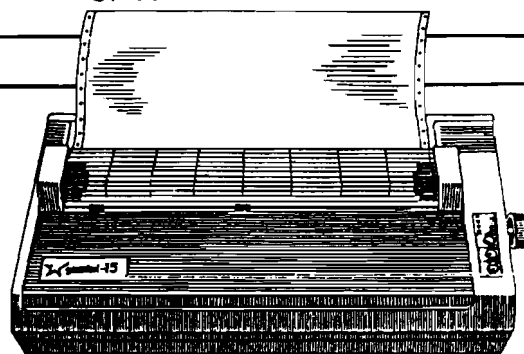

- LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
- BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • FREE CATALOGS

Add \$17.50 for shipping, handling and insurance. Illinois residents please add 6% tax. Add \$35.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. VISA — MASTER CARD — C.O.D.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

Spreadsheets

by Phil Daley

What does a Spreadsheet Do?

There are many software packages on the market today which have a multitude of uses for business and accounting applications, whether you own a multi-national conglomerate or are managing your own checkbook. Some are fill-in-the-blank accounting programs designed with a specific job or a specific set of jobs in mind. These are usually known as accounting packages: general ledger, accounts receivable/payable, payroll, and others. Many are designed to be general in nature, so that you can program your own particular functions into the software. These are spreadsheet packages that can do accounting functions, as well as act as a mini data-base. Some are designed to be project oriented with specific abilities to organize and layout planning strategies. Others are designed to be multi-purpose with planning and spreadsheet capabilities combined.

This month we plan to concentrate on spreadsheet packages — how do they work, what do they offer and who can benefit from them. While each product has its own syntax and specifications, many of the features can be found on all of the spreadsheet packages and a look at the generic options will give you an overview of what they can do.

The standard display screen is a series of columns (normally designated alphabetically) and rows (normally designated numerically), blank at the beginning. Each intersection of row and column has a name (A1, C67, GG145...). These individual blocks are called "cells".

Each cell can contain one piece of information. You can define the size and type of the individual cells, or whole columns or rows. The size parameter can help save space on the screen by keeping the columns close together. The type parameters (such as Label, Integer, \$, left or right justified...) help prevent input errors and neaten the appearance of the screen format. Each cell can be a number (value), name (label) or computation (formula). Values can be positive or negative, integer quantities or floating-point constants; labels can be names or numbers; formulae can contain any of the allowable computations grouped in any desired manner by use of parentheses. Cells can also reference other cells by name. If cell D8 contained B5, then the value of D8 would be the same as the value of B5. If it contained @SUM(A1...A124), then the value of D8 would be the sum of the values contained in all the cells from A1 through A124.

The real advantage to an electronic spreadsheet program is the instant feedback for each calculation entered. Upon entering a formula, the spreadsheet is immediately

recalculated (assuming recalculation is turned on), and the value presented on the screen. This gives you a 'rough estimate' glance to see if the formula is at least in the ballpark. Normally, when writing a program to perform calculations, you don't get a chance to see the output of any particular formula until you run the whole program, or at the minimum, a compilable module.

Basic Functions

In addition to the standard + - * / < > and ^, most spreadsheet programs contain functions similar to the following:

@ABS	Return absolute value
@AND	Return TRUE if <i>all</i> TRUE
@AVERAGE	Calculate mean of list
@EXP	Raise <i>e</i> to a power
@FALSE	Return FALSE
@IF	Select value based on condition
@INT	Truncate value
@LN	Return natural log
@LOG	Return log base 10
@MAX	Return maximum value in list
@MIN	Return minimum value in list
@NOT	Return TRUE if FALSE else FALSE
@NPV	Calculate Net Present Value of list at discount rate
@OR	Return TRUE if <i>any</i> TRUE
@PI	Return value of Pi
@ROUND	Round a number to specified places
@SQRT	Return the square root
@SUM	Calculate the sum of a list
@TRUE	Return TRUE

Many of the newer spreadsheets also contain transcendental functions, standard deviation, internal rate of return and other specialized accounting functions.

@ACOS	Arc-cosine function
@ASIN	Arc-sine function
@ATAN	Arc-tangent function
@COS	Cosine function
@DIF	Calculate the difference of a list
@FRA	Return the fractional part of expression
@IRR	Return the internal rate of return
@PDIF	Return the percentage difference
@SIN	Sine function
@STDDEV	Return standard deviation of a list
@TAN	Tangent function

There are many different commands to operate on a worksheet, I will mention a few that should be considered when buying a spreadsheet software package. All have cursor movement from column to column, and row to row. Some allow movement to rows and columns by multiple movements. In addition to particular formats mentioned above, some work sheets allow "hidden" cells [the data is not displayed]. You should be able to set the width of columns. The replicate command should have a "relative" copy, to copy cells with row and column orientation included. Most work sheets allow "windows", either horizontal or vertical screen splitting, with synchronous or unsynchronous scrolling. Some packages allow a "data save" to a textfile that can be operated on by a BASIC program, data base manager, mailing list or text processor.

Who Can Benefit?

There are many uses for a spreadsheet package, ranging from storing data in lists to complicated accounting procedures. The main limitation on all home computers is the amount of available RAM to store the input information. In addition to the memory consumed by the program, most of the spreadsheet programs require that *all* of the data be in memory *all* of the time. Even with the efficiency of storing data in a compact format, it doesn't take a very great number of columns and rows to deplete a 64K machine. (One new program, *Multiplan*, implements a "virtual memory" system which allows spreadsheet data to be as large as available disk space by swapping into and out of memory, the sections of the data currently being used.) This explains all of the interest in additional RAM cards to increase the available RAM to 128K or more. Some spreadsheets allow up to 512K of additional memory.

Very specific applications that can be expected to remain unchanged, such as maintaining a checkbook, are probably handled more easily with a dedicated program. A spreadsheet is very useful for applications that change

often, being easily modifiable, and with instantaneous feedback as to the correctness of the calculations. Some applications, such as your income tax, change with each use. A spreadsheet set up to calculate your Form 1040 could be easily modified each year to account for changes in the form by the IRS. A dedicated program designed for a particular year would have to be rewritten each subsequent year.

Small database applications — for instance, lists of names, addresses and telephone numbers — can be easily maintained and sorted (only newer products have automatic sorting capability) by zip, last name, etc.

The ability to see and adjust the screen formatting is also very useful. Printed output for monthly finances, budgets and other reports is quickly generated and the templates can be used again each time a new report is needed.

Anyone connected with a statistically-oriented team (what sport isn't?) can keep records and all the associated stats easily and make updates quickly and effortlessly. Bowling league, Little League and local school teams can benefit from accurate reports generated on a timely basis.

Some Samples of Use

Spreadsheets can be used for tracking expenditures against a proposed budget. Many companies have to allocate an advertising budget amongst several different media and products. It is a simple matter to design an overall budget plan and then juggle figures on the spreadsheet to develop a good mix between emphasized products and target audiences. Recalculation of the budget totals is swift and feedback of the effects of various strategies is essentially, instantaneous.

Bid preparation can be handled well on a spreadsheet. Since pinning down all the expenses is very difficult, and profit margin depends a great deal on the accuracy of the bidding, a tool for juggling the numbers facily is a great

Program	Manufacturer	City, State	ZIP	Computer
A Financial Wizard 1.5	ON LINE Computer Centers	10944 North May	Oklahoma City, OK	73120 Atari
Accountant	Decision Support Software	1438 Ironwood Drive	McLean, VA	22101 Apple
BusiCalc	Skyles Electric Works	2316 South Whisman Road	Mountain View, CA	94041 Pet/C64/Vic
Business Planner	Duosoft Corporation	1803 Woodfield Drive	Savoy, IL	61874 Apple
Business Planning Tool	Sofstar	13935 Highway 1	Juno Beach, FL	33408 Apple
Calc Result	Computer Marketing Services	388 West Marlton Pike	Cherry Hill, NJ	08002 C-64
CalcStar	MicroPro International	33 San Pablo Avenue	San Rafael, CA	94903 Apple CP/M
Desktop PLAN	Visicorp	2895 Zanker Road	San Jose, CA	95134 Apple
DYNACALC	Computer Systems Center	13461 Olive Blvd.	Chesterfield, MO	63017 Flex
EliteCalc	Elite Software	Box 11224	Pittsburgh, PA	15238 TRS-80C
FCS-EPS	EPS	One Industrial Drive	Windham, NH	03087 Apple
Financial Analysis	Aerona /Execuware	4530 Park Rd., Suite 348	Charlotte, NC	28289 Apple
Financial Modeling	Georgia Tech Research	225 North Avenue	Atlanta, GA	30332 Apple CP/M
Financial Planner	Ashton-Tate	18150 N. Jefferson Blvd.	Culver City, CA	90230 Apple CP/M
FDRECAST	Northwest Analytical	1532 Southwest Morrison	Portland, OR	97205 Apple CP/M
LogiCalc	Software Products International	10343 Roselle Street	San Diego, CA	92121 Apple
MAGICALC	Artsci	5547 Satsuna Avenue	North Hollywood, CA	91601 Apple
microFINESSE	The P-E Consulting Group	Park House, Egham	Surrey, England	Apple
Micro-DSS/Finance	Ferox Microsystems	1701 N. Fort Meyer Dr.	Arlington, VA	22209 Apple
Multiplan	Microsoft Corporation	10700 Northrup Way	Bellvue, WA	98004 Apple/C64
Optimizer	Supersoft	P.O. Box 1628	Champaign, IL	61820 Apple
PeachCalc	Peachtree Software	3445 Peachtree Rd. NE	Atlanta, GA	30326 Apple CP/M
PLAN80	Digital Marketing Corporation	2363 Boulevard Circle	Walnut Creek, CA	94595 Apple CP/M
Senior Analyst II	Apple Computer Company	20525 Mariana Avenue	Cupertino, CA	95014 Apple
Spectaculator	Radio Shack	388 One Tandy Center	Fort Worth, TX	76102 TRS-80C
Super "Color" Calc	Nelson Software Systems	9072 Lyndale Avenue, So.	Minneapolis, MN	55420 TRS-80C
SuperCalc	Sorcim Corporation	2310 Lundy Avenue	San Jose, CA	95131 Apple CP/M
TABULA RASA	Computer Systems Consultants	1454 Latta Lane	Conyers, GA	30207 Flex
Visicalc	Visicorp	2895 Zanker Road	San Jose, CA	95134 Apple/Pet
VI-CALC	United Microware Industries	3503-E Temple Avenue	Pomona, CA	91768 Vic

help in maximizing profit. All of the various factors — consulting, labor, equipment, materials and sub-contracting — can be charted, with considerable “what-ifing” being done with the figures to arrive at an appropriate idea of expenses. The expected margin of profit can be added with some assurance that the final figures have taken a good deal of the risks involved into consideration.

Many small accounting type problems can be easily solved without resorting to large, unwieldy, fixed-format accounting packages. This is especially true of smaller businessmen who might not want to spend a lot of money for special accounting software that would need to be tailored to their own particular business. A spreadsheet can do multiple checkbooks, prepare invoices and purchase orders, track accounts payable and receiveable, and a multitude of other accounting functions. While none of the “just” spreadsheet programs can match a fully developed accounting system, some of the newer spreadsheets can do most, if not all, of the job.

At MICRO, we use a spreadsheet program for much of our work involving simple accounting procedures and data-base management. It keeps all of our paper work under control and we only have to enter names and addresses one time, with everyone sharing the files for additional uses. For instance, to help with the organization of the advertising department, we have a list of advertisers, such as figure 1, which can include such information, in addition to names and addresses, as account number, advertising pages, page size, page rate, commissions, and sales regions.

From such a master list, it is a simple matter to sort the list monthly by current page size, deleting the accounts that are currently inactive, alphabetizing the remaining accounts for a monthly advertising summary. The next step is to sort the list by region (figure 2) so that each sales representative can see the totals for his region and in comparison to the other regions. We can add magazine page numbers to the list (figure 3) and dump the list to a text file, instead of the printer, and transfer it to the typesetter to compose the advertisers' index without rekeying all the names. (See MICRO 59:54 for further details of our typesetting communications.)

A quick look at a work sheet to figure monthly income-expenses shows how simple a work sheet template can be, but still have a useful function. With a minimum of effort, each month, a quick summary can be prepared by entering the few necessary figures.

Figure 4 illustrates how formulae are stored in cells. The third column (C) contains the formula for the sum of cells Dn and En where n is the row number. This column is easily filled in by defining the formula in cell C5, and then, using the Replicate command with “relative” values, copying that cell into C6...C78. The formula in C80 is the sum of column C, and that is replicated into D and E. The screen display can show either the calculated values or the actual formulae. This is set from the command line.

This figure is a split example to demonstrate the relationship between formulae in the cells and the values in the cells. The chart was printed out once in formula dump mode and once regularly and then superimposed to give the illusion of the formulae being present with the values.

Record keeping for a team such as baseball or soccer is easily managed on a work sheet (figure 6). Such a list can

easily be sorted by last name for a team roster, by birthdate for eligibility and yearly updating, by phone numbers for a telephone tree, by zip code for a mailing list or by other factors such as individual game statistics or personal factors.

Other topics that lend themselves to worksheet solving include accounts receiveable ageing, invoicing from inventory, cost recovery, production scheduling, estimating, checkbook ledger, engineering formulae, accounts payable, payroll reporting, monthly sales reporting, daily inventory and financial forecasting.

Advanced Uses

There are additional features to be found on most spreadsheet packages. These are more complicated to use and require a deeper understanding of how a worksheet functions. These include, but are not limited to:

@CHOOSE Returns the value of a particular cell
@COL Returns the current column number
@COUNT Returns the number of cells in a range
@ERROR Returns error message
@INDEX Returns value next to match
@ISERROR Returns TRUE if ERROR, otherwise FALSE
@ISNA Returns TRUE if NA, otherwise FALSE
@LOOKUP Returns value less than or equal to match
@NA Returns NOT AVAILABLE error
@ROW Returns the current row number

The @CHOOSE function is useful for selecting a value from a pre-determined list. It is similar to @LOOKUP, except that the table does not have to be defined in the worksheet proper. For instance, if you knew that in Trial 1 you wanted to use an interest rate of 11.5%, in Trial 2 you would use 13.5%, and in Trial 3 you would use 17.875%, by defining cell C4 to contain the particular number of the trial you are running, the following formula can be used anywhere in the sheet to substitute for the appropriate interest rate:

@CHOOSE(C4,.115,.135,.17875)

When cell C4 contains a 1, the value returned is .115, if it has a 2, then the value is .135, and if it has a 3, the value is .17875.

The @COL function is useful for indexing items that ascend by increments of one, such as dates. The value for column A is 1, B is 2 and so on. If you replicate a formula such as

1982 + @COL

across the top of the worksheet, you will quickly generate a yearly sequence.

The @ROW function is useful for indexing items that ascend by increments of one, such as counters. The value for row 1 is 1, 2 is 2 and so on. If you replicate a formula such as

@ROW-6

down the side of the worksheet starting in row 7, you will quickly generate a numbered list.

The @COUNT function is useful for determining n, the number of items used in calculating a particular formula. Such a determination is necessary in many statistical analyses, such as NPV or STDDEV. @COUNT includes only values in the specified range, it does not

1	A	11	B	11	C	11	D	11	E	11	F	11	G	11
1	(ADV-M02)	Advertising Pages			Advertiser by Month									
2		Year												
3	Advertiser	A/C #	1983	045	N66	Contract	Reg							
4														
5	AB Computers	2ABCOM	2	1	1	3/84	02							
6	Acorn Software Systems	2ACORN	5	25	25		04							
7	Alternative Energy Products	2ALTEP	4	5	5	6/84	04							
8	Amplify	2AMPLI	5	25	25	4/84	03							
9	Apogee	2APOGEE	33	33	33		04							
10	Apple Tree Electronics	2APPEE	34	17	17	4/84	04							
11	Arbutus Total Soft	2ARBUT	1	5	5	6/84	04							
12	Ark Computers	2ARK	1	1	1	4/84	04							
13	Artsci	2ASDTE	1	1	1		04							
14	Atari Home Computers		1	1	1	10/84	02							
15	Atari Program Exchange		1	1	1		04							
16	Aurora Software	2AUROR	17	17	17		03							
17	Avalon Hill		1	1	1		02							
18	Check-Mate	2CHECK	2	1	1	12/84	01							
19	Commander Magazine	2COMMA	25	25	25	6/84	04							
20	Communications Electronics	2COMM	1	1	1		03							
21	CompuLink		66	33	33	2/84	04							
22	CompuLink		1	1	1		04							
23	CompuLink		1	1	1		04							

Figure 1. A sample worksheet of advertisers

1	A	11	B	11	C	11	D	11	E	11	F	11	G	11
1	(ADV-M02)	Advertising Pages			Advertiser by Month									
2		Year												
3	Advertiser	A/C #	1983	045	N66	Contract	Reg							
4														
5	Check-Mate	2CHECK	2	1	1	1/84	01							
6	Computer Exposition	2COMP	66	66	66		01							
7	Computer Science Engineering	2CSCIE	25	25	25		01							
8	Granite Computer Sales	2GRANT	25	25	25		01							
9	Inter-Action	2INTER	1	5	5	6/84	01							
10	Leading Edge	2LEAD1	2	1	1		01							
11	Micro-Spart	2MSPART	2	1	1		01							
12	Microbits	2MICB	33	33	33		01							
13	Monarch Data Systems	2MONAR	25	25	25	5/84	01							
14	Omega Sales International	2OMEGA	1	1	1	12/84	01							
15	Performance Micro-Products	2PERFO	5	25	25	5/84	01							
16	Pion Inc	2PION	1	5	5	3/84	01							
17	Richvale Telecommunications	2RICHV	2	1	1		01							
18														
19	Avalon Hill	2AVAL	1	1	1		02							
20	AB Computers	2ABCOM	2	1	1	3/84	02							
21	Computer Mail Order	2CMAIL	4	2	2	2/84	02							
22	Computer Marketing	2CMKTG	2	1	1	3/84	02							
23	CompuLink	2COMLINK	2	33	25		02							

Figure 2. Sample worksheet sorted by account region

1	A	11	B	11
1	(ADV-M02)	Page #		
2				
3	Advertiser			
4				
5	AB Computers	93		
6	Acorn Software Systems	18		
7	Alternative Energy Products	94		
8	Amplify	28		
9	Apogee	109		
10	Apple Tree Electronics	92		
11	Arbutus Total Soft	6		
12	Ark Computers	199		
13	Aurora Software	45		
14	Avalon Hill	57		
15	Check-Mate	17		
16	Commander Magazine	19		
17	Communications Electronics	23		
18	CompuLink	8		
19	Computer Exposition	78		
20	Computer Mail Order	84-85		
21	Computer Marketing	1		
22	Computer Science	1		
23	CompuLink	1		

Figure 3. Sample worksheet with pages added for index

count labels or blanks. You can specify a list, range or list of ranges in the argument.

The @LOOKUP function is very useful to read elements of a table included in the worksheet. Suppose a software package had the following price based on quantity:

Quantity	Price/Package
100	22.95
300	17.95
500	14.95
800	11.95
000	9.95

This would be entered in the worksheet in two adjacent columns, say D and E. The price per document can be entered anywhere in the worksheet by the formula:

@LOOKUP{B2,D1...D5}

The @LOOKUP function would determine the quantity ordered from cell B2, say 650, and then skim through the D1...D5 column looking for a value larger than the current value. When it finds one, in this case at D4, it then backs up one entry and reads the value in the next adjacent column, here 14.95 (from E3), and returns with this value. It is also possible to specify the range to be searched as a row, and the value will be taken from the row below the searched row.

The @INDEX function is the same as the @LOOKUP function [cf.], except that an exact match is required.

The @ERROR function is used in several different ways. @ERROR displays the word "ERROR" in the current cell, and in any cells with formula references to that cell. It can be used in tables with CHOOSE, INDEX or LOOKUP formulae to screen out invalid table entries. It can also be used in combination with an @IF statement to exclude certain values from an acceptable range. For instance, if you wanted to sum a range of numbers only if A1 was in the range of 50-100, then the following formula could be used:

@IF{@AND(A1.. = 50,A1.. = 100),@SUM{B1...B20},@ERROR}

This would check the value of A1 before evaluating the formula and would return "ERROR" if the value was outside the specified range.

The @NA function is used for template generating. All of the cells which require entered data are first flagged with @NA. Later, after the data has been entered, a simple test can be used to check to see if all the cells have been updated.

The @ISERROR function tests any type of argument and returns TRUE if the argument is an ERROR condition, false if it is not an ERROR. This is a good way to test whether one or more calculations has produced an error:

@IF{@ISERROR(A3),0,A3*B5}

The @ISNA function tests any type of argument and returns TRUE if the argument is a NOT AVAILABLE condition, false if it is available. This is a good way of making calculations conditional on the availability of data:

@IF{@ISNA(A3),@NA,A3*B5}

Some fairly complicated worksheets can be developed using these advanced features.

Memory Considerations

The particular spreadsheet that we use is a Flex-based

system called *Dynacalc*. Since that is the system that I am most familiar with, I will describe some of the working techniques of that system, assuming that all work-sheet programs must use an overall somewhat similar system, while perhaps differing on some of the fine points.

This program allows 256 columns and 256 rows, not both at once, as it would require 128K bytes just to address all of the cells. A cell table is set up with a two-byte address for each cell in use (sometimes not in use, as we shall see). The cell table can hold 7680 entries, which means that you can address to cell AD256, for a tall worksheet with many rows, or to cell IV30, for a long worksheet with many columns, or any combination in-between, as long as the total figure $ROW \cdot COL$ doesn't exceed 7680.

Each entry in the cell table requires a two byte address. If you GOTO cell AD256 and enter a single character, you will have consumed 15360 bytes for cell addresses and one byte for the label. The program allocates all cells horizontally and vertically up to the largest address in use. However, it doesn't subtract cells from the table ever. If you have overflowed memory and deleted several rows, you won't get the full benefit of extra memory until you /S SAVE the file and /S LOAD the file back into the system after /Clearing the workspace. When the file is read back into memory, the unused rows and/or columns will not be allocated in the cell table with the resultant saving in memory.

Each value uses 10 bytes of memory, even "0". A cell reference in another cell also uses 10 bytes. Placing a B1 in cell A2 uses 10 bytes of memory. Labels use only one byte per character. Therefore, if you have a numerical sequence of labels "1", "2", "3" ..., it is much more memory efficient to enter them with a leading ' (single quote) to assure that the worksheet considers them to be a label.

A calculation (@SUM{A1...etc.}) starts at 10 bytes and consumes additional memory depending upon how long the calculation is. Therefore, if you are running out of room, it will save space to put an often used calculation in one cell, and reference it from other cells. If you are really desperate for a few extra bytes, replacing a formula by its value will also save space, at the expense of recalculation time, if any of the values in the formula change. You would have to re-enter the formula to recalculate the results (or do it by hand).

Visual display

Stop me if you've heard this one before — you really need 80 columns to be able to see a reasonable portion of the worksheet. Some of the new video boards (for Apple anyway) allow a display of 132 columns on-screen. The more you can see, the easier and faster it is to work with the program. The less scrolling that you have to do, the better. I use the GOTO *cell* command a lot because it is much faster than scrolling row by row or column by column to the desired site. I often add 20 to the desired cell number so that the cell is located in the upper portion of the screen when I get there.

When in the formula dump mode (formulae displayed on the screen instead of values), the formula is only printed to the width of the column. Often, this is not wide enough to see the whole formula on the screen, or printer. To enable printing of the whole formula, it is necessary to widen the columns containing the formulae somewhat. This is only necessary for dumping the formulae to a

printer. I often put the printer into compressed mode, to get the greatest number of columns on the paper at once. With a 15 inch carriage, you can print about 230 characters across.

I don't know how I functioned B.S. [that's before spreadsheets]. I would recommend just about anyone who

owns a computer to try out **MICROCalc** (elsewhere in this issue), and if you really need the power and memory of a full-size spreadsheet, buy one of the many software packages available. A list of the spreadsheets available for the computers we normally cover is listed at the end of this article. Happy calculating!

[A	[[B [[C	[[D	E	[[F]	
3-Dealer	A/C#	Totals	WWA	M/A	BOM			
4-								
5-Abacus North	99501A	@SUM(D5...F5)	75+150	225 30	30 12+9		21	
6-A.P.P.L.E.	98032A	@SUM(D6...F6)	360+314+314+157	1145 187+187+187+2995	3556 54+54+5		113	
7-Brodart Staceys	17705A	@SUM(D7...F7)	1990+4990	6980 86+135	221 18		18	
8-Clinton Computer	20735A	@SUM(D8...F8)	4809	4809 141	141 77		77	
9-Computer Shoppe	70002A	@SUM(D9...F9)	94	94 87+23+54	164 46+65		111	
10-Computer Store	74105A	@SUM(D10...F10)	63+157	220 35+144	179 122+65		187	
11-Comp. Market HI	96813A	@SUM(D11...F11)	1286	1286 31+31+31+76	169 67+54+90		211	
12-Data Bank Fremont	94536A	@SUM(D12...F12)	360+210	570 520	520 79+52+9		140	
13-Data Base	46805A	@SUM(D13...F13)	94+94+38	226 16+31	47 56+98		154	
14-Data Domain	60195A	@SUM(D14...F14)	345+69	414 49+65+98+123	335 56		56	
15-Esd Labortory	JAP-01	@SUM(D15...F15)	188+100+94	382 432	432 29+87		116	
16-Farnsworth Comp.	60505A	@SUM(D16...F16)	361	361 86+54+67+32	239 87		87	
17-Intergrated DP	CAN-02	@SUM(D17...F17)	144+144	288 235	235 234+76+123		433	
18-Kroch's&Brentanos	60603D	@SUM(D18...F18)	157	157 72+72+79	223 76+78+98		252	
19-Malibu Microcomp	90265A	@SUM(D19...F19)	144+58	202 144+187+100+125+115+300	15+65+90		170	
20-Micro Chip	48084C	@SUM(D20...F20)	94+94+20	208 87+45+987	1119 21		21	
21-Micro Computer	45459A	@SUM(D21...F21)	188+188+188+176	740 16+87	103 76+29+7		112	
22-Micron Dist.	CAN-21	@SUM(D22...F22)	720	720 1180+100+100+100+240	72+32+80		184	
23-Opamp Tech.Books	90038A	@SUM(D23...F23)	207+157	364 87+87+87	261 28+35		63	
24-Pandasoft	GER-04	@SUM(D24...F24)	188	188 500+374+624+624+624+2746	78+54		132	
25-Software Masters	60204D	@SUM(D25...F25)	157	157 249+249+250+250+250+1248	25		25	
26-Software Store	33612B	@SUM(D26...F26)	62+157+62+157	438 129+40	169 76+36		112	
27-Telecom Library	10011B	@SUM(D27...F27)	235	235 (115.2+186.75+72)*3	1122 45+65		110	
28-Timecore	02114A	@SUM(D28...F28)	188+188+188	564 113	113 34+24+98+485			
29-World Wide Media	10016D	@SUM(D29...F29)	235	235 4066+10+20+150+6000+500	70+6+3+875+105			
30-								
31-TOTALS		@SUM(C4...C30)	@SUM(D4...D30)	21208	@SUM(E4...E30)	26809	@SUM(F4...F30)	

Figure 4. A sample worksheet with formula dump on. An overlay of some of the values is superimposed.

SANYO MONITOR SALE!!



9" Data Monitor

- 80 Columns x 24 lines
- Green text display
- Easy to read - no eye strain
- Up front brightness control
- High resolution graphics
- Quick start - no preheating
- Regulated power supply
- Attractive metal cabinet
- UL and FCC approved


- **15 Day Free Trial - 90 Day Immediate Replacement Warranty**

9" Screen - Green Text Display	\$ 79.00
12" Screen - Green Text Display (anti-reflective screen)	\$ 99.00
12" Screen - Amber Text Display (anti-reflective screen)	\$119.00
14" Screen - Color Monitor (national brand)	\$249.00

Display Monitors From Sanyo

With the need for computing power growing every day, Sanyo has stepped in to meet the demand with a whole new line of low cost, high quality data monitors. Designed for commercial and personal computer use. All models come with an array of features, including up-front brightness and contrast controls. The capacity 5 x 7 dot characters as the input is 24 lines of characters with up to 80 characters per line.

Equally important, all are built with Sanyo's commitment to technological excellence. In the world of Audio/Video, Sanyo is synonymous with reliability and performance. And Sanyo quality is reflected in our reputation. Unlike some suppliers, Sanyo designs, manufactures and tests virtually all the parts that go into our products, from cameras to stereos. That's an assurance not everybody can give you!

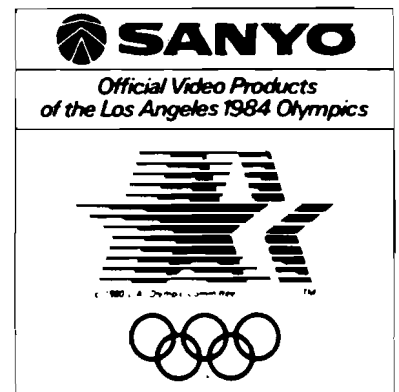


**• LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
• BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • OVER 500 PROGRAMS • FREE CATALOGS**

Add \$10.00 for shipping, handling and insurance. Illinois residents please add 6% tax. Add \$20.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail!! Canada orders must be in U.S. dollars. Visa - MasterCard - C.O.D.

PROTECTO
ENTERPRISES (WE LOVE OUR CUSTOMERS)
 BOX 550, BARRINGTON, ILLINOIS 60010
 Phone 312/382-5244 to order

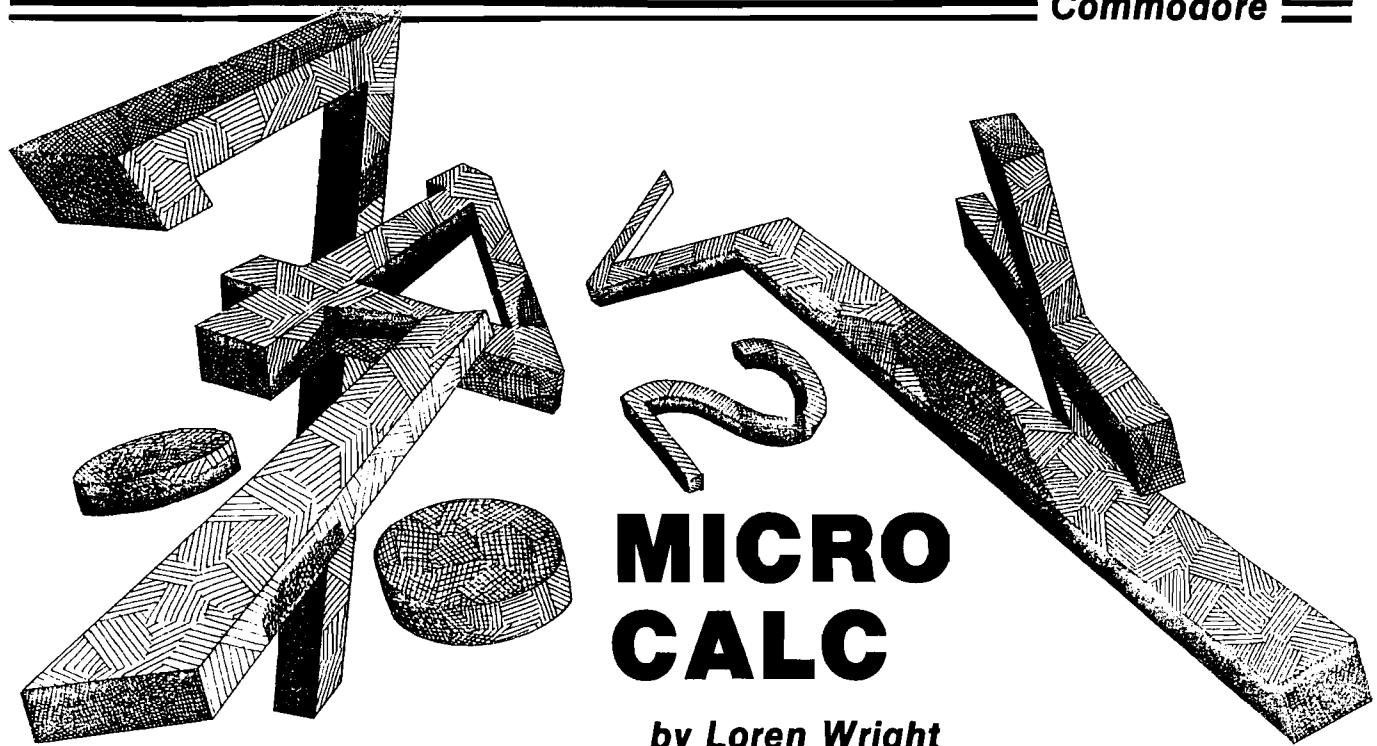

MICRO CALC

by Loren Wright

Typing in the Listing

For all Commodore computers you will be typing in all or part of listing 1, the version for the Commodore 64. If you are using a PET or a VIC-20, you should skip the lines marked. There are different versions of these lines in listing 2 (for the VIC-20) and listing 3 for the PET. The features for the PET and Commodore 64 versions are the same:

- ✓ 20 working lines
- ✓ 20 corresponding comment fields
- ✓ support of disk or tape files
- ✓ optional zeroing of user variables
- ✓ multiple statement support
- ✓ display of disk file name

The VIC-20 version has the following features

- ✓ 10 working lines
- ✓ support of tape files
- ✓ optional zeroing of user variables
- ✓ multiple statement support

Operating Instructions

Commodore 64

F7 performs calculation
 F8 zeros user variables
 left arrow enters file mode
 British pound enters comment field

VIC-20

The VIC-20 version operates the same as the Commodore 64 version, except there is no comment field, so the British pound key has no function.

See the comments in the main arti-

cle (page 11) for hints on how to get more onto the VIC's smaller screen. Predefined constants and functions will be particularly useful.

PET

Since the PET has no function keys, these have been replaced:

@ performs calculation
 | zeros user variables
 left arrow enters file mode
 backslash enters comment field

Using the Internal Timer

Commodore computers have a special variable TI, which increments once every 1/60 second. You can use this timer on a Micro Calc screen to compare the speed of BASIC functions. Following is a screen that demonstrates how to do this:

```
A = 5.3507
T = TI
B = A ↑ 2
U = TI - T
U?
T = TI
B = A * A
U = TI - T
U?
```

You may be surprised by the results of this comparison between using exponentiation and simple multiplication to square a number. Other comparisons you may wish to try are:

using a number vs. a variable in a calculation

the SQR() function vs. raising to the .5 power
 SIN() vs. COS()

How to Use the RND() Function

The RND() function on Commodore computers is actually a *pseudo*-random number generator. This is because each successive random number depends to some extent on the previous number. On VIC, C-64, and later PET models, the random number generator works as follows:

A *negative* argument reseeds the random number generator with a number calculated from the argument. If you use the same argument each time, you will generate the same sequence of random numbers. Use a negative argument only once to start a sequence. Then follow with positive arguments.

A *positive* argument will generate a new number in the sequence, without reseeding the generator.

A *zero* argument yields a random number that is not based on the seed.

To get the most closely random sequence, you should either use RND(0), or start by performing RND(-TI) and then follow with RND() using a positive argument.

To get random integers the following calculation should be used:

```
R = 10
N = INT[R * RND(0) + 1]
```

This gives random numbers N from 1 to R. If you leave the +1 out, you'll get numbers in the range 0 to R-1.

Comments on Commodore listings

Starting this month, our Commodore listings are being output on the EPSON FX-80 printer. This printer allows redefining some or all of the Epson ROM character set. After much testing, we arrived at a compromise set of characters. Since many of the reversed characters would be difficult to read at the size of these listings, we thought that it would be clearer for the reader typing these programs into his computer to underline the reversed characters. The Commodore programs that follow utilize this new style of listing. If anyone has any comments, pro or con, drop us a line with your viewpoint.

Listing 1 Commodore 64

```

10 PRINT"█":POKE53281,0:POKE53280,0:
  GOSUB8000
20 Q$=CHR$(34):CR$=CHR$(13):
  DL$=CHR$(20):RB$="R_█"
25 BL$="-----":
  DI$="█+█":CC$="█"
30 NL=20:DIMC$(NL),S$(NL),S(NL)
40 LL=1:GOSUB8490:PRINT"SQ";:GOTO110
100 LL=1:GOSUB8500:PRINT"SQ";:
  GOSUB9000
110 S$=S$(LL):
  IFRIGHT$(S$,1)
  ="?"THENPRINT"R"BL$CR$:"TAB(10);
115 PRINTTAB(10)"█"S$DI$;
120 GOSUB2000
130 IFT$="█"THEN300
135 IFT$="█"THENGOSUB9000:LL=1:
  PRINT"SQ";:GOTO110
140 IFT$="█"THEN100
150 IFT$=CR$ORT$="Q"THEN210
160 IFT$=":"THEN270
170 IFT$=DL$THEN240
180 IFT$="_"THENS$(LL)=S$:GOSUB5000:
  GOSUB9000:LL=1:GOTO110
185 IFT$="ε"THENPRINT"R_█":S$(LL)=S$:
  GOTO1000
200 IFLEN(S$)<27THENS$=S$+T$:
  PRINTT$DI$;:GOTO120
210 S$(LL)=S$
220 LL=LL+1:IFLL=NL+1THENLL=1:
  PRINTRB$;:PRINT"SQ"TAB(10);:
  GOTO110
230 PRINTRB$CR$TAB(10);:GOTO110
240 IFS$=""THEN120
250 PRINTRB$"███"DI$;
260 S$=LEFT$(S$,LEN(S$)-1):GOTO120
270 S$(LL)=S$:LL=LL-1

```

```

275 IFLL=0THENLL=NL:
  PRINTRB$"S111111111111
  QQQQQQQQQQQQQQQQQQQ";:GOTO110
280 PRINTRB$CR$":::"TAB(10);:GOTO110
300 PRINTRB$:S$(LL)=S$:GOSUB3000:
  GOSUB7000:PRINT"SQ"TAB(10);:LL=1:
  GOTO110
1000 PRINT"SQ█";:LL=1
1010 C$=C$(LL):PRINTC$CC$;
1020 GOSUB4500
1030 IFT$="ε"THENPRINT"SQ";:
  C$(LL)=C$:LL=1:GOTO110
1040 IFT$=CR$ORT$="Q"THEN1100
1050 IFT$=":"THEN1200
1060 IFT$=DL$THEN1300
1065 IFASC(T$)<32ORASC(T$)
  >127THEN1020
1080 IFLEN(C$)<9THENC$=C$+T$:
  PRINTT$CC$;:GOTO1020
1100 C$(LL)=C$
1110 LL=LL+1:IFLL=NL+1THENLL=1:
  PRINT"███SQ";:GOTO1010
1120 PRINT"███"CR$;:GOTO1010
1200 C$(LL)=C$
1210 LL=LL-1:IFLL=0THENLL=NL:PRINT
  "SQQQQQQQQQQQQQQQQQQQ";:
  GOTO1010
1220 PRINT"███"CR$":::";:GOTO1010
1300 IFC$=""THEN1020
1310 PRINT"███"CC$;
1320 C$=LEFT$(C$,LEN(C$)-1):GOTO1020
2000 GOSUB4500
2010 IFT$="█"ORT$=CR$ORT$="Q"ORT$=":"0
  RT$="OR
  T$=DL$ORT$="█"ORT$="ε"THENRETURN
2015 IFT$="█"THENRETURN
2020 IFT$>","ANDT$<":"THEN2070
2030 IFT$>":":ANDT$<["THEN2070
2040 IFT$>'"ANDT$<","THEN2070
2050 IFT$="^"THEN2070
2060 GOTO2000
2070 RETURN
3000 PRINT"█CALCULATING"
3005 FORJJ=1TONL:
  IFRIGHT$(S$(JJ),1)
  ="?"THENGOSUB6500:GOTO3030
3010 IFLEN(S$(JJ))<3THEN3030
3020 A$=S$(JJ):GOSUB4000
3030 NEXT:PRINT"█":RETURN
4000 II=0:KK=II
4010 II=II+1:KK=KK+1:
  IFII>LEN(A$)THENGOSUB4100:RETURN
4020 XX=ASC(MID$(A$,II,1)):
  IFXX=59THENGOSUB4100:GOTO4010
4030 IFXX=33THENGOSUB4100:RETURN
4040 POKE511+KK,XX:GOTO4010
4100 POKE511+KK,0:KK=0:SYS828:RETURN
4500 GETT$:IFT$=""THEN4500
4510 RETURN
5000 PRINT"█RL█DAD OR RS█AVE"
5010 GOSUB4500
5020 IFT$="L"THENSA=0:FD$="S,R":

```

```

GOTO5045
5030 IFT$="S"THENSA=1:FD$=" ,S,W":
GOTO5045
5040 GOTO5010
5045 PRINT"QRD DISK OR RTAPE":
GOSUB4500
5046 IFNOT((T$="D")OR(T$="T"))
THEN5045
5048 INPUT"QQNAME";NA$
5050 IFT$="D"THENSA=SA+B:DV=B:NA$="@0:
"+NA$+FD$:OPEN1,8,15:GOTO5060
5055 DV=1:NA$=""
5060 OPEN1,DV,SA,NA$:
IFSAAND1THENGOSUB5090:GOSUB5200:
GOTO5080
5070 GOSUB5110:GOSUB5300
5080 CLOSE1:CLOSE15:GOSUB8000:
GOSUB8510:PRINT"SQ";:RETURN
5090 A$="":FORII=1TONL:S$=S$(II):
IFS$=""THENS$=" "
5100 A$=A$+S$+CR$:NEXT:PRINT#1,A$:
DE=0:GOSUB5900:RETURN
5110 FORII=1TONL:INPUT#1,A$:DE=0:
GOSUB5900:IFDETHENII=NL:NEXT:
RETURN
5115 IFA$=" "THENA$=""
5120 S$(II)=A$:NEXT:RETURN
5200 IFDETHENRETURN
5205 A$="":FORII=1TONL:S$=C$(II):
IFS$=""THENS$=" "
5210 A$=A$+S$+CR$:NEXT:PRINT#1,A$:
DE=0:GOSUB5900:RETURN
5300 IFDETHENRETURN
5310 FORII=1TONL:DE=0:INPUT#1,A$:
GOSUB5900:IFDETHENII=NL:NEXT:
GOTO5340
5320 IFA$=" "THENA$=""
5330 C$(II)=A$:NEXT
5340 RETURN
5900 IFDV=1THENRETURN
5910 INPUT#15,D1$,D2$,D3$,D4$:
IFVAL(D1$)=0THENRETURN
5920 PRINT"C"D1$" "D2$" "D3$" "D4$"
5930 FORJJ=1TO2000:NEXT
5940 DE=-1:RETURN
6500 BB=ASC(LEFT$(S$(JJ),1))-64:
IFBB>13THENBB=BB-13:GOTO6530
6510 ONBBGOSUB6560,6570,6580,6590,
6600,6610,6620,6630,6640,6650,
6660,6670,6680
6520 GOTO6540
6530 ONBBGOSUB6690,6700,6710,6720,
6730,6740,6750,6760,6770,6780,
6790,6800,6810
6540 S(JJ)=XX
6550 RETURN
6560 XX=A:RETURN
6570 XX=B:RETURN
6580 XX=C:RETURN
6590 XX=D:RETURN
6600 XX=E:RETURN
6610 XX=F:RETURN

```

I

```

6620 XX=G:RETURN
6630 XX=H:RETURN
6640 XX=I:RETURN
6650 XX=J:RETURN
6660 XX=K:RETURN
6670 XX=L:RETURN
6680 XX=M:RETURN
6690 XX=N:RETURN
6700 XX=O:RETURN
6710 XX=P:RETURN
6720 XX=Q:RETURN
6730 XX=R:RETURN
6740 XX=S:RETURN
6750 XX=T:RETURN
6760 XX=U:RETURN
6770 XX=V:RETURN
6780 XX=W:RETURN
6790 XX=X:RETURN
6800 XX=Y:RETURN
6810 XX=Z:RETURN
7000 PRINT"SQ";:FORII=1TONL:S$=S$(II):
SS=S(II)
7010 X$="":
IFRIGHT$(S$,1)="?"THENX$=STR$(SS)
+"R"+LEFT$(BL$,24-LEN(STR$(SS)))
7020 PRINTTAB(10)S$X$:NEXT:RETURN
8000 RESTORE:FORII=0TO42:READAA:
POKE828+II,AA:NEXT:RETURN
8490 FORII=1TONL:READS$(II):S(II)=0:
NEXT
8495 FORII=1TONL:READC$(II):NEXT:
GOTO8510
8500 FORII=1TONL:C$(II)=""S$(II)=""S(II)=0:NEXT
8510 PRINT"CQ";:FORII=1TONL:S$=S$(II):
C$=C$(II)
8520 PRINT"C$LEFT$(BL$,10-LEN(C$))
"R$LEFT$(BL$,28-LEN(S$))
8530 NEXT:
PRINT"Q" MID$(NA$,4) " "":
RETURN
9000 PRINT"SCLEAR"
9010 A=0:B=A:C=A:D=A:E=A:F=A:G=A:H=A:
I=A:J=A:K=A:L=A:M=A
9020 N=A:O=A:P=A:Q=A:R=A:S=A:T=A:U=A:
V=A:W=A:X=A:Y=A:Z=A
9030 PRINT"S "S":RETURN
9828 DATA165,122,141,112,3,165,123,
141,113,3,169,0,133,122,169,2,
133,123,32,121
9848 DATA165,169,0,133,122,169,2,133,
123,32,165,169,173,112,3,133,122,
173,113,3
9868 DATA133,123,96
9900 DATAA=8000,M=48,I=11.9,I=I/1200,
D=(1-(1+I)^-M)/I
9910 DATAP=A/D,P=INT(P*100+.5)
/100,P?,
9915 DATA,,,,,,
9920 DATAPRINCIPAL,MONTHS,INTEREST,,
DIVISOR,,PAYMENT,,
9925 DATA,,,,,,

```

J

K

L

M

Comments on VIC and Pet listings

The C-64 listing is the complete MICROCalc listing. If you have a VIC, Expanded VIC or PET then the listings are not complete. For VIC and PET, you must use the C-64 listing from lines 4000-7999, an Expanded VIC has additional changes to the standard VIC program.

Listing 2 VIC-20

```

10 PRINT "C":POKE36879,8:GOSUB8000
20 CR$=CHR$(13):DL$=CHR$(20):
  RB$="R █":
  BL$="█":
  DI$="◆███"
30 NL=10:DIMS$(NL),S(NL)
40 LL=1:GOSUB8490:GOTO110
100 LL=1:GOSUB8500:GOSUB9000
110 S$=S$(LL):
  IFRIGHT$(S$,1)
  ="?"THENPRINT "R"BL$CR$":";
115 PRINTS$DI$;
120 GOSUB2000
125 IFT$="█"THENPRINTRB$:GOSUB9000:
  LL=1:PRINT "SQ";:GOTO110
130 IFT$="█"THENPRINTRB$:S$(LL)=S$:
  GOSUB3000:GOSUB7000:PRINT "SQ";:
  LL=1:GOTO110
140 IFT$="█"THEN100
150 IFT$=CR$ORT$="Q"THEN210
160 IFT$=":"THEN270
170 IFT$=DL$THEN240
180 IFT$=" "THENS$(LL)=S$:GOSUB5000:
  GOSUB9000:LL=1:GOTO110
190 S$=S$+T$
200 IFLEN(S$)<19THEN120
210 S$(LL)=S$
220 LL=LL+1:IFLL=NL+1THENLL=1:
  PRINTRB$"SQ";:GOTO110
230 PRINTRB$CR$CR$;:GOTO110
240 IFS$=" "THEN120
250 PRINTRB$"███"DI$;
260 S$=LEFT$(S$,LEN(S$)-1):GOTO120
270 S$(LL)=S$:LL=LL-1:IFLL=0THENLL=NL:
  PRINTRB$"SQSQSQSQSQSQSQSQSQSQSQSQSQSQSQ";:
  GOTO110
280 PRINTRB$CR$"XXX";:GOTO110
2000 GOSUB4500
2005 IFT$="█"THENRETURN
2010 IFT$="█"ORT$=CR$ORT$="Q"ORT$=":"O
  RT$=" "ORT$=DL$ORT$="█"THENRETURN
2020 IFT$>" "ANDT$<":THEN2070
2030 IFT$>:" "ANDT$<["THEN2070
2040 IFT$>" "ANDT$<,"THEN2070
2050 IFT$="^"THEN2070
2060 GOTO2000
2070 PRINTT$DI$;:RETURN
3000 FORJJ=1TONL:

```

```

IFRIGHT$(S$(JJ),1)
  ="?"THEN60SUB6500:GOTO3030
3010 IFLEN(S$(JJ))<3THEN3030
3020 A$=S$(JJ):60SUB4000
3030 NEXT:RETURN
5100 XX=FRE(0):A$=A$+S$+CR$:NEXT:
  PRINT#1,A$:RETURN
8000 RESTORE:FORII=0TO42:READAA:
  POKE828+II,AA:NEXT:RETURN
8490 FORII=1TONL:READS$(II):S(II)=0:
  NEXT:GOTO8510
8500 FORII=1TONL:S$(II)="":S(II)=0:
  NEXT
8510 PRINT "C";:FORII=1TONL:S$=S$(II)
8520 PRINT "Q"█S$R"LEFT$(BL$,
  20-LEN(S$)):NEXT:PRINT "SQ";:
  RETURN
9000 PRINT "S"█CLEAR█":A=0:B=A:C=A:D=A:
  E=A:F=A:G=A:H=A:I=A:J=A:K=A:L=A:
  M=A
9010 N=A:O=A:P=A:Q=A:R=A:S=A:T=A:U=A:
  V=A:W=A:X=A:Y=A:Z=A:
  PRINT "S "":RETURN
9828 DATA165,122,141,112,3,165,123,
  141,113,3,169,0,133,122,169,2,
  133,123,32,121
9848 DATA197,169,0,133,122,169,2,133,
  123,32,165,201,173,112,3,133,122,
  173,113,3
9868 DATA133,123,96
9900 DATAA=8000,M=48,I=11.9,I=I/1200,
  D=(1-(1+I)^-M)/I
9910 DATAP=A/D,P=INT(P*100+.5)
  /100,P?,,

```

Listing 3 Expanded VIC-20

Change These Lines to get the Improved Expanded VIC Version

```

130 IFT$="█"THENPRINTRB$:S$(LL)=S$:
  GOSUB3000:GOSUB7000:PRINT "SQ";:
  LL=1:GOTO110
135 IFT$="█"THENGOSUB9000:PRINT "SQ";:
  LL=1:GOTO110
180 IFT$=" "THENS$(LL)=S$:GOSUB5000:
  LL=1:GOTO110
230 PRINTRB$CR$;:GOTO110
280 PRINTRB$CR$"XXX";:GOTO110
2005 IFT$="@ "THEN2005
2015 IFT$="█"THENRETURN
3000 PRINT "S"█CALCULATING":FORJJ=1TONL:
  IFRIGHT$(S$(JJ),1)="?"THEN
  GOSUB6500:GOTO3030
3030 NEXT:PRINT "S "█":RETURN
8510 PRINT "CQ";:FORII=1TONL:S$=S$(II)
8520 PRINT "Q"█S$R"LEFT$(BL$,
  20-LEN(S$)):NEXT
8530 PRINT "Q"█MID$(NA$,4)"███████"█S":
  RETURN
9920 DATA,,,,,,

```

Listing 4 PET

```

10 PRINT "C":GOSUB8000
20 Q$=CHR$(34):CR$=CHR$(13):
  DL$=CHR$(20):RB$="R_■"
25 BL$="-----":
  DI$="◆■||":CC$="●||"
30 NL=20:DIMC$(NL),S$(NL),S(NL)
35 GOTO100
40 LL=1:GOSUB8490:PRINT"SQ";:GOTO110
100 LL=1:GOSUB8500:PRINT"SQ";:
  GOSUB9000
110 S$=S$(LL):
  IFRIGHT$(S$,1)
  ="?"THENPRINT"R"BL$CR$:"TAB(10);
115 PRINTTAB(10)S$DI$;
120 GOSUB2000
130 IFT$="@ THEN300
135 IFT$="[ THENGOSUB9000:LL=1:
  PRINT"SQ";:GOTO110
140 IFT$="□ THEN100
150 IFT$=CR$ORT$="Q THEN210
160 IFT$=":" THEN270
170 IFT$=DL$ THEN240
180 IFT$="_" THENS$(LL)=S$:GOSUB5000:
  GOSUB9000:LL=1:GOTO110
185 IFT$="ε" THENPRINT"R_■":S$(LL)=S$:
  GOTO1000
200 IFLEN(S$)<27THENS$=S$+T$:
  PRINTT$DI$;:GOTO120
210 S$(LL)=S$
220 LL=LL+1:IFLL=NL+1THENLL=1:
  PRINTRB$;:PRINT"SQ"TAB(10);:
  GOTO110
230 PRINTRB$CR$TAB(10);:GOTO110
240 IFS$=" THEN120
250 PRINTRB$"||||"DI$;
260 S$=LEFT$(S$,LEN(S$)-1):GOTO120
270 S$(LL)=S$:LL=LL-1
275 PRINTRB$"S1111111111Q000000000
  Q000000000";:GOTO110
280 PRINTRB$CR$:"TAB(10);:GOTO110
300 PRINTRB$:S$(LL)=S$:GOSUB3000:
  GOSUB7000:PRINT"SQ"TAB(10);:LL=1:
  GOTO110
1000 PRINT"SQ||":LL=1
1010 C$=C$(LL):PRINTC$CC$;
1020 GOSUB4500
1030 IFT$="ε" THENPRINT"SQ";:
  C$(LL)=C$:LL=1:GOTO110
1040 IFT$=CR$ORT$="Q THEN1100
1050 IFT$=":" THEN1200
1060 IFT$=DL$ THEN1300
1065 IFASC(T$)<32ORASC(T$)
  >127THEN1020
1080 IFLEN(C$)<9THENC$=C$+T$:
  PRINTT$CC$;:GOTO1020
1100 C$(LL)=C$
1110 LL=LL+1:IFLL=NL+1THENLL=1:
  PRINT"||SQ";:GOTO1010
1120 PRINT"||"CR$;:GOTO1010
1200 C$(LL)=C$
1210 LL=LL-1:IFLL=0THENLL=NL:
  PRINT"SQ00000000000000000000";:
  GOTO1010
1220 PRINT"||"CR$:"TAB(10);:GOTO1010
1300 IFC$=" THEN1020
1310 PRINT"||||"CC$;
1320 C$=LEFT$(C$,LEN(C$)-1):GOTO1020
2000 GOSUB4500
2010 IFT$="@ ORT$=CR$ORT$="Q ORT$=":" OR
  T$="_" ORT$=DL$ ORT$="□ ORT$="ε" THE
  NRETURN
2015 IFT$="[ THENRETURN
2020 IFT$>"," ANDT$<":" THEN2070
2030 IFT$>":" ANDT$<[" THEN2070
2040 IFT$>' ' ANDT$<"," THEN2070
2050 IFT$="^" THEN2070
2060 GOTO2000
2070 RETURN
3000 PRINT"SRCALCULATING"
3005 FORJJ=1TONL:
  IFRIGHT$(S$(JJ),1)
  ="?" THENGOSUB6500:GOTO3030
3010 IFLEN(S$(JJ))<3 THEN3030
3020 A$=S$(JJ):GOSUB4000
3030 NEXT:PRINT"S "":RETURN
8000 RESTORE:FORII=0TO42:READAA:
  POKE828+II,AA:NEXT:RETURN
8490 FORII=1TONL:READS$(II):S(II)=0:
  NEXT
8495 FORII=1TONL:READC$(II):NEXT:
  GOTO8510
8500 FORII=1TONL:C$(II)="":S$(II)="":
  S(II)=0:NEXT
8510 PRINT"□Q";:FORII=1TONL:S$=S$(II):
  C$=C$(II)
8520 PRINTC$LEFT$(BL$,10-LEN(C$))
  S$R"LEFT$(BL$,28-LEN(S$))
8530 NEXT:
  PRINT"Q" MID$(NA$,4)"||||| "":
  RETURN
9000 PRINT"SRCLEAR"
9010 A=0:B=A:C=A:D=A:E=A:F=A:G=A:H=A:
  I=A:J=A:K=A:L=A:M=A
9020 N=A:O=A:P=A:Q=A:R=A:S=A:T=A:U=A:
  V=A:W=A:X=A:Y=A:Z=A
9030 PRINT"S "S":RETURN
9828 DATA165,119,141,112,3,165,120,
  141,113,3,169,0,133,119,169,2,
  133,120,32,251
9848 DATA180,169,0,133,119,169,2,133,
  120,32,48,185,173,112,3,133,119,
  173,113,3
9868 DATA133,120,96
9900 DATAA=8000,M=48,I=11.9,I=I/1200,
  D=(1-(1+I)^-M)/I
9910 DATAP=A/D,P=INT(P*100+.5)
  /100,P?,
9915 DATA,,,,,,
9920 DATAPRINCIPAL,MONTHS,INTEREST,,
  DIVISOR,,PAYMENT,,
9925 DATA,,,,,,

```


PUT PRICES IN CHECK

<p>CARTRIDGE RIBBONS FOR APPLE PRINTERS NEC 8023A C. ITOH PROWRITER</p> <p>\$9.95 EA. \$107.46 DOZ.</p>	<p>CARTRIDGE RIBBONS FOR EPSON MX-80 MX-100</p> <p>\$6.99 EA \$11.95 EA \$86.29 EA \$129.06 DOZ</p>	<p>MAXELL DISKETTES 5 1/4" SINGLE SIDE DUAL DENSITY MD-1</p> <p>\$29.90 10 PACK</p>
<p>INNOVATIVE CONCEPTS FLIP'N'FILE DISC STORAGE BOX HOLDS UP TO 60 DISKETTES</p> <p>5 1/4" 8"</p> <p>\$24.95 EA \$29.95 EA</p>	<p>RIBBONS FOR IDS PRINTERS</p> <p>EA DOZ.</p> <p>440 \$2.77 \$29.92 PAPER TIGER \$6.95 \$75.06 MICROPRISM \$7.99 \$86.29 PRISM 10.95 118.25</p>	<p>DISKETTE STORAGE BOXES 5 1/4" — BLUE OR BEIGE</p> <p>\$2.49 EA.</p>
<p>DUAL SPOOL RIBBONS FOR OKIDATA PRINTERS</p> <p>80, 82, 83 EA DOZ 92, 93 \$2.77 \$29.92 84 \$5.99 \$64.69</p>	<p>MEMOREX DISKETTES 5 1/4" SINGLE SIDE - DUAL DENSITY</p> <p>\$24.99 10 PACK</p>	<p>COLOR- CODER LIBRARY CASE SET CONTAINS 5 BRIGHT COLORS</p> <p>5 1/4" 8"</p> <p>\$19.95 SET OF 5 \$23.95 SET OF 8</p>
<p>ANTI-STATIC SPRAY FULL QUART SIZE WITH DISPENSER</p> <p>\$6.95 QT. 1 GALLON REFILL \$19.95</p>	<p>CARTRIDGE RIBBONS FOR COMREX DAISYWRITER 2000</p> <p>\$2.49 EA \$26.89 DOZ</p>	<p>LABEL SPECIAL</p> <p>\$2.99 / K (5K MIN)</p> <p>1 ACROSS 3 x 15/16 CONTINUOUS LABELS</p>

MOST RIBBONS AVAILABLE IN COLORS TOO!
CALL OR WRITE FOR OUR SUPPLIES CATALOGUE
ON ORDERS UNDER \$14.00 PLEASE ADD \$3.00 FOR SHIPPING
MINIMUM RIBBON ORDER \$30.00 OR 1 DOZEN



Check-Mate™

TOLL FREE 800-343-7706
IN MASS 617-963-7694
PHONES OPEN 9AM-7PM EASTERN TIME

51 DIAUTO DR. P.O. BOX 103
RANDOLPH, MA 02368

MASS RESIDENTS
ADD 5% SALES TAX

C-64

CIA

ALARM

CLOCK

8:30:58.9

By IAN ADAM

This article shows how to use the extremely accurate time-of-day clock built into the Commodore 64's CIA chip. The demonstration includes an alarm clock that runs independently of most other programs and I/O function.

The Commodore 64 does an acceptable job of keeping time with its TI\$ clock. All you have to do is set TI\$ to the current time, and it will run as long as the computer remains on. You can use the C-64 for just about anything else and just type ?TI\$ when you want the time.

However, there are several limitations on use of the built-in time function. First of all, it is not very convenient to use while a program is running. You have to STOP the program, carefully ask the time (no syntax error, or else...), then CONTINUE with the program. Second, the TI\$ function is not very accurate. A recent sample of a half dozen computers gave a typical error of 2.2%. That's over one minute per hour, or 32 minutes per day! Good enough to keep track of whether it's light or dark outside, perhaps, but not adequate to launch the space shuttle. The TI\$ clock also stops, running when a file or program is being loaded or saved. And third, of course, it's only there when you ask, and we all know how easy that is to forget!

But despair not; a ready solution is at hand. In fact, your 64 contains not one, but three clocks [count 'em!]. The additional timepieces are contained in the two 6526 Complex Interface Adapter chips (CIA's), and they offer some considerable advantages. These two chips are provided by Commodore for the purpose of carrying out a multitude of housekeeping functions, such as generating interrupts, reading the keyboard and joysticks, external communications, etc. The two clocks are a bonus. And very accurate, too ...

they include tenths of seconds, and appear to be that accurate over the course of a day. They also keep running during input/output operations, in fact anytime the computer is turned on. With two clocks, you could keep track of the time in Mandalay, if you want, and there are even programmable alarms so you won't miss dinner there either!

Using the Program

Type in the listing as shown; type the DATA statements carefully, since they contain the machine language program. Any error in that portion can crash the computer.

When you've finished typing, SAVE a copy of the program before you run it. This will avoid having to retype the whole thing in the event of a fatal typographical error. Then go ahead and RUN it. First, the program will READ the machine language DATA and store it in memory. The variable CH is a checksum to guard against errors in the data. If the program stops and indicates a data error, then double-check everything. Assuming that is ok, the program will then ask you to enter the correct time. Give the AM/PM and the hour; when asked for the minute, check an accurate time source, and type in the number of the next minute [e.g. if it's 8:30, type in 31], then wait until that minute arrives to press "RETURN". Pressing return starts the clock.

After the instructions, you will be prompted for the time you want the alarm to be set to. When the alarm time

matches the clock time, it will be announced by:

- the border of the screen flashing;
- a buzzing sound; and,
- the word "ALARM" flashing above the time.

If that isn't enough to attract your attention, then perhaps you're in a time warp! In any event, you can turn off this display simply by pressing the "F1" key.

When properly loaded, the program will run just like clockwork. It will supply you with the instructions, but for your reference I'll repeat them here:

- SYS 832: (equals) 0 to 15; recall time display to screen;
- SYS 994: turn off time display (still runs internally);
- POKE 982,n: change color, where n (equals) 0 to 15;
- GOSUB 9140: set or reset alarm time;
- F1: stop alarm display.

As before, the operating part of the program is in subroutine form, so you can include it in other programs as you wish. The commands listed above can also be used within a program, once the time is correctly set. To stop the alarm display under program control, just use POKE 197,4.

If the F1 key is not convenient for stopping the alarm, for example if your program uses it for some other purpose, then it can be changed: it's the value that appears in memory location 197

when the key is pressed.

The main program is stored in the cassette buffer, while the alarm portion occupies an unused area of page 2 memory as well. Thus, they may conflict with other programs that use these areas for machine language or sprites. The program would also be destroyed by any tape load or save activities. If these cautions create a problem, then the routine should be relocated to a different area of memory. This is a straightforward task, but does require a basic knowledge of machine language. For those who want to study the machine code, an assembly listing is provided [listing 2].

Technical Details

The CIA clocks are a little more difficult to access than TI\$; with this program, however, it's as easy as apple pie. The time is contained in four registers for hours, minutes, seconds, and tenths [locations 56331 to 56328 for chip A, and 56587 to 56584 for chip B]. To avoid having the time flip over while reading the clock, all four registers are frozen whenever the hours register is read or written to. The clocks continue to keep good time while this is in progress. The last step in any access should be a read or write to the tenths-of-seconds register, to "unfreeze" the clock.

Each register stores its data in binary-coded decimal, or BCD, format. The hours register also contains an AM/PM indicator in bit 7. This would be an ideal format if the chip were running a display such as a digital alarm clock directly. For use in the computer, however, it does require some coding and decoding. This is a little awkward but not too difficult in BASIC, and even simpler in machine language. Once set, the clocks will automatically keep track of the time and AM/PM for as long as the machine is on, or until they are reset.

So how do we set the alarm? By exactly the same process as setting the time... by poking values into the same four registers! Only difference is, we first have to set bit 7 of the control register to a one. This signals to the chip that we want to set the alarm time instead of the clock time. The multiple use of these registers does keep things simple-honest! Lines 9160 and 9170 of the program take care of the BCD conversion. Line 9175 sets the control register to its normal value.

Once the alarm has been set, it cannot be read. When the prescribed time is reached, this is signalled by setting bit 2 of the interrupt register. The program must recognize this, and proceed

to alarm the operator in whatever way is specified. Don't worry, it won't bite. All of this may sound complicated, but the program takes care of the details.

These are the main registers involved:

Function	Chip A	Chip B
Hours & AM/PM	56331 (\$DC0B)	56587 (\$DD0B)
Minutes	56330 (\$DC0A)	56586 (\$DD0A)
Seconds	56329 (\$DC09)	56585 (\$DD09)
Tenths	56328 (\$DC08)	56584 (\$DD08)
Interrupt	56333 (\$DC0D)	56589 (\$DD0D)
Alarm Control	56336 (\$DC0F)	56591 (\$DD0F)

A Quirk In The Chip

Help; there's a quirk on the loose!

In programming the alarm, I came upon a most unusual feature. I got the alarm all set up, and (after a lot of hit-and-miss changes) finally got it to work well. Eureka. The only trouble was, the alarm would mysteriously sound for a second time, exactly one minute later. Really had me stumped for a while. After a sleepless night, however, it came to me what the problem was. Say the alarm is set for 8:30:00.0, and sounds at that time. One minute later, at precisely 8:30:59.9, the tenths-of-a-second register rolls over, giving an instantaneous time reading of 8:31:00.0, but it is apparently sufficient to trigger

a second alarm (sometimes!).

There are three or four ways to program around this quirk, once you know it exists. I decided the easiest way to solve the problem would be to POKE a 1 into the tenths register (i.e. setting the alarm time in our example to 8:30:00.1). This removes the alarm from the vicinity of the rollover, and seems to have banished the quirk to another world. If it should ever return to haunt you, please let me know; maybe we'll try an exorcist. **MICRO**

You may contact Ian Adam at 3706 West 20th Ave., Vancouver BC, V6S1E8 Canada.

Listing 1

```

0 REM ** TIME IS OF THE ESSENCE **
1 REM
2 REM ** CLOCK DISPLAY WITH ALARM **
3 REM   FOR COMMODORE 64
4 REM
5 REM   BY IAN ADAM
6 REM   VANCOUVER, B. C.
7 REM
10 GOSUB9000
20 PRINT"CQQ** TIME WAITS FOR NO MAN
   **Q
30 PRINT"CLOCK INSTRUCTIONS:Q"
40 PRINT"SYS 832:   TURN ON DISPLAY
50 PRINT"SYS 994:   TURN OFF DISPLAY
60 PRINT"POKE 982,N: CHANGE COLOUR
70 PRINT"GOSUB 9140: RESET ALARM
80 PRINT"F1:       TURN OFF ALARM
90 GOSUB9140:END:
   REM SET OR RESET ALARM
8990 REM BALANCE OF PROGRAM IS
   SUBROUTINES THAT CAN BE USED
   INDEPENDENTLY
9000 CH=0:FORI=832TO1008
9010 READA:POKEI,A:CH=CH+A:NEXT

```

(continued)

Commodore

Listing 1 (continued)

```

9015 FORI=679T0744:READA:POKEI,A:
      CH=CH+A:NEXT
9020 IFCH-23614THENPRINT"QWHO...DATA
      ERROR":STOP:NOTE CHECKSUM
9030 INPUT"QOOOQ IS IT AM OR PM";A$:
      INPUT"Q AND THE HOUR";H
9040 PRINT"QO ENTER THE MINUTE WHEN
      YOU WISH TO START
9050 PRINT" PRESS 'RETURN' TO START
      THE CLOCK:Q
9060 IFH>12THENA$="P":H=H-12:GOTO9060
9070 IFH>9THENH=H+6
      REM CONVERSION TO BCD
9080 ILEFT$(A$,1)="P"THENH=H+128
9090 C=56328:POKEC+3,H:POKEC+1,0
9100 INPUTM:M=M+INT(M/10)*6
9110 POKEC+2,M:POKEC,0:SYS832:
      PRINT"QO IF NOT OK,
      PRESS ANY KEY
9120 FORI=1T01000:
      IFPEEK(198)THENPOKE198,0:SYS994:
      GOTO9030
9130 NEXT:RETURN
9140 PRINT"QWHAT TIME WOULD YOU LIKE
      THE ALARM?Q"
9145 INPUT"AM OR PM";A$:
      A$=LEFT$(A$,1)
9150 INPUT"THE HOUR";H
9155 IFH>12THENA$="P":H=H-12:GOTO9155
9160 H=H-6*(H>9)-128*(A$="P"):
      REM CONVERT TO BCD AND ADD AM/PM
      INDICATOR
9165 INPUT"THE MINUTE";M
9170 M=M+INT(M/10)*6
9175 C=56328:POKEC+7,136:POKEC+3,H:
      POKEC+2,M:POKEC,1:POKEC+7,8:
      REM ALARM
9180 POKE54273,99:POKE54278,240:
      POKE54276,21
9185 POKE54287,2:POKE54290,17:
      REM SOUND
9190 RETURN
9200 DATA 120,173,20,3,162,89,234,234,
      234,142,20,3,173,21,3
9210 DATA 162,3,234,234,234,142,21,3,
      88,96,173,11,220,170,41
9220 DATA 15,24,105,48,141,67,4,138,
      16,4,162,16,16,2,162,1,142
9230 DATA 77,4,162,32,41,16,240,2,162,
      49,142,66,4,173,10,220
9240 DATA 170,41,15,105,48,141,70,4,
      138,74,74,74,24,105,48
9250 DATA 141,69,4,173,9,220,170,41,
      15,105,48,141,73,4,138,74
9260 DATA 74,74,74,24,105,48,141,72,4,
      173,8,220,105,48,141,75
9270 DATA 4,169,32,141,65,4,141,76,4,
      141,79,4,162,14,157,24
9280 DATA 4,202,208,250,169,58,141,68,
      4,141,71,4,169,46,141,74
9290 DATA 4,169,13,141,78,4,169,1,162,
      13,157,65,216,202,208,250,76,167,
      2
9300 DATA 120,169,49,234,141,20,3,169,
      234,234,141,21,3,88,96
9310 DATA 173,13,220,41,4,240,3,141,
      227,2,173,227,2,240,42,173,162,0
9320 DATA 106,106,106,41,12,141,32,
      208,41,4,141,24,212,240,11,162,5,
      189
9330 DATA 227,2,157,33,4,202,208,247,
      173,197,0,201,4,208,6,142,227,2
9340 DATA 142,24,212,76,49,234,0,1,12,
      1,18,13

```

Listing 2

```

0010 ; CIA ALARM CLOCK
0020 ; BY IAN ADAM
0030 ;
0035 ALARM .DE $02A7
0040 CINV .DE $0314
;HARDWARE INTERRUPT
0050 MESSGE .DE $0418
; 'ALARM' DISPLAYED HERE
0055 SCRMSG .DE MESSGE+9
0060 DISP .DE $0441
;BEGINNING OF TIME DISPLAY
0065 BORDER .DE $D020
0070 SIDVOL .DE $D418
0080 DSPCLR .DE $D841
;COLOR MEMORY
0090 ;CIA #1 REGISTERS
; FOR TIME DISPLAY
0100 TENTHS .DE $DC08
0110 SECS .DE TENTHS+1
0115 MINS .DE TENTHS+2
0120 HOURS .DE TENTHS+3
0125 CIAINT .DE TENTHS+5
;CIA INTERRUPT
0130 ALCTRL .DE TENTHS+7
0135 INTPTR .DE $EA31
;NORMAL CONTENTS
0140 ;
0150 ; .BA $0340
0160 ;
0340-78 ;
0341-AD 14 03 0180 SEI
0344-A2 59 0190 LDA CINV
0346-EA 0200 LDX #L,START
0347-EA 0210 NOP
0348-EA 0220 NOP
0349-8E 14 03 0230 STX CINV
034C-AD 15 03 0240 LDA CINV+1
034F-A2 03 0250 LDX #H,START
0351-EA 0260 NOP
0352-EA 0270 NOP
0353-EA 0280 NOP
0354-8E 15 03 0290 STX CINV+1
0357-58 0300 CLI
0358-60 0310 RTS
0320 ;
0359-AD 0B DC 0330 ;START LDA HOURS
035C-AA 0340 TAX
035D-29 0F 0350 AND #$0F
035F-18 0360 CLC
0360-69 30 0370 ADC #$30
0362-8D 43 04 0380 STA DISP+2
0365-8A 0390 TXA
0366-10 04 0400 BPL LBLA
0368-A2 10 0410 LDX #$10
036A-10 02 0420 BPL LBLB
036C-A2 01 0430 LBLA LDX #$01
036E-8E 4D 04 0440 LBLB STX DISP+12
0371-A2 20 0450 LDX #$20
0373-29 10 0460 AND #$10
0375-F0 02 0470 BEQ LBLC
0377-A2 31 0480 LDX #$31
0379-8E 42 04 0490 LBLC STX DISP+1
037C-AD 0A DC 0500 LDA MINS
037F-AA 0510 TAX
0380-29 0F 0520 AND #$0F
0382-69 30 0530 ADC #$30
0384-8D 46 04 0540 STA DISP+5
0387-8A 0550 TXA
0388-4A 0560 LSR A
0389-4A 0570 LSR A
038A-4A 0580 LSR A
038B-4A 0590 LSR A
038C-18 0600 CLC
038D-69 30 0610 ADC #$30
038F-8D 45 04 0620 STA DISP+4
0392-AD 09 DC 0630 LDA SECS
0395-AA 0640 TAX
0396-29 0F 0650 AND #$0F
0398-69 30 0660 ADC #$30

```

(Continued on next page)

Commodore 64
and
VIC-20

SuperTerm

\$149⁹⁵

Telecommunications

with a difference!

Unexcelled communications power and compatibility, especially for professionals and serious computer users. Look us over; **SuperTerm** isn't just "another" terminal program. Like our famous Terminal-40, it's the one others will be judged by.

- **EMULATION**—Most popular terminal protocols: cursor addressing, clear, home, etc.
- **EDITING**—Full-screen editing of Receive Buffer
- **UP/DOWNLOAD FORMATS**—CBM, Xon-Xoff, ACK-NAK, CompuServe, etc.
- **FLEXIBILITY**—Select baud, duplex, parity, stopbits, etc. Even work off-line, then upload to system!
- **DISPLAY MODES**—40 column; 80/132 with side-scrolling
- **FUNCTION KEYS**—8 standard, 52 user-defined
- **BUFFERS**—Receive, Transmit, Program, and Screen
- **PRINTING**—Continuous printing with Smart ASCII interface and parallel printer; buffered printing otherwise
- **DISK SUPPORT**—Directory, Copy, Rename, Scratch

Program options are selected by menus and function keys. For maximum convenience, an EXEC file sets all options on start-up. SuperTerm may be backed-up for safety. Software on disk with special cartridge module.

Write for the full story on SuperTerm; or, if you already want that difference, order today!

Requires: Commodore 64 or VIC-20, disk drive or Datasette, and compatible modem. VIC version requires 16K memory expansion. Please specify VIC or 64 when ordering.

Smart ASCII Plus . . . \$59⁹⁵

The only interface which supports streaming — sending characters simultaneously to the screen and printer — with SuperTerm.

Also great for use with your own programs or most application programs, i.e., word processors. **Print modes:** CBM Graphics, TRANSLATE, DaisyTRANSLATE, CBM/True ASCII, and PIPELINE.

Complete with printer cable and manual. On disk or cassette.

VIC 20 and Commodore 64 are trademarks of Commodore Electronics, Ltd.

(816) 333-7200



**MIDWEST
MICRO Inc.**

311 WEST 72nd ST. • KANSAS CITY • MO • 64114

Commodore


Listing 2 (continued)

039A-8D	49	04	0670		STA DISP+8
039D-8A			0680		TXA
039E-4A			0690		LSR A
039F-4A			0700		LSR A
03A0-4A			0710		LSR A
03A1-4A			0720		LSR A
03A2-1B			0730		CLC
03A3-69	30		0740		ADC #30
03A5-8D	4B	04	0750		STA DISP+7
03AB-AD	0B	DC	0760		LDA TENTHS
03AB-69	30		0770		ADC #30
03AD-8D	4B	04	0780		STA DISP+10
03B0-A9	20		0790		LDA #20
03B2-8D	41	04	0800		STA DISP
03B5-8D	4C	04	0810		STA DISP+11
03B8-8D	4F	04	0820		STA DISP+14
03BB-A2	0E		0830		LDX #0E
03BD-9D	1B	04	0840	LBLD	STA MESSGE, X
03C0-CA			0850		DEX
03C1-D0	FA		0860		BNE LBLD
03C3-A9	3A		0870		LDA #3A
03C5-8D	44	04	0880		STA DISP+3
03C8-8D	47	04	0890		STA DISP+6
03CB-A9	2E		0900		LDA #2E
03CD-8D	4A	04	0910		STA DISP+9
03D0-A9	0D		0920		LDA #0D
03D2-8D	4E	04	0930		STA DISP+13
03D5-A9	01		0940		LDA #01
03D7-A2	0D		0950		LDX #0D
03D9-9D	41	DB	0960	LBLD	STA DSPCLR, X
03DC-CA			0970		DEX
03DD-D0	FA		0980		BNE LBLD
03DF-4C	A7	02	0990		JMP ALARM
03E2-7B			1000		SEI
03E3-A9	31		1010		LDA #L, INTPTR
03E5-EA			1020		NOP
03E6-8D	14	03	1030		STA CINV
03E9-A9	EA		1040		LDA #H, INTPTR
03EB-EA			1050		NOP
03EC-8D	15	03	1060		STA CINV+1
03EF-5B			1070		CLI
03F0-60			1080		RTS
			1090		
			1100		; UNUSED P. 2 AREA
			1110		
			1120		
			1130		.BA \$02A7
02A7-AD	0D	DC	1140		LDA CIAINT
02AA-29	04		1150		AND #04
02AC-F0	03		1160		BEQ BEGIN
02AE-8D	E3	02	1170		STA FLAG
02B1-AD	E3	02	1180	BEGIN	LDA FLAG
02B4-F0	2A		1190		BEQ RETURN
02B6-AD	A2	00	1200		LDA \$00A2
02B9-6A			1210		ROR A
02BA-6A			1220		ROR A
02BB-6A			1230		ROR A
02BC-29	0C		1240		AND #0C
02BE-8D	20	D0	1250		STA BORDER
02C1-29	04		1260		AND #04
02C3-8D	1B	D4	1270		STA SIDVOL
02C6-F0	0B		1280		BEQ LBL
02C8-A2	05		1290		LDX #05
02CA-BD	E3	02	1300	LOOP	LDA FLAG, X
02CD-9D	21	04	1310		STA SCRMSG, X
02D0-CA			1320		DEX
02D1-D0	F7		1330		BNE LOOP
02D3-AD	C5	00	1340	LBL	LDA \$00C5
02D6-C9	04		1350		CMP #04
02D8-D0	06		1360		BNE RETURN
02DA-BE	E3	02	1370		STX FLAG
02DD-8E	1B	D4	1380		STX SIDVOL
02E0-4C	31	EA	1390	RETURN	JMP INTPTR
02E3-00			1400	FLAG	.BY0
02E4-41	4C	41	1410		.BY 'ALARM'
02E7-52	4D		1420		.EN

MICRO™

Commodore Compass

by Loren Wright



Low-cost Word Processing for C-64

Commodore has been bringing out a great deal of software for the Commodore 64 lately. Most of it is very good and most of it is priced less than competing products. *Easy Script* is no exception.

It is very much like Steve Punter's *Word Pro 3 Plus/64* (sold by Professional Software and Pro-Line and reviewed earlier in this column). In fact, the overall design and command syntax are nearly identical. There are several differences, and most of them work in favor of *Easy Script*.

Like *Word Pro 3 Plus/64* (which I hereafter refer to as simply *Word Pro*), *Easy Script* uses a wordstream format, which results in words being split across the end of a screen line. Screens of the two word processors look very similar. *Easy Script's* is a bit easier to follow because the cursor flashes and because line endings and format characters appear in reverse field. *Easy Script* allows you to set a working screen width of up to 80 characters. This makes working with tabular and indented material much easier, but typing on this wider screen is not very convenient due to the necessary panning across the 40-column screen. There is also an output-to-video function (lacking in the C-64 version of *Word Pro*), which allows you to see what your document looks like before you print it out. While viewing the video output you can select any page or pages for printing out. With *Word Pro* you get all or nothing.

Easy Script can be used with either cassette or disk, but not both at the same time. Editing is more convenient, particularly since there are true block-delete, -transfer, and -copy commands. *Word Pro* only allows these operations on whole screen lines. There is also a major difference in the files produced by the two word processors. *Word Pro* produces *program* files, while *Easy Script* produces *sequential* files. Sequential files are more accessible

from other programs, including your own BASIC programs. *Easy Script* allows considerably more text in memory at one time — 764 lines vs. 329. It is also possible to save only part of the text in memory to a disk file.

Easy Script lacks the "extra text" feature of *Word Pro*, but at least one use of it is taken care of: *Easy Script* makes it possible to get a disk directory without wiping out text in memory. Another use of extra text is not duplicated. *Easy Script* has no "append characters" or "append text" features. With *Word Pro* it is possible to label a number of frequently used phrases or text segments in extra text and call them into main text with a few keystrokes.

Word Pro was once the best word processor available for Commodore machines. It can no longer claim that honor. As each new Commodore machine has come out, a new version of *Word Pro* has become available, but instead of taking advantage of the features of the machine, only enough changes to get it running have been made. *Easy Script* is a better word processor, and, according to Jim Strasma and a number of others, *Paper Clip* from Batteries Included is also better. *Easy Script* is especially attractive because of its price. Commodore won't quote a suggested retail price, but \$50 is a good guess.

The Complete Personal Accountant

Since I am now completely self-employed, I suddenly need to keep much better financial records. I was intrigued by Jim Strasma's number one rating for *Complete Personal Accountant* in last month's Commodore Buyer's Guide, so I obtained a copy with the idea of reviewing it here. I now have a good start on getting my finances in order!

Formerly called *The Color Accountant*, *Complete Personal Accountant* is actually a set of programs that work

together in various ways. The heart of the package is the Chart of Accounts, which operates with the Checkbook Maintenance, Financial Statements, and Budget Analysis programs. Setting up is a little involved, but extra time spent in set-up is rewarded in time saved in maintaining your records. The first order of business is to set up your chart of accounts. There is a standard chart provided, but you will surely want to make changes, additions, and deletions. Accounts in the chart are divided into assets, income, liabilities, equity, and expense accounts. There is room for 99 different accounts, with up to 9 subcategories in each, up to a total of 300 subcategories. Next, you go through your checkbook, check by check and deposit by deposit. As you enter each item, you decide what account to credit or debit. Each check and deposit is automatically entered on the disk file. When you're done, not only have you balanced your checkbook, but you have also recorded your expenditures in the different accounts. There is provision for more than one checking account, although these files must be stored on separate disks, and you may indicate some payments to take place automatically. There is a great deal of support for error checking and for making backup copies of your disks.

When you have your checkbook balanced, you can then proceed to generating financial statements or to budget analysis. Other capabilities of these programs include generating checks from your computer, graphing results in color on the screen or on a VIC printer, and checkbook search. The other programs, which don't work with the ones mentioned above, include a Payments Calendar, Appointments Calendar, and Mailing List.

I had a little trouble figuring out when a debit subtracts from and when it adds to an account. An appendix in the excellent manual explains these terms — I wish I had read it before I started entering checks! *Complete Personal Accountant* is available from Programmer's Institute for \$79.95. The cassette version is \$74.95, and the package has been divided into three parts for about \$30 each.

Getting Started in Machine Language

There are several things you can do with your VIC or C-64 in machine

Commodore

language that you can't do in BASIC, and there are many things that can be done faster. For instance, using BASIC to clear the high resolution screen is a very slow process that takes a fraction of a second in machine language, and raster interrupt programming is virtually impossible in BASIC. As the computer comes, though, there is little that you can do beyond simple programs that you POKE in from DATA statements. Larger and more expensive computers have built-in machine language monitors, while less expensive, smaller computers, including Atari, Color Computer, VIC, and Commodore 64 do not. A monitor is a program that lets you look at and modify the contents of memory locations and processor registers, and load and save ranges of memory. An *extended* monitor is one that adds extra functions, such as a disassembler, a mini-assembler, and trace and break-point capability. Monitors are available on cartridge, disk, or cassette. Some of the better known monitors for Commodore machines are VICMON, 64MON, HESMON, SUPERMON, MICROMON, and TINYMON. There is also a

minimal monitor included with Richvale Telecommunication's V-Link and 64-Link cartridges. VICMON and 64MON are cartridges available from Commodore; HESMON is available on cartridge for both machines from Human Engineered Software; and the others are disk or cassette-based monitors available as listings in magazines or from user's groups. One of the commercial cartridges will cost \$40-\$50. The others are free or nearly free.

You should also have a copy of the *Programmer's Reference Guide* for your computer and a good general 6502 programming book, such as Lance Laven-thal's *6502 Assembly Language Programming*.

The next step is to get a full-fledged assembler. This will cost about \$100. I have been using PAL (by Brad Templeton, sold by Pro-Line Software) and find it especially convenient because it's designed to work with POWER, which I reviewed here earlier. PAL does not have macros or conditional assembly, but it has several advantages, such as using the BASIC editor for source files. It is quite a bit

smaller than others and is relatively position-independent. MAE, from Eastern House Software, is a full-featured assembler that is well supported. It is still the only assembler available for all the major 6502 machines. I have used versions for the PET since the beginning. Commodore's assembler is also an excellent package that includes macros and conditional assembly. There are other programs beyond the assembler, such as Pterodactyl's *PTD 6502/6510 Debugger*, but they are for pretty serious programming.

If you are at all serious about learning about computers, you owe it to yourself to explore machine language. Many things will suddenly become much clearer. You may not end up doing a lot of assembly language programming, but just the exercise will be rewarding.

MICRO™

You may contact Loren Wright
at P.O. Box 6502
Amherst, NH 03031.


FOR APPLE II PLUS, FRANKLIN, APPLE IIe Font DownLoader*

Expand the capacity of your printer hundreds of times

Load custom fonts into your Apple® Matrix Printer, Pro-writer™ 8510A, OKI® Microline 92, 93, 84 Step II, and Epson® FX and use them with virtually every word processor to turn your printer into a **custom type-setter**. After the fonts are loaded, they will stay in your printer until it's turned off. A font editor is also provided to allow you to create your own graphics, text, foreign language letters, math and electronics symbols to load into your printer.

On-Disk (Specify Printer)
..... \$39.00

*Requires printer interface that adheres to Apple protocol (Tymac, Apple, Epson, etc.) (Will not work with Pkaso, Wizard and some others)

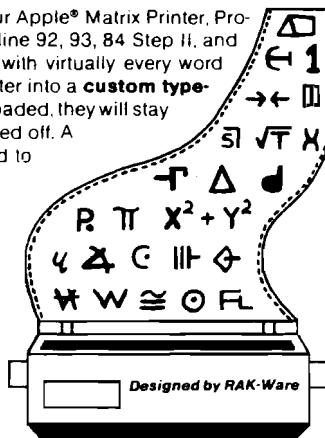

➔ \$100 REWARD ➔

Submit the best or most unique font using the above software and we will make you \$100 richer. Other prizes for the first 25 runners up.

Dealer and Distributor
Inquiries Invited



1342 B Rt. 23, Butler, NJ 07405
201-838-9027

MICRO
WARE

C64-FORTH for the Commodore 64

FORTH SOFTWARE FOR THE COMMODORE 64

C64-FORTH (TM) for the Commodore 64 - \$99.95

- Fig Forth-79 implementation with extensions
- Full feature screen editor and macro assembler
- Trace feature for easy debugging
- 320x200, 2 color bit mapped graphics
- 16 color sprite and character graphics
- Compatible with VIC peripherals including disks, data set, modem, printer and cartridges
- Extensive 144 page manual with examples and application screens
- "SAVETURNKEY" normally allows application program distribution without licensing or royalties

C64-XTEND (TM) FORTH Extension for C64-FORTH - \$59.95

- (Requires original C64-FORTH copy)
 - Fully compatible floating point package including arithmetic, relational, logical and transcendental functions
 - Floating point range of 1E+38 to 2E-39
 - String extensions including LEFT\$, RIGHT\$, and MID\$
 - BCD functions for 10 digit numbers including multiply, divide, and percentage. BCD numbers may be used for DOLLAR.CENTS calculations without the round-off error inherent in BASIC real numbers.
 - Special words are provided for inputting and outputting DOLLAR.CENTS values
 - Detailed manual with examples and applications screens
- (Commodore 64 is a trademark of Commodore)

- TO ORDER - Specify disk or cassette version
- Check, money order, bank card, COD's add \$1.50
 - Add \$4.00 postage and handling in USA and Canada
 - Mass. orders add 5% sales tax
 - Foreign orders add 20% shipping and handling
 - Dealer inquiries welcome

PERFORMANCE MICRO PRODUCTS



770 Dedham Street, S-2
Canton, MA 02021
(617) 828-1209



MICROTM**Commodore Reviews**

Product Name: **SYSRES**
 Equip. req'd: Commodore 64 and 1541 disk drive
 Price: \$95.00
 Manufacturer: Solidus International Corp.
 1060 Roosevelt Crescent
 North Vancouver, BC
 Canada, V7P 1M3
 (604)984-0477

Description: *Sysres* is supplied on a single 5 1/4" disk. It extends and enhances the C-64 operating system. Originally developed for the PET, *Sysres* adds 33 new commands to BASIC and includes 11 DIS-support commands. The added commands provide such features as renumbering a program, search and replace, auto-line numbering, forward and backward scrolling through a listing, and many more. Some of these new commands function in different ways, depending upon the options selected, so that altogether over one thousand new functions are added. *Sysres* will function with an IEEE-488 adaptor, gaining access to larger, faster CBM dual disk drives and printers. It also supports non-CBM, ASCII printers.

Pluses: Although the number of features available is large, the syntax is clear and logical — quite easily mastered. Also notable is the fact that *Sysres* code is "hidden" — using almost none of the available program space. It can be booted without disturbing the resident BASIC program. From end-to-end *Sysres* appears to be well thought out and professionally implemented. In the "programmers aid" category *Sysres* is definitely a Cadillac. Note that programs written using *Sysres* do not need *Sysres* to run later.

Minuses: The system is supplied on a Master diskette that is copy protected. It cannot be backed up. However, Solidus guarantees replacement free of charge within 90 days of purchase, and replacement for \$10.00 thereafter.

Skill level required: This product is targeted for the serious programmer. However, it's logical, easily learned syntax should make it useful for anyone with even modest proficiency in BASIC.

Documentation: The *Sysres* master disk is accompanied by a 112 page user's guide in the form of a 3-ring hard-

(Continued on next page)

What's Where in the Apple


A Complete Guide to the Apple Computer

This **Revised Edition** of the famous Apple Atlas provides Apple computerists with a framework for understanding both the overall structure of the Apple system and programming techniques that exploit that knowledge.

What's Where in the Apple contains the most complete memory map ever published as well as detailed information needed for actual programming.

All for only \$24.95
(plus \$5.00 s/h)

MICRO makes it easy to order.
Send check (payable to *MICRO*) to:

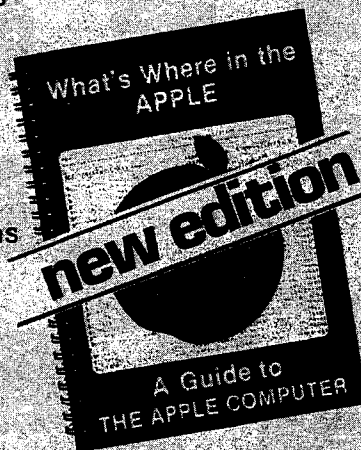

For owners of the original edition, *MICRO* is offering a companion book, **THE GUIDE to What's Where in the Apple**, for only \$9.95 (plus \$2.00 s/h).

THE GUIDE contains all new material that explains and demonstrates how to use the Atlas and Gazetteer published in the original volume of *What's Where in the Apple?*

For Fast Service
Call our toll free number:
1-800-354-8112
(In PA 1-800-662-2444)

MICRO
P.O. Box 6502, Chelmsford, MA 01824

VISA and MasterCard accepted.

MA residents add 5% sales tax.

backed, loose-leaf notebook. However, it is very good in the description of the syntax and use of Sysres. Each command is fully explained and examples are given.

Reviewer: Roger Crites

Product Name: **Smart Ascii**
Equip. req'd: Commodore VIC-20 or '64 any memory configuration
Price: \$59.95
Manufacturer: Midwest Micro Associates
P.O. Box 6148
Kansas City, MO 64110

Description: *Smart Ascii* is a software/hardware package that interfaces the Commodore VIC-20 or '64 to any parallel printer using the "Centronics standard" protocol. The package consists of a cassette tape containing the software interface (there are separate versions for the VIC and '64, both on the same tape), and a three foot cable for connecting the computer to the printer via the user port.

Pluses: *Smart Ascii* is very easy to install and responds to the same type of commands as the VIC printer (OPEN, CMD, PRINT#). It has three very useful printing options: TRANSLATE translates selected control characters into a character string (reverse on becomes "[RVS]", etc.). "CBM" ASCII prints all uppercase, for program listings. "TRUE" ASCII prints upper and lowercase for word processing applications. The software is not protected and may be backed up to cassette or disk.

Minuses: The supplied cable is only three feet long. The software disables the RESTORE key, which makes life a little difficult if a program ends or is stopped with any of the screen or sound registers not reset.

Documentation: The documentation is very complete and clear. It is well organized, and includes a table of contents. A minor complaint is that the information concerning linefeed conventions and printer control codes, both of which are essential to proper operation of the printer, are hidden in the section labelled "Advanced Programmer Tips".

Skill level required: Minimal. Some knowledge of the printer being used may be required to set the linefeed convention correctly.

Reviewer: Michael Morris

Product Name: **Fundamentals of Mathematics**
Equip. req'd: Commodore 64 with 1541 disk drive
Price: 6-disk set-\$249.95
3rd grade level only-\$69.95 (2 disks)
5th grade level only-\$69.95 (2 disks)
9th grade level only-\$99.95 (3 disks)
Worksheets for Lessons/Programs
1-89-\$29.95
"Hands-on Preview" disk-\$9.95

Manufacturer: Sterling Swift Publishing Co.
7901 South IH-35
Austin, TX 78744
(512)282-6840

Description: An educational set of 89 lessons and programs that may be used with children from the third grade on. The lessons cover mathematics from reading and writing two to seven digit whole numbers through equation solving and hit almost everything in between. The package is formatted for use by teachers in the classroom. Each lesson is backed up with worksheets which may be reproduced for classroom use by the students. The worksheets are broken up into pre-test, sample problem, problem, and post-test to allow use as needed to reinforce the learning process.

Pluses: The lessons are well done. In fact this is one of the best teaching packages I have worked with. When the problems are answered correctly the success is congratulated by terms such as: very good, fabulous, etc.. When a wrong answer is given, it is simply stated without any chastisement. At the end of each lesson, if more than 40% of the answers were given wrong, the program suggests that a review might help.

Minuses: The program were evidently translated from PET versions and do not made good use of the color, graphics and sound available from the Commodore 64.

Documentation: As the programs with their worksheets are self explanatory, not much addition documentation is needed or supplied. It tells how to use the programs and suggests methods for obtaining the best learning results from children whose needs vary.

Skill level required: The program set is made to be used in a learning environment. This does not limit them to teacher use only as a parent could make good use of them at home to help the children develop their skills in mathematics. Almost no specific computer knowledge is required.

Reviewer: Richard E. DeVore

Product Name: **C64-FORTH**
Equip. req'd: Commodore 64 Computer; 1541 Disk drive & printer optional
Price: \$49.95
Manufacturer: Computer Marketing Services
300 W. Marlton Pike
Cherry Hill, NJ 08002
(609)795-9480


Description: *C-64 FORTH* is a cartridge based implementation of the language. It allows programming on the Commodore 64 with a language that is transportable between systems.

Pluses: It is extremely close to a standard version of FORTH and can be adapted to accept FORTH-79 standard

(Continued on page 38)

SJB DISTRIBUTORS

One Stop Shopping for COMMODORE Systems

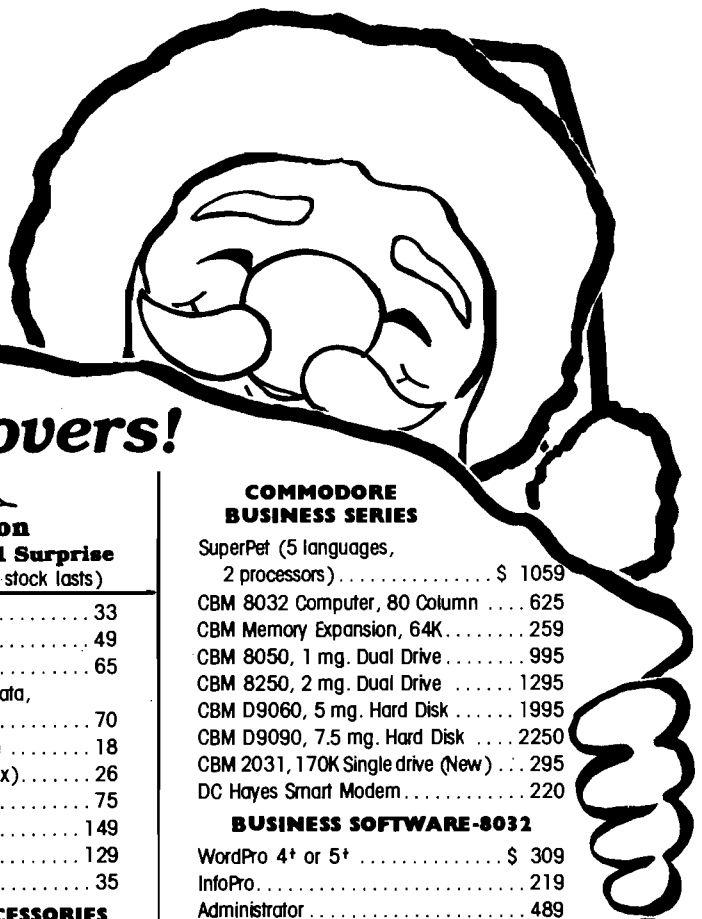

Gift Ideas for Computer Lovers!

Holiday Specials!

Word Processing \$1995.00

CBM 8032 CBM 8050 PET/IEEE CABLE
4022 PRINTER WP4+ VERBATIM DISKS

Recreation

Buy 2 Games, Get 1 Surprise
Game FREE! (while stock lasts)

NEW COMMODORE PRODUCTS

The Executive 64	Call
CBM B128-80	\$ 825
CBM B256-80	1095
CBM BX700	2990
B Series Software	Call
CBM 1520 Plotter	169
CBM 1526 Printer	349

SOFTWARE FOR CBM 64 BUSINESS

WordPro 3+ /64w/Spell Right Plus	\$ 95
Spell Right Plus	55
Calc Result (Advanced)	125
Calc Result (Easy)	75
Basicalc II	95
Mirage Concepts (Powerful Data Base)	95
M File (merge with WordPro)	89
Home Utilities	49
64 Mailing List (Galactic)	28
The Manager	50
Home Accountant (continental)	75
Code Writer (Writes Basic Programs)	95
Stock (Investment analysis)	80
Agricultural Management	Call
General Ledger, A/R, A/P, P/R, Inv	Call

RECREATION

Assembler Package (cassette or disk, compiled, includes editor, loader, disassembler)	39
Sprite Master (access)	30
Neutral Zone (access)	35
Space Belt	19
Pet Emulator	30
Coco II (build your own games)	40
Vic Tree (programmers utilities)	75
Micro-Term (save to printer disk)	39
Hesmon	35
Synthesound	45
Gothmogs Lair	30
Road Toad	15
Commodore Games	Call

INTERFACES & ACCESSORIES

80 Column Expander	\$ 159
VIC 1600 Modem	95
VIC 1650 (auto answer, auto dial)	150
VIC 1525 Graphic Printer	225
VIC 1530 Datasette Recorder	65
VIC 1541 Disk Drive	249
VIC Switch (connect 8 64's or Vics to printer, dd)	149

PET-IEEE cable	33
IEEE-IEEE cable (2m)	49
5 Slot Expander for 64	65
Parallel Interface (Epson, Okidata, IDS, NEC)	70
Programmers Reference Guide	18
Verbatim Diskettes (10 per box)	26
Hes Modem	75
ADA 1450	149
ADA 1800 (new)	129
Numeric Keypad	35

VIC PRODUCTS & ACCESSORIES

8K RAM Memory Expansion Cartridge	\$ 40
16K RAM	70
24K RAM	105
VIC 3 Slot Expander	27
VIC 6 Slot Expander	70
Gorf (64 also)	30
Omega Race	30
Arcade Joystick - Heavy duty w/2 firing buttons! Great for the VIC or 64	25
Auto Clock	125

MONITORS - GREAT RESOLUTION (64 OR VIC)

CBM 1701 Color Monitor	\$ 249
Amdek Color Plus	299
Panasonic TR-120 (w/speaker)	155
BMC (green screen)	95
Video/Audio Cable	15

PRINTERS - LETTER QUALITY

CBM 6400, 40 cps	\$ 1450
Diablo 620, 25 cps	949
Transtar 140 (serial)	1395
Transtar 130, 16 cps (auto load, wp features!)	769
NEC 3500 Series	1600
NEC 7700 Series	2350
TL 20	500

PRINTERS - DOT MATRIX

CBM 8023, 150 cps/graphics	\$ 545
CBM 4023 Printer	395
Epson FX Printer, 160 cps	549
Epson MX-80 FT w/graffrax	Call
Epson FX-100	859
Okidata 82A, 120 cps (serial and parallel)	429
NEC 8023A (parallel)	429
Okidata 92	559
Star Gemini, 10X	329
Star Gemini, 15	499
Transtar 315 (hi-res, color)	575

COMMODORE BUSINESS SERIES

SuperPet (5 languages, 2 processors)	\$ 1059
CBM 8032 Computer, 80 Column	625
CBM Memory Expansion, 64K	259
CBM 8050, 1 mg. Dual Drive	995
CBM 8250, 2 mg. Dual Drive	1295
CBM D9060, 5 mg. Hard Disk	1995
CBM D9090, 7.5 mg. Hard Disk	2250
CBM 2031, 170K Single drive (New)	295
DC Hayes Smart Modem	220

BUSINESS SOFTWARE-8032

WordPro 4+ or 5+	\$ 309
InfoPro	219
Administrator	489
VisiCalc (expanded)	199
BPI A/R, G/L, Job Cost, Inventory, Payroll	ea. 325

* NOTE *

SJB has a full line of computer media in stock,
call or write for more information.

**Product Selection Advice
Customer Service
214 - 343-1328**



SJB DISTRIBUTORS INC.

10520 Plano Road, Suite 206
Dallas, Texas 75238

To Order—Call Toll Free:

**800-527-4893
800-442-1048**
(Within Texas)

Business Hours:
Mon. - Fri. 8:30 - 5:30
Saturday 10 - 2

* POLICY *

VISA/MASTERCARD add 3%.
C.O.D. for Cash or Bank Check.
Exact Freight Calculated.

Products shipped with manufacturer's warranty.
Prices and stock subject to change without notice.
F.O.B. DALLAS, TEXAS.

*Customers must call for return authorization
before returning any product.

*Minimum order of \$50.00.

WRITE for FREE Catalog!

code. The language itself is extremely fast. It almost equals assembly language in its speed of operation. It is an excellent medium to write games in due to the speed of operation. Once learned, FORTH is much easier to write than assembly or machine language.

Minuses: The program does not come with sufficient information to start using it if you are not already familiar with the language. A disadvantage to someone who is used to using FORTH on another computer is the fact that it is supplied in a cartridge rather than on disk. Other implementations which I am familiar with are disk based. The manual does say that it is not a textbook on FORTH and supplies a list of reference material to help get you started.

Documentation: The 34 page User's guide & Reference Manual is broken into three parts. The first portion explains FORTH differences. The second and largest section contains a glossary of the words in C-64 FORTH while the third section explains how to get C-64 FORTH to work with FORTH-79 standard code. If you know something about FORTH or are willing to learn outside of the provided information, you will find that it is a good implementation. The manual, within the above limitations, presents the information clearly.

Skill level required: User who has progressed beyond the beginner stage.

Reviewer: Richard E. DeVore

Product Name: Passive Solar Design Program for Home Owners

Equip. req'd: Commodore 64 with 1541 disk drive or Dattasette

Price: \$99.95

Manufacturer: Don Danvlyk
1538 Ohio Ave.
Virginia Beach, VA 23454
(804)425-7792

Description: A solar design program for the Commodore 64 that helps determine the effectiveness of your design. The program will help design add-on greenhouses or direct solar-gain passive structures. The choices are: a solar addition without heat storage; an addition with un-insulated heat storage; an addition with well insulated heat storage; and an addition using direct solar gain.

Pluses: The program gives a full financial breakout for each of your designs if desired. It also states whether or not the design is economically feasible. It does this through comparing heat savings to project cost and heat savings to interest that could have gotten from the same investment.

Minuses: The computations are approximate rather than actual. If you want to change a dimension while inputting your design, the program takes you back to the menu.

Documentation: Almost non-existent. The saving grace is that after trying the program several times, you won't need documentation.

Skill level required: Could be used by a beginning computerist.

Reviewer: Richard E. DeVore


MICRO™

HOW MUCH LONGER WILL YOU LAST?

How long can you endure? When will it end?... We're not talking about a new shoot 'em up game for the Commodore 64, but Commodore's own disk operating system! Commodore made a great computer in the 64 but left its disk operating system out in the cold. If you've been waiting for a true disk operating system, here it is!... If you've been waiting for a great BASIC language enhancement that will let you utilize the Commodore's many special features, here it is! What is it? It's grafDOS, the great new utility from Xylex Software that allows the user to actually become friendly with the Commodore 64! grafDOS includes commands like DELETE, RENAME, CATALOG, RUN, etc. The BASIC allows you to do high resolution and low resolution graphics, sound, sprite program, plus much, much more for a total of 40 commands! Plus included in every package is MINIMON, a powerful machine language monitor that includes another 20 commands for use in machine language. The disk also comes with sample programs and demos including a great music generator! And all this together is only \$49.95! How could you have lasted this long without it?

DON'T WAIT ANY LONGER!

Make your programming easier! grafDOS is available now at your local dealer or:



INTERESTING SOFTWARE

21101 S. Harvard Blvd.
Torrance, CA 90501
(213) 328-9422

Visa/MC/Check/Money Order
Add \$2.00 shipping
CA residents add 6½% sales tax.
Dealer inquiries invited.



Typing in the Listing

The assembly listing is for reference only, the data statements for populating the machine language are contained in the BASIC program (listing 1). After seeing how the program on line 760 can be changed to eliminate the initial screen display each time the program runs.

- Features:
- ✓ 256 program lines
 - ✓ 23 columns of comment fields
 - ✓ support for
 - ✓ optional zero
 - ✓ multiple state
 - ✓ display of disk file

Operating Instructions

- @ performs calculations
- " zeros user variables
- ESC enters file mode
- Space enters comment field
- & clears screen
- right arrow moves up one line

Listing 1

```

10 REM * MICROCALC
20 REM * BY P. DALEY
30 REM * COPYRIGHT (C) 1983
40 REM * BY MICRO INK
50 FOR II = 1 TO 29:C$ = C$ + " ":NEXT C$ = C$ +
  "*"
60 D$ = CHR$(4):HOME : GOTO 550
70 VTAB XX: PRINT B$(XX);
80 IF MID$(B$(XX),2,1) = "?" THEN PRINT BB$(XX
  ):
90 IF XX = 24 THEN CALL - 868: GOTO 130 L
100 INVERSE
110 PRINT CHR$(BB): RIGHT$(C$,29 - LEN(B$(XX
  )) - LEN(BB$(XX)));
120 NORMAL : PRINT A$(XX);: CALL - 868: PRINT
130 RETURN G
140 XX = 1: GOSUB 70
150 AA = PEEK(-16384): IF AA < 127 THEN 150
160 IF FLAG = 1 THEN FLAG = 0: FOR II = 1 TO 24:B
  B$(II) = "":NEXT
170 POKE -16368,0 B
180 AA = AA - 128
190 IF AA = 64 THEN FLAG = 1:BB = 32: GOSUB 70: GOTO
  400
200 IF AA = 38 THEN GOSUB 640:XX = 1: GOSUB 70: GOTO
  150
210 IF AA = 34 THEN GOSUB 1410: GOTO 150
220 IF AA = 44 OR AA = 59 OR AA = 93 THEN 350
230 IF AA > 39 AND AA < 95 THEN 320
240 BB = 32: GOSUB 70 D
250 IF AA = 32 THEN 360
260 IF AA = 13 THEN XX = XX + 1: IF XX > 23 THEN
  XX = 1
270 IF AA = 8 AND YY > 1 THEN B$(XX) = LEFT$(B$
  (XX), LEN(B$(XX)) - 1):YY = YY - 1: GOTO 290
280 IF AA = 8 AND YY = 1 THEN B$(XX) = "":YY = YY
  - 1
290 IF AA = 21 THEN XX = XX - 1: IF XX < 1 THEN X
  X = 23
300 IF AA = 27 THEN GOTO 1100
310 GOTO 340
320 YY = YY + 1: IF YY > 28 THEN BB = 32: GOSUB 70
  :XX = XX + 1:YY = 0: GOTO 340
330 B$(XX) = B$(XX) + CHR$(AA)
340 YY = LEN(B$(XX)):BB = 95: GOSUB 70
  
```

```

350 GOTO 150
360 VTAB XX: HTAB 31 C
370 INPUT A$(XX)
380 IF LEN(A$(XX)) > 9 THEN A$(XX) = LEFT$(A$
  (XX),9)
390 HTAB 1: GOSUB 70:XX = XX + 1: GOTO 340
400 FOR II = 1 TO 24:CT = 0:BUF = 511: POKE 216,0
410 IF LEN(B$(II)) < 2 THEN 530
420 IF MID$(B$(II),2,1) < ">" THEN 490 E
430 FOR JJ = 1 TO LEN(B$(II))
440 IF MID$(B$(II),JJ,1) = ":" THEN FG = 1: GOSUB
  470: GOTO 460
450 POKE BUF + JJ, ASC(MID$(B$(II),JJ,1)):CT =
  CT + 1
460 NEXT JJ F
470 POKE BUF + JJ,13:BUF = BUF - (CT + 1): ONERR
  GOTO 1360
480 CT = 0: CALL 768: IF FG = 1 THEN FG = 0: RETURN
490 IF MID$(B$(II),2,1) < ">" THEN 530
500 GOSUB 810
510 BB$(II) = " " + STR$(X1)
520 XX = II:BB = 32: GOSUB 70
530 NEXT II
540 XX = 1: GOTO 340
550 FOR II = 1 TO 29:S$ = S$ + "*":NEXT
560 SS$ = "*" A
570 VTAB 5: PRINT S$: FOR II = 1 TO 10
580 PRINT SS$: NEXT
590 PRINT S$: VTAB 8: HTAB 5: PRINT "MICRO CALC F
  OR APPLE"
600 VTAB 10: HTAB 5: PRINT "BY P. DALEY"
610 VTAB 12: HTAB 5: PRINT "COPYRIGHT (C) 1983"
620 DIM B$(25),A$(25),BB$(25)
630 GOSUB 690: GOTO 1190
640 INVERSE : VTAB 1
650 HOME
660 FOR II = 1 TO 23: PRINT C$
670 B$(II) = "":A$(II) = " "
680 NEXT : GOSUB 1410: NORMAL : RETURN
690 FOR II = 768 TO 805 K
700 READ AA: POKE II,AA: NEXT
710 DATA 165,184,72,165,185,72,169,0,133,184
720 DATA 169,2,133,185,32,89,213,169,0,133
730 DATA 184,169,2,133,185,32,70,218,104,133
  
```

(Continued on next page)

Listing 1 (continued)

```

740 DATA 185,104,133,184,96
750 DATA 104,104,96
760 REM RETURN:REM TAKE OUT FIRST REM TO REMOVE
    STARTUP VARIABLES
770 FOR II = 1 TO 15: READ A$(II),B$(II): NEXT
780 RETURN
790 DATA PRINCIPAL,A=8000,,NUM MNTHS,M=48,,INT
    RTE,I=11.9,,MNTLY IR,I=I/1200,,
800 DATA DIVISOR,D=(1-(1+I)^-M)/I,,MONTH RTE,P=A
    /D,,ROUND,P=INT(P*100+.5)/100,,PAYMENT,P?
810 JJ = ASC ( LEFT$ ( B$(II),1) ) - 64
820 ON JJ GOTO 840,850,860,870,880,890,900,910,92
    0,930,940,950,960,970,980,990,1000,1010,1020,
    1030,1040,1050,1060,1070,1080,1090
830 RETURN
840 X1 = A: RETURN
850 X1 = B: RETURN
860 X1 = C: RETURN
870 X1 = D: RETURN
880 X1 = E: RETURN
890 X1 = F: RETURN
900 X1 = G: RETURN
910 X1 = H: RETURN
920 X1 = I: RETURN
930 X1 = J: RETURN
940 X1 = K: RETURN
950 X1 = L: RETURN
960 X1 = M: RETURN
970 X1 = N: RETURN
980 X1 = O: RETURN
990 X1 = P: RETURN
1000 X1 = Q: RETURN
1010 X1 = R: RETURN
1020 X1 = S: RETURN
1030 X1 = T: RETURN
1040 X1 = U: RETURN
    
```

I

```

1050 X1 = V: RETURN
1060 X1 = W: RETURN
1070 X1 = X: RETURN
1080 X1 = Y: RETURN
1090 X1 = Z: RETURN
1100 HOME : ONERR GOTO 1190
1110 VTAB 10: INVERSE : PRINT "S";
1120 NORMAL : PRINT "AVE OR ";
1130 INVERSE : PRINT "L";
1140 NORMAL : PRINT "OAD?";
1150 PRINT : PRINT "<RETURN> FOR CATALOG."
1160 GET A$: PRINT : IF ASC (A$) = 13 THEN PRINT
    D$"CATALOG": GET A$: GOTO 1100
1170 IF A$ = "S" THEN GOSUB 1200
1180 IF A$ = "L" THEN GOSUB 1270
1190 POKE 216,0: HOME : BB = 32: FOR XX = 1 TO 24:
    GOSUB 70: NEXT : BB = 95: HTAB 1: GOTO 140
1200 PRINT : PRINT "FILENAME?": INPUT F$:F$ = F$ +
    ".CAL":B$(24) = F$
1210 PRINT D$"OPEN"F$
1220 PRINT D$"WRITE"F$
1230 FOR II = 1 TO 25
1240 PRINT A$(II): PRINT B$(II)
1250 NEXT
1260 PRINT D$"CLOSE": RETURN
1270 PRINT : PRINT "FILENAME?": INPUT F$:F$ = F$ +
    ".CAL"
1280 PRINT D$"OPEN"F$
1290 PRINT D$"READ "F$
1300 FOR II = 1 TO 25
1310 INPUT A$(II)
1320 GET A$: IF A$ = CHR$(13) THEN
1330 B$(II) = B$(II) + A$: GOTO 1320
1340 NEXT
1350 PRINT D$"CLOSE": RETURN
1360 POKE 216,0
1370 VTAB II: HTAB 23: FLASH
1380 PRINT "<-SYNTAX ERROR";
1390 NORMAL : CALL - B68: HTAB 1
1400 XX = 1: GOTO 340
1410 A = 0:B = 0:C = 0:D = 0:E = 0:F = 0:G = 0:H =
    0:I = 0:J = 0:K = 0:L = 0:M = 0:N = 0:O = 0:P
    = 0:Q = 0:R = 0:S = 0:T = 0:U = 0:V = 0:W =
    0:X = 0:Y = 0:Z = 0: RETURN
    
```

H

M

SCIENTIFIC SOFTWARE ASSOCIATES, LTD.

SCIENTIFIC SOFTWARE ASSOCIATES, LTD.

Q-card

Questionnaire Analysis Software

- Microcomputer based
Avoid the expense of contract services -- do everything in-house on your own Apple II+ microcomputer.
- Easy data entry
Avoid time consuming keypunching. Uses respondent-marked cards entered with an Optical Mark Reader (keyboard entry also possible).
- Comprehensive data analysis
Sort on any variable(s), tally all responses, conduct cross tabs, correlations, linear regression, frequency distributions, and more.
- Complete editing capabilities
Weight items, derive composites, add or delete items, and more.
- Easy-to-use
Programs are user friendly, menu driven, and interactive. No special computer expertise is required.

Call or send for more information today.

SCIENTIFIC SOFTWARE ASSOCIATES, LTD.

BOX 208 • WAUSAU, WI 54401
TELEPHONE: (715) 845-2066

Apple II+ is a registered trademark of Apple Computer, Inc.

Listing 2

```

1          TTL "INPUTTING STATEMENTS"
2          *****
3          *
4          *   INPUTTING STATEMENTS
5          *   ON THE APPLE II
6          *
7          *   PHIL DALEY
8          *
9          TXTPTR   EPZ $88
10         INPUT   EQU $200
11         TOKEN   EQU $D559
12         LET     EQU $DA46
13         *
14         ORG     $300
15         START   LDA TXTPTR
16                 PHA
17                 LDA TXTPTR+$1
18                 PHA
19                 LDA #INPUT
20                 STA TXTPTR
21                 LDA /INPUT
22                 STA TXTPTR+$1
23                 JSR TOKEN
24                 LDA #INPUT
25                 STA TXTPTR
26                 LDA /INPUT
27                 STA TXTPTR+$1
28                 JSR LET
29                 PLA
30                 STA TXTPTR+$1
31                 PLA
32                 STA TXTPTR
33         END     RTS
34         END     END
    
```

MICRO

APPLE CAT SORT

A Catalog Sorter for the Apple II requires:

Apple II with at least 32K
RAM, disk drive with DOS 3.3

by Mark Harris

When I purchased my Apple II+ a few years ago, my first disk was a model of organization. With only a few programs on the disk, it was easy to find any one of them. Now, with dozens of disks and hundreds of files littered around my basement, I have become a victim of creeping overhead; an ever-increasing fraction of my time is devoted to locating files rather than using them. [Think about me with hundreds of disks-Ed.] I decided that one modest step towards putting things in order would be to alphabetize the catalog on each of my disks.

Of the 35 tracks on a standard DOS 3.3 disk, one (number 17) is set aside for keeping track of usage in the others. Most of the track is taken up by directory entries, each consisting of a file name and type, and a pointer to a track/sector list elsewhere on the disk. While these entries cannot be loaded or stored as a standard DOS file, they can be read and modified in a straightforward manner by the RWTS (Read or Write a Track and Sector) routine described on pages 94-98 of the DOS Manual. I set out to write a program which would read all current directory entries, sort them, and re-write them so that subsequent CATALOGs would list them in alphabetical order.

I first had to decide on what kind of sorting procedure to use, and whether to use BASIC or machine language. I started with the easiest combination to program: a simple bubble sort in BASIC. [For a description of all the sorts mentioned in this article, see [1].] After a few false starts (and destroyed directory tracks), I had the program functioning properly, but it took about two minutes to sort the catalog of a typical disk. I didn't know how the blame should be split between the slow speed of BASIC and my choice of sorting algorithm, so I replaced the bubble sort with the generally-faster Quick sort and tried again. The sorting time was reduced to one minute, but it was clear that BASIC was the primary culprit. I decided to throw in the towel and re-write the program in machine language. I also decided to use an insertion sort, which performs well for a short list (less than 50) that is already partially sorted. I thought this would be appropriate since [1] I anticipated

re-sorting my catalogs occasionally as new programs would be added, and [2] a disk cannot catalog more than 105 files, and typically has no more than 30 or 40.

The finished product listed in this article does the sort in under one second. The user is prompted by the program to insert the disk to be alphabetized into the drive (drive 1, slot 6) and to press the RETURN key. Then the program reads the directory entries, sorts them, re-writes them to disk, and calls the CATALOG routine in DOS. From the user's point of view, upon pressing RETURN he sees the alphabetized catalog in about the same length of time required for a standard CATALOG command. It is surprising to find that the disk has been updated in this short interval.

Using the Program.

After you have keyed in and saved the program, a simple "BRUN CAT SORT" will get you under way. The program will ask for the disk to be alphabetized to be inserted into the drive. I *strongly* suggest trying the program first on disks that you have backed up, just in case you made a mistake in entering the program. Since the program tampers with track 17, which is critical to accessing the other tracks, any scrambling of data could result in the effective loss of all files on the disk. However, you can take some comfort from the fact that even if track 17 is completely clobbered, standard utilities such as "FIND T/S LISTS UTILITY" in [2] can reconstruct the disk.

How the Program Works.

All of the secrets of direct access to directory entries are given in the DOS Manual. The pertinent information is given in the description of the RWTS routine [pp.94-98] and of the diskette directory [pp.129-131]. Each file on a disk has a 35 byte entry in the diskette directory on track 17. The first two bytes give the track and sector number of the track/sector list associated with the file, which in turn lists the locations of the actual data sectors. Following the track and sector numbers is a one-byte code for the file type (text, binary, etc.), then 30 bytes for the file name. Finally, the last two bytes give the number of sectors used by the file.

The first byte of the entry actually doubles as a flag. If the associated file has been deleted, an "FF" is entered in this position. If the entry has never been opened, a "00" is used. Since neither value represents a legitimate track number for file storage (track 0 is used for DOS), there is no conflict involved. The idea behind CAT SORT is to keep reading entries into a table in RAM until a "00" is encountered as the first byte. As the entries are read, if the lead byte is not "FF", the RAM address of the entry is put into a separate table. When all entries have been read, the entry table and the address table are duplicated in memory. A sort is done by swapping addresses rather than entries [this greatly speeds up the process] in one of the tables. When this is accomplished, entries in one entry table pointed to by the sorted addresses are transferred to the other entry table in the correct order [at the positions pointed to by the remaining address table]. The altered directory is written back to disk, and the CATALOG routine is called to show the fruits of these labors.

The sort used is very straightforward. An insertion sort

uses pretty much the same algorithm that most people would use for a manual sort of a few items. Suppose I want to alphabetize a stack of index cards, each of which has a single name on it. I start by taking the first two cards and swapping them if they are out of order. I take the third card and put it in the correct position in the first two. The fourth card is then inserted into the first three, and so on.

Bibliography

1. H.S. Gentry, *Sorting Techniques Explained*, Kilobaud Microcomputing, Nov 81, pp.156-160.
2. Worth & Lechner, *Beneath Apple DOS*, Quality Software, Reseda, CA 1981.

MICRO™

You may contact Mark Harris at Dept. of Mathematical Sciences, Appalachian State University, Boone, NC 28608.

Listing

```

* CAT SORT
* BY MARK HARRIS

* SORTS AND REWRITES THE
* CATALOG OF THE DISK IN
* DRIVE 1. USE ONLY WITH
* STANDARD DOS 3.3 DISKS

                                START
DIR          GEQU  $FE
TBL1         GEQU  $FC
A1           GEQU  $3C
A2           GEQU  $3E
A4           GEQU  $42
CH           GEQU  $24
DOSWARM      EQU   $3D0
CATALOG      EQU   $A56E
MOVE         EQU   $FE2C
CGUT         EQU   $FDED
RDKEY        EQU   $FDOC
HOME         EQU   $FC58
TABV         EQU   $FB5B

                                ORG  $4200
0031 4200 A200  AGAIN      LDX  #$00
0032 4202 8E0002        STX  $200
0033 4205 85FC          STX  TBL1
0034 4207 9E6D44        STX  NUMADR
0035 420A 205BFC        JSR  HOME
0036 420D * PRINT TITLE AND WAIT FOR (RET):
0037 420D A90C          LDA  #$0C
0038 420F 8524          STA  CH
0039 4211 A902          LDA  #$02
0040 4213 205BFB        JSR  TABV
0041 4216 A971          LDA  #MSGTTL
0042 4218 85FE          STA  DIR
0043 421A A944          LDA  /MSGTTL
0044 421C 85FF          STA  DIR+1
0045 421E 205243        JSR  MOUT
0046 4221 A90C          LDA  #$0C
0047 4223 8524          STA  CH
0048 4225 A904          LDA  #$04
0049 4227 205BFB        JSR  TABV
0050 422A A980          LDA  #MSGNM
0051 422C 85FE          STA  DIR
0052 422E A944          LDA  /MSGNM
0053 4230 85FF          STA  DIR+1
0054 4232 205243        JSR  MOUT

```

```

0055 4235 A900          LDA  #$00
0056 4237 8524          STA  CH
0057 4239 A90A          LDA  #$0A
0058 423B 205BFB        JSR  TABV
0059 423E A98F          LDA  #MSGINS
0060 4240 85FE          STA  DIR
0061 4242 A944          LDA  /MSGINS
0062 4244 85FF          STA  DIR+1
0063 4246 205243        JSR  MOUT
0064 4249 200CFD        GETCR JSR  RDKEY
0065 424C C98D          CMP  #$8D
0066 424E D0F9          BNE  GETCR
0067 4250

* SET UP JOB FOR READING
  DIRECTORY ENTRIES
* INTO $2000-2FFF:
                                LDA  #1
0068 4250 A901          STA  IBCHD
0069 4252 8D6444        LDA  #$40
0070 4255 A940          STA  TBL1+1
0071 4257 85FD          LDA  #$0F
0072 4259 A90F          STA  IBSECT
0073 425B 9D5D44        LDA  #$2F
0074 425E A92F          STA  IBUFF+1
0075 425E A92F          STA  IBUFF+1
0076 4260 8D6144
0077 4263
0078 4263
0079 4263
0080 4263 85FF          LP1   STA  DIR+1
0081 4265 204843        JSR  RWTS
0082 4268 A908          LDA  #$8
0083 426A 85FE          STA  DIR
0084 426C A000          LDY  #$00
0085 426E B1FE          NXTENT LDA  (DIR),Y
0086 4270 F02F          BEQ  DONERD
0087 4272 C9FF          CMP  #DIR+1
0088 4274 F00F          BEQ  ADD23
0089 4276 A5FE          LDA  DIR
0090 4278 91FC          STA  (TBL1),Y
0091 427A E6FC          INC  TBL1
0092 427C A5FF          LDA  DIR+1
0093 427E 91FC          STA  (TBL1),Y
0094 4280 E6FC          INC  TBL1
0095 4282 EE6D44        INC  NUMADR
0096 4285 18          ADD23 CLC
0097 4286 A923          LDA  #$23
0098 4288 65FE          ADC  DIR
0099 428A 85FE          STA  DIR
0100 428C D0E0          BNE  NXTENT
0101 428E AD5D44        NXTSEC LDA  IBSECT
0102 4291 C901          CMP  #1
0103 4293 F00C          BEQ  DONERD
0104 4295 CE5D44        DEC  IBSECT
0105 4298 CE6144        DEC  IBUFF+1
0106 429B AD6144        LDA  IBUFF+1
0107 429E 4C6342        JMP  LP1
0108 42A1
0109 42A1 AD6044        * COPY TRACK DUMP TO $3000-3FFF:
0110 42A4 853C          DONERD LDA  IBUFF
0111 42A6 8542          STA  A1
0112 42A8 AD6144        STA  A4
0113 42AB 853D          LDA  IBUFF+1
0114 42AD 18          STA  A1+1
0115 42AE 6910          CLC
0116 42B0 8543          ADC  #$10
0117 42B2 A9FF          STA  A4+1
0118 42B4 853E          LDA  #DIR+1
0119 42B6 A92F          STA  A2
0120 42B8 853F          LDA  #$2F
0121 42BA 202CFE        STA  A2+1
0122 42BD          JSR  MOVE
* COPY $4000-40FF TO $4100-41FF:
0123 42BD A900          LDA  #$0
0124 42BF 853C          STA  A1
0125 42C1 8542          STA  A4
0126 42C3 A9FF          LDA  #DIR+1
0127 42C5 853E          STA  A2
0128 42C7 A940          LDA  #$40
0129 42C9 853D          STA  A1+1
0130 42CB 853F          STA  A2+1

```

0131	42CD	A941	LDA	##41	0202	4358	20EDFD	JSR	CGOUT
0132	42CF	85A3	STA	A4+1	0203	435B	CB	INY	
0133	42D1	202CFE	JSR	MOVE	0204	435C	D0F6	BNE	NXTOUT
0134	42D4		* DO INDEX SORT ON ADDRESS LIST AT \$4100:		0205	435E	60	RET	RTS
0135	42D4	20CE43	JSR	SORT	0206	435F			
0136	42D7	AD6D44	LDA	NUMADR	0207	435F	AD6544	ERROR	LDA
0137	42DA	0A	ASL	A	0208	4362	C910		CMP
0138	42DB	8D6E44	STA	LSTBYT	0209	4364	D031		BNE
0139	42DE		* PUT ENTRIES IN ALPHABETICAL ORDER:		0210	4366	2058FC		JSR
0140	42DE		* MOVE ENTRIES INDEXED BY ADDRESS LIST AT		0211	4369	A900		LDA
0141	42DE		* \$4100 (POINTING TO \$3000-3FFF) TO		0212	436B	8524		STA
0142	42DE		* TO POSITIONS (\$2000-2FFF) POINTED TO		0213	436D	A908		LDA
0143	42DE		* BY LIST AT \$4000.		0214	436F	2058FB		JSR
0144	42DE	A200	LDX	##00	0215	4372	A9CD		LDA
0145	42E0	80C080	NXTMV	LDA	0216	4374	85FE		STA
0146	42E3	85FC		STA	0217	4376	A944		LDA
0147	42E5	8D0041		LDA	0218	4378	85FF		STA
0148	42E8	85FE		STA	0219	437A	205243		JSR
0149	42EA	E8		INX	0220	437D	A900		LDA
0150	42EB	8D0080		LDA	0221	437F	8524		STA
0151	42EE	85FD		STA	0222	4381	A90A		LDA
0152	42F0	8D0041		LDA	0223	4383	2058FB		JSR
0153	42F3	18		CLC	0224	4386	A9EC		LDA
0154	42F4	6910		ADC	0225	4388	85FE		STA
0155	42F6	85FF		STA	0226	438A	A944		LDA
0156	42F8		* MOVE ENTRY POINTED TO BY (DIR) TO		0227	438C	85FF		STA
0157	42F8		* POSITION POINTED TO BY (TBL1).		0228	438E	205243		JSR
0158	42F8	204C44		JSR	0229	4391	200CFD		JSR
0159	42F8	E8		INX	0230	4394	4C0042		JMP
0160	42FC	EC6E44		CPX	0231	4397	2058FC	NOTWP	JSR
0161	42FF	D0DF		BNE	0232	439A	A90F		LDA
0162	4301		* WRITE SORTED LIST TO DISK:		0233	439C	8524		STA
0163	4301	A902		LDA	0234	439E	A908		LDA
0164	4303	8D6444		STA	0235	43A0	2058FB		JSR
0165	4306	AD5D44		LDA	0236	43A3	A909		LDA
0166	4309	8D6F44		STA	0237	43A5	85FE		STA
0167	430C	A90F		LDA	0238	43A7	A945		LDA
0168	430E	8D5D44		STA	0239	43A9	85FF		STA
0169	4311	A92F		LDA	0240	43AB	205243		JSR
0170	4313	8D6144		STA	0241	43AE	A900		LDA
0171	4316	204843	NXTWRT	JSR	0242	43B0	8524		STA
0172	4319	AD5D44		LDA	0243	43B2	A916		LDA
0173	431C	CD6F44		CMP	0244	43B4	2058FB		JSR
0174	431F	F009		BEQ	0245	43B7	A9EC		LDA
0175	4321	CE5D44		DEC	0246	43B9	85FE		STA
0176	4324	CE6144		DEC	0247	43BB	A944		LDA
0177	4327	4C1643		JMP	0248	43BD	85FF		STA
0178	432A	206E45	FINISH	JSR	0249	43BF	205243		JSR
0179	432D	A914	ASKAGN	LDA	0250	43C2	200CFD		JSR
0180	432F	85FE		STA	0251	43C5	2058FC		JSR
0181	4331	A945		LDA	0252	43C8	4C2D43		JMP
0182	4333	85FF		STA	0253	43CB	200CFD		JSR
0183	4335	205243		JSR	0254	43CE			
0184	4338	200CFD		JSR	0255	43CE			
0185	433B	C9D9		CMP	0256	43CE			
0186	433D	D003		BNE	0257	43CE			
0187	433F	4C0042		JMP	0258	43CE			
0188	4342	2058FC	EXIT	JSR	0259	43CE			
0189	4345	4CD003		JMP	0260	43CE			
0190	4348		* SUBROUTINES:		0261	43CE			
0191	4348				0262	43CE			
0192	4348				0263	43CE			
0193	4348	A944	RWTS	LDA	0264	43CE			
0194	434A	A058		LDY	0265	43CE			
0195	434C	20D903		JSR	0266	43CE	A901		JSR
0196	434F	B00E		BCS	0267	43D0	8D6F44		STA
0197	4351	60		RTS	0268	43D3	AD6F44		LDA
0198	4352				0269	43D6	0A	JLP	ASL
0199	4352	A000	MOUT	LDY	0270	43D7	AS		TAY
0200	4354	B1FE	NXTOUT	LDA	0271	43D8	B90041		LDA
0201	4356	F006		BEQ	0272	43DB	85EC		STA
					0273	43DD	CB		INY
					0274	43DE	B90041		LDA
					0275	43E1	85ED		STA
					0276	43E3	AC6F44		LDY
					0277	43E6	88		DEY
					0278	43E7	8C7044		STY

(Continued on next page)

0279	43EA	AD7044	LLP	LDA	L	0355	4470	00	L	DC	H'00'
0280	43ED	0A		ASL	A	0356	4471				
0281	43EE	A8		TAY		0357	4471		* MESSAGE LIST:		
0282	43EF	B90041		LDA	TABL2, Y	0358	4471				
0283	43F2	85EE		STA	LADR	0359	4471	C3C1D4	MSGTTL	DC	C'DATALOG
0284	43F4	CB		INY			4474	C1CCCF			SORTER'
0285	43F5	B90041		LDA	TABL2, Y		4477	C7A0D3			
0286	43F8	85EF		STA	LADR+1		447A	CFD2D4			
0287	43FA	A003		LDY	#3	0360	447F	00		DC	H'00'
0288	43FC	B1EC	NXTCHR	LDA	(KADR), Y	0361	4480	C2D9A0	MSGNM	DC	C'BY MARK
0289	43FE	D1EE		CMF	(LADR), Y		4483	CDC1D2			HARRIS'
0290	4400	D007		BNE	DNCMP		4486	CB40C8			
0291	4402	C021		CPY	#33		4489	C1D2D2			
0292	4404	F003		BEQ	DNCMP		448C	C9D3			
0293	4406	CB		INY		0362	448E	00		DC	H'00'
0294	4407	D0F3		BNE	NXTCHR	0363	448F	C9CED3	MSGINS	DC	C'INSERT DISK
0295	4409	900A	DNCMP	BCC	NXTITM		4492	C5D2D4			TO BE
0296	440B	AC7044		LDY	L		4495	ACC4C9			ALPHABETIZED'
0297	440E	CB		INY			4498	D3CBA0			
0298	440F	203D44		JSR	RPLC		449B	D4CFA0			
0299	4412	4C3144		JMP	NXTJ		449E	C2C5A0			
0300	4415	AD7044	NXTITM	LDA	L		44A1	C1CCD0			
0301	441B	0A		ASL	A		44A4	C8C1C2			
0302	4419	A8		TAY			44A7	C5B4C9			
0303	441A	CB		INY			44AA	DAC5C4			
0304	441B	CB		INY		0364	44AD	8D		DC	H'8D'
0305	441C	A5EE		LDA	LADR	0365	44AE	C9CEA0		DC	C'IN DRIVE 1
0306	441E	990041		STA	TABL2, Y		44B1	C4D2C9			AND PRESS
0307	4421	CB		INY			44B4	D6C5A0			RETURN...'
0308	4422	A5EF		LDA	LADR+1		44B7	B1A0C1			
0309	4424	990041		STA	TABL2, Y		44BA	CEC4A0			
0310	4427	CE7044		DEC	L		44BD	D0D2C5			
0311	442A	10BE		BPL	LLP		44C0	D3D3A0			
0312	442C	A000		LDY	#00		44C3	D2C5D4			
0313	442E	203D44		JSR	RPLC		44C6	D5D2CE			
0314	4431	EE6F44	NXTJ	INC	J		44C9	AEAEAE			
0315	4434	AD6F44		LDA	J	0366	44CC	00		DC	H'00'
0316	4437	CD6D44		CMF	NUMADR	0367	44CD	D2C5CD	MSGWP	DC	C'REMOVE
0317	443A	D09A		BNE	JLP		44D0	CFD6C5		DC	WRITE-PROTECT
0318	443C	60		RTS			44D3	A0D7D2			TAB, THEN'
0319	443D	98	RPLC	TYA			44D6	C9D4C5			
0320	443E	0A		ASL	A		44D9	A0D0D2			
0321	443F	A8		TAY			44DC	CFD4C5			
0322	4440	A5EC		LDA	KADR		44DF	C3D4A0			
0323	4442	990041		STA	TABL2, Y		44E2	D4C1C2			
0324	4445	A5ED		LDA	KADR+1		44E5	ACA0D4			
0325	4447	CB		INY			44E8	C8C5CE			
0326	4448	990041		STA	TABL2, Y	0368	44EB	00		DC	H'00'
0327	444B	60		RTS		0369	44EC	D0D2C5	MSGPRESS	DC	C'PRESS ANY
0328	444C						44EF	D3D3A0			KEY TO
0329	444C	A000	MOVENT	LDY	#00		44F2	C1CED9			CONTINUE...'
0330	444E	E1FE	NXTBT	LDA	(DIR), Y		44F5	A0C8C5			
0331	4450	91FC		STA	(TBL1), Y		44F8	D9A0D4			
0332	4452	CB		INY			44FB	CFA0C3			
0333	4453	C023		CPY	#23		44FE	CFCE14			
0334	4455	D0F7		BNE	NXTBT		4501	C9CED5			
0335	4457	60		RTS			4504	C5AEAE			
0336	4458						4507	AE			
0337	4458		IOB	EQU	*	0370	4508	00		DC	H'00'
0338	445B	01	IBTYPE	DC	H'01'	0371	4509	C9AFCF	MSGIOER	DC	C'I/O ERROR.'
0339	4459	60	IBSLOT	DC	H'60'		450C	A0C5D2			
0340	445A	01	IBDRVN	DC	H'01'		450F	D2CFD2			
0341	445B	00	IBVOL	DC	H'00'		4512	AE			
0342	445C	11	IBTRK	DC	H'11'	0372	4513	00		DC	H'00'
0343	445D	00	IBSECT	DC	H'00'	0373	4514	B18D	MSGAGN	DC	H'818D'
0344	445E	6944	IBDCTP	DC	A'DEVI'PC'	0374	4516	D3CFD2		DC	C'SORT
0345	4460	002F00	IBBUFP	DC	H'002F0000'		4519	D4A0C1			ANOTHER DISK?
	4463	00					451C	CECFD4			(Y,N)'
0346	4464	00	IBCMD	DC	H'00'		451F	C8C5D2			
0347	4465	00	IBSTAT	DC	H'00'		4522	A0C4C9			
0348	4466	00	IBSMOD	DC	H'00'		4525	D3C8BF			
0349	4467	60	IDBPSK	DC	H'60'		4528	A0A8D9			
0350	4468	01	IOBPN	DC	H'01'		452E	ACCEA9			
0351	4469	0001EF	DEVI'PC	DC	H'0001EFDB'		452E	A0			
	446C	DB				0375	452F	00		DC	H'00'
0352	446D	00	NUMADR	DC	H'00'	0376	4530				
0353	446E	00	LSTBYT	DC	H'00'	0377	4530				END
0354	446F	00	J	DC	H'00'						

Fast and restless.

The new Delta-15 printer kicks out AnyCalc, easy as 1,2,3!

In a 9 to 5 world full of changing spreadsheet data, you need a business printer that moves fast. A printer that constantly fires out printed information. A printer called Delta-15.

Delta has the ability to print multi-copy spreadsheets at an intense 160 cps. Its throughput never rests. In fact, it never even wavers in speed. That means that Delta constantly fits the most work into every single second.

Delta comes in a 10" or 15½" carriage size. It offers you the flexibility of standard 8K parallel and serial interface. And has the ability to underline, accept macro instruction, and print characters that range from full graphics to everyday printing to scientific notations.

Plus, as always, you get our unique 180 day warranty (90 days on print head).


So for everyone who needs their spreadsheet data "yesterday," this is as close as you can come! The new fast and restless Delta-15 business printer from Star.

starTM
MICRONICS · INC

THE POWER BEHIND THE PRINTED WORD.

Computer Peripherals Division

P.O. Box 612186, Dallas/Ft. Worth Airport, TX 75261 (214) 456-0052

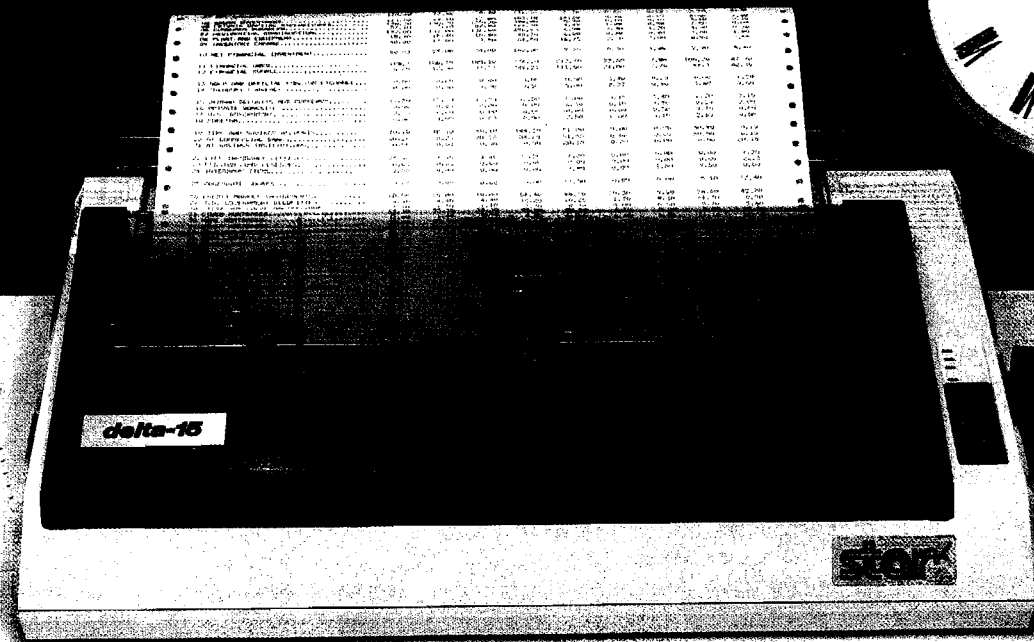

Richvale Telecommunications

10610 BAYVIEW (Bayview Plaza)
 RICHMOND HILL, ONTARIO, CANADA L4C 3N8
 (416) 884-4165

\$185⁰⁰ Canadian
\$149⁰⁰ U.S.
 PLUS CUSTOMS BROKERAGE,
 HANDLING AND MAILING CHARGE.


Also available
 for VIC 20

C64-LINK[®] The Smart 64

RTC

RTC

Call or write
 payments
 by VISA,
 MASTERCARD
 or BANK
 TRANSFER.
 Mail orders
 also by
 certified
 check, etc.

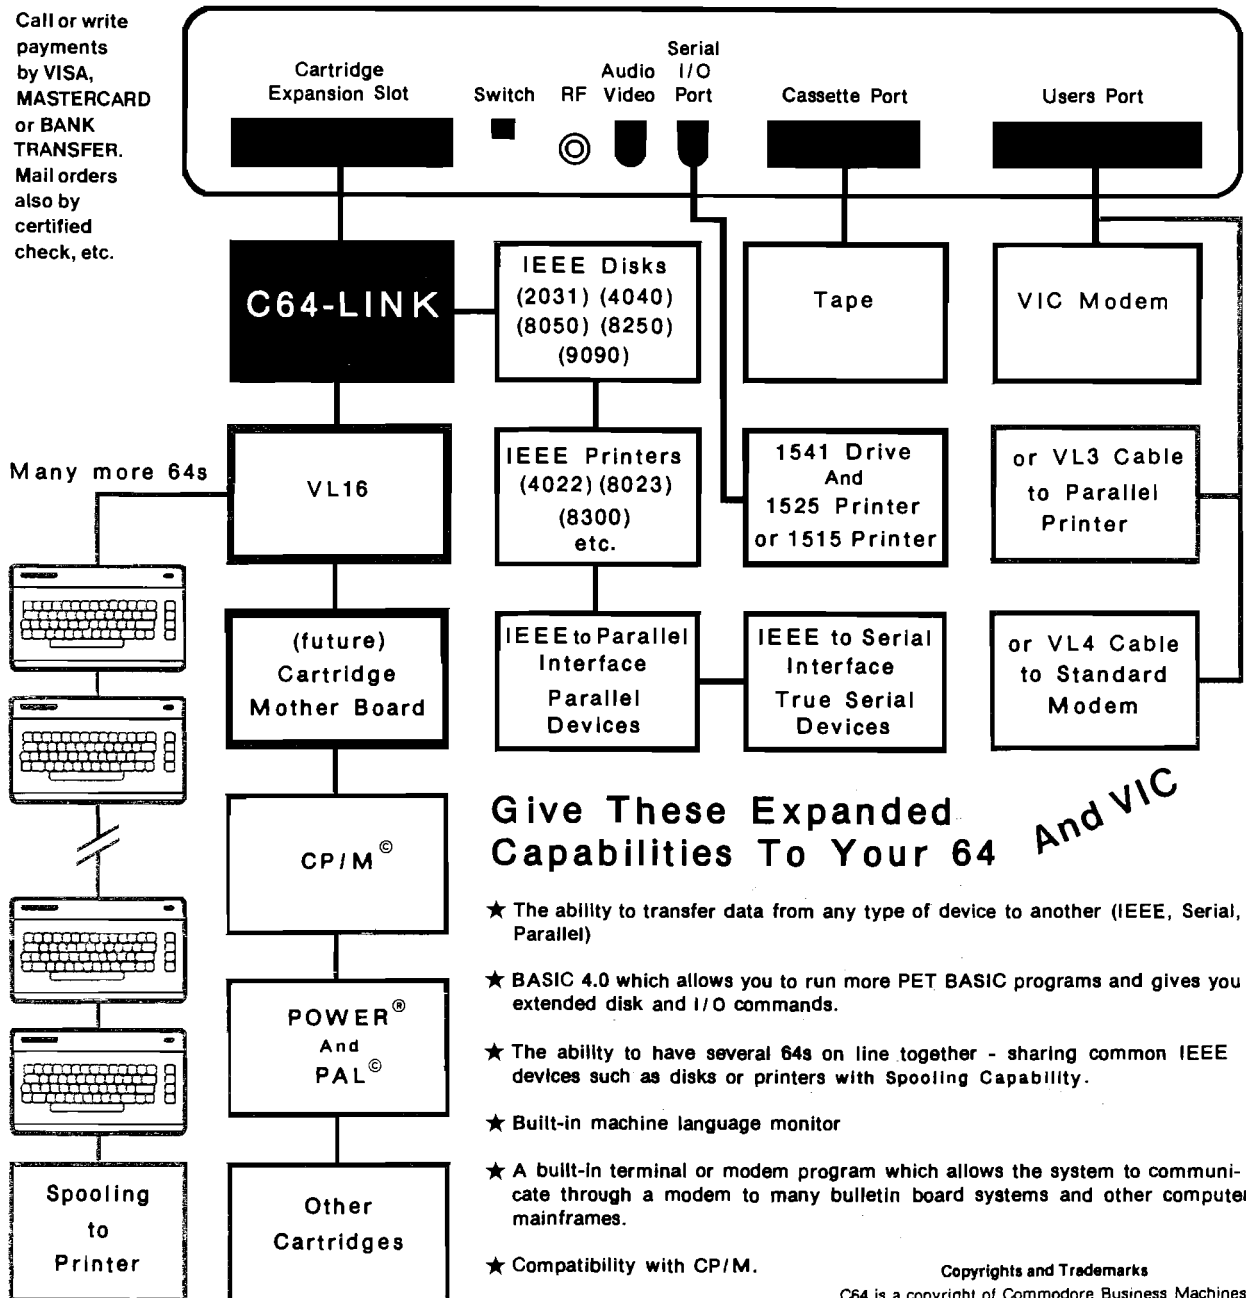

Give These Expanded Capabilities To Your 64 And VIC

- ★ The ability to transfer data from any type of device to another (IEEE, Serial, Parallel)
- ★ BASIC 4.0 which allows you to run more PET BASIC programs and gives you extended disk and I/O commands.
- ★ The ability to have several 64s on line together - sharing common IEEE devices such as disks or printers with Spooling Capability.
- ★ Built-in machine language monitor
- ★ A built-in terminal or modem program which allows the system to communicate through a modem to many bulletin board systems and other computer mainframes.
- ★ Compatibility with CP/M.

Copyrights and Trademarks

C64 is a copyright of Commodore Business Machines, Inc. C64-LINK is a copyright of Richvale Telecommunications. CP/M is a registered trademark of Digital Research. POWER is a trademark of Professional Software. PAL is a copyright of Brad Templeton.

Contact your local Commodore dealer or RTC.

Master Directory For The Apple

By Charles Hill

(Editor's note: This program is much longer than we normally publish. Since we think this is such an outstanding program (similar commercial ventures sell for over \$100), we are publishing it in two pieces. This month contains all the main routines for the menu and reading/writing the library file. Next month we will conclude the program with the print and sort routines.)

It never fails. No matter how hard you try to keep your disk library in some semblance of rational order, it never seems to remain that way for long. Files that you know are on a particular disk have disappeared, and others have mysteriously moved from one disk to another. If this sounds familiar to you, then here is the solution. MASTER DIRECTORY allows you to create one large file directory containing all the CATALOGS of your disks. There is room for 64 disk IDs and 1100 file names. This directory can be sorted and printed in a variety of ways and saved to disk for use later or by other programs.

Operating Instructions

To get started, simply type "BRUN MASTER DIRECTORY". The main menu will then be displayed — six options are available. Press the key corresponding to the number of your choice. If you make a mistake, press return as the next input and you will be returned to the menu.

The first option is to read the in-

Keep all your disk directories on a master file. Sort and Print the file for a quick reference to all your programs.

dividual disk directories. The program can only read DOS 3.3 disks. Pascal and CP/M disks use a different directory format and protected disks can't be read at all. To read the disk, insert it in drive one, enter the disk ID (1 to 8 characters) and press return. When you have CATALOGED all your disks, press return to re-enter the main menu.

The next two options allow the master directory to be saved to or read from the disk. Insert the disk into drive 1 and enter the filename. Any DOS errors that occur will be trapped and the appropriate error message printed.

Option 4 is for sorting the directory. A Shell-Metzner sort is used — it can sort 360 entries on two fields in nine seconds. To select the sort fields, enter the number next to the field name on the sort menu. One to three fields can be entered in any order. The first field entered is the most important descending to the last entered being the least important. The sort returns to the main menu when finished.

Printing the directory is the fifth option. Similar to the sort, up to three fields can be entered for printing in any desired order. To select the field, enter the number of the field from the sort mini-menu. A page eject is issued after each 65 lines. Be sure that top-of-form is set to the top of the page before printing. If this is not done, page breaks will occur during the middle of

a page. This routine also returns to the main menu.

The last option restores normal DOS and does a BASIC cold-start.

The Program

The program doesn't have a search function because in the time taken to load the directory and find the desired file name will take longer than to look it up in an alphabetized list kept next to your Apple. I keep one of these lists handy at all times. It has proven an invaluable time saver.

The first step is to set MAXFILES equal to 1. Modifications are made to DOS to allow direct access through use of machine language. This technique was described by William Reynolds III in his article *Using Text Files From Machine Language* in NIBBLE (2:2). Another modification allows the interception of DOS errors after the error message has been printed. The menu box is then set up and protected by lowering the top of the text screen. HIMEM is then lowered by 32 bytes to prevent overwriting DOS. The main loop is entered and a keypress is checked for to choose the correct subroutine. After completion of the main program, DOS is restored to its original condition and the program jumps to BASIC.

(Continued on next page)

The routine to read the CATALOG first zeroes the disk ID buffer. Each disk ID is stored in this buffer with an index to this name stored with each filename. The reading of individual entries is simple — consecutive directory sectors are read and processed. Each entry is checked to see if it was deleted or the end of the directory. When a good entry is found, the disk index, file type and file name are copied into the name buffer. The buffer pointer is incremented and a memory check is done with appropriate error handling. Then the next entry is read.

The routines to read and save the name file on disk enter the values normally set by BSAVE and BLOAD. Drive 1 is defaulted in the program, however, this may be changed. You may wonder why I use DOS directly rather than printing the commands (preceded by CTRL-D) to execute them. The reason is that DOS stores the letters of a command being printed in the input buffer at \$200. Since this is the buffer where I was reading the filename from while it was being printed, some very strange conflicts occurred. This problem took some time to find, but the new arrangement works perfectly. One item not

mentioned in Reynold's article is that the KEY WORDS FOUND byte at \$AA65 must be set appropriately for some routines to work correctly. The following is a list of these values (Table 1):

KEYWORD	VALUE
C	\$C0
I	\$A0
O	\$90
V	\$40
D	\$20
S	\$10
L	\$08
R	\$04
B	\$02
A	\$01

TABLE 1.

For example, with the BSAVE command, both the Address and Length parameters must be specified, so \$08 + \$01 = \$09. On the other hand, no parameters need be specified with a BLOAD, so the value is \$00.

The Shell-Metzner sort has appeared innumerable times with full ex-

planations in MICRO and other magazines, so I won't go into any detail here. The only part I will mention is the comparison of Disk IDs. For the file type and name, a direct comparison is made in the entries in the file names buffer. The disk ID is a single number of no alphabetic significance. It must first be converted to an address in the disk ID buffer. The IDs then pointed at are compared and a swap of the entries in the buffer made, if needed. The disk IDs are never reordered, they stay in the buffer in their original entry order and are accessed by pointer only.

There is a ROM multiply routine that I recently discovered that may be of use in your own programming. Put the numbers to be multiplied in \$64,65 and \$AD,AE. After calling \$E2B8, the result returns in the X register (low) and Y register (high).

After getting the numbers corresponding for the fields to be printed, the print routine converts these numbers to a range of 0-2. This value is used to test which field to print. The printer is initialized with a "PR#1". If your printer requires additional initialization, you will have to insert this code into the routine or it may be possible to initialize the printer before running the MASTER DIRECTORY program. The needed titles are printed and the fields are printed centered under the titles. The disk ID and file name are copied directly from the buffer. The file type is printed by borrowing some code from DOS at \$ADDB with some changes so that LISA files are indicated with an "L". When the printing is finished, a "PR#0" disconnects the printer.


Modifications

One useful modification would be to write additional CATALOG read subroutines that could read Pascal, CP/M, Flex or OS9 directories. The code is not that complex so that changing the tracks/sectors and bytes read should be straightforward. If you need more information — the file size, disk volume number, free space remaining or other parameters — it can be read from the disk, stored and printed. Those of you with a 16K (or larger) RAM card can increase the buffer size by expanding into the additional RAM.

AIM + POWER

from **COMPUTECH**

All prices
Postpaid
(Continental
U.S. —
otherwise
\$2 credit)

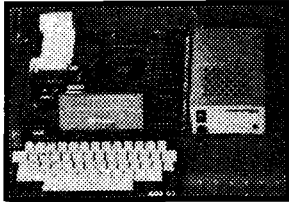

Check the
**outstanding
documentation**
supplied with
AIM65

Top quality power supply designed to Rockwell's specs for fully populated AIM 65 — includes overvoltage protection, transient suppression, metal case and power cable:

PSSBC-A (5V 2A Reg; 24V .5A Avg, 2.5A Peak, Unreg) ...**\$64.95**
Same but an extra AMP at 5 volts to drive your extra boards:
PSSBC-3 (5V 3A Reg; 24V .5A Avg, 2.5A Peak, unreg) ...**\$74.95**


The professional's choice in microcomputers:

AIM65/1K RAM	\$429.95	BASIC (2 ROMS)	\$59.95
AIM65/4K RAM	\$464.95	ASSEMBLER (1 ROM) . . .	\$32.95
		FORTH (2 ROMS)	\$59.95


SAVE EVEN MORE ON COMBINATIONS

AIM65/1K + PSSBC-A . **\$479.95** AIM65/4K + PSSBC-3 . **\$524.95**
We gladly quote on all AIM65/40 and RM65 items as well.

ORDERS: (714) 369-1084



P.O. Box 20054 • Riverside, CA 92516
California residents add 6% sales tax



You may contact Charles Hill at 226
Park St., Brandon, Manitoba Canada
R7A 5M3

**Master Directory
requires:**

Apple II with DOS

```

1 * MASTER DIRECTORY
* BY CHARLES HILL
* MICRO INK
* AMHERST, NH 03031
*
* ZERO PAGE DEFINITIONS
BUFFER EPZ $EE ; DIRECTORY BUFFER
; POINTER
WINTOP EPZ $22 ; TOP OF TEXT WINDOW
PROMPT EPZ $33 ; INPUT PROMPT
MAX EPZ $F0 ; SORT VARIABLES
J EPZ $F2 ;
K EPZ $F4 ;
HFTR EPZ $F6 ;
VPTR EPZ $F8 ;
H EPZ $FA ;
V EPZ $FC ;
FLDPOS EPZ $EA ; FIELD POSITION TABLE
(1,2,3) FOR SORT

IDBUFR EPZ $FE ; DISK ID BUFFER
; POINTER
CV EPZ $25 ; VERTICAL CURSOR POS.
CH EPZ $24 ; HORIZONTAL CURSOR
; POS.
NUMIDS EPZ $F0 ; NUMBER OF DISK ID'S
FLDPTR EPZ $E9 ; POINTER TO FLDPOS
; TABLE
MAXMY EPZ $E8 ; MAXIMUM Y VALUE
COUNT EPZ $F0 ; NUMBER OF NAMES
; USED BY PRINT
NUMLINES EPZ $F2 ; # OF LINES PRINTED
PRINTFLD EPZ $EA ; TABLE OF PRINT
; FIELDS
PRNTBUF EPZ $F4 ; TEXT POINTER
HIMEM EPZ $E6
*
* ROM AND DOS DEFINITIONS
*
CRQUT EQU $FD8E ; CARRIAGE RETURN
RDKEY EQU $FD0C ; GET A KEYPRESS
HOME EQU $FC58 ; GUESS WHAT?
GETLNZ EQU $FD67 ; GET INPUT LINE
COUT EQU $FD6D ; PRINT CHAR. INA REG.
RDSCTR EQU $B011 ; READ A DISK SECTOR
DIRIDX EQU $B39C ; INDEX INTO DIRECTORY
DIRBGN EQU $B4C6 ; START OF DIRECTORY
; ENTRIES
RDVTOC EQU $AFF7 ; READ VTOC ROUTINE
NXTDNE EQU $B230 ; ROUTINE TO ADVANCE
; DIRECTORY INDEX
DOSNAME EQU $AA75 ; NAME BUFFER FOR DOS
VOL EQU $AA66 ; PARAMETERS FOR DOS
DRIVE EQU $AA68
SLOT EQU $AA6A
LEN EQU $AA6C
ADDR EQU $AA72
KYWRDFND EQU $AA65 ; KEYWORDS FOUND BYTE

```

```

DOCDMND EQU $A186 ; ROUTINE TO DO DOS
; COMMAND
CMND EQU $AA5F ; DOS COMMAND
BLANKNAM EQU $A095 ; ROUTINE TO BLANK
; NAME BUFFER
VTAB EQU $FC24 ; VTOC ROUTINE
ROMULT EQU $E2B8 ; ROM MULTIPLY ROUTINE
MAXFILES EQU $A258 ; MAXFILES ROUTINE
SETINO EQU $FE89 ; DG IN#0
SETOUTO EQU $FE93 ; DO PR#0
SETOUT EQU $FE95 ; DO PR#SLOT
*
* WORKING DEFINITIONS
*
IDBUFR EQU $0EFO ; DISK ID BUFFER
NUMBER EQU IDBUFR-$02 ; NUMBER OF ENTRIES
; IN BUFFERS
NAMEBUFR EQU IDBUFR+$0200 ; FILE NAMES BUFFER
INBUFR EQU $0200 ; INPUT BUFFER
MAXLINE EQU 65 ; NUMBER OF LINES PER
; PRINTED PAGE
*
* MAIN PROGRAM
*
JSR MENU ; SET UP THE SCREEN
SEC ; SET HIMEM TO POINT
; BELOW ACTUAL HIMEM
LDA $73
SBC #$20
STA HIMEM
LDA $74
SBC #0
STA HIMEM+1
LDA #")"
STA PROMPT
COMMAND JSR HOME ; DETERMINE DESIRED
; ROUTINE AND JUMP TO
; IT
LDA #")"
JSR COUT
JSR RDKEY
CMP #1"
BNE >1
JMP SCANDISK
*1 CMP #2"
BNE >2
JMP SAVECAT
*2 CMP #3"
BNE >3
JMP READCAT
*3 CMP #4"
BNE >4
JMP SORTCAT
*4 CMP #5"
BNE >5
JMP PRINTCAT
*5 CMP #6"
BNE COMMAND
LDA #$00 ; SET FULL WINDOW
STA WINTOP
JSR HOME
LDA #$A5
STA $A851 ; RESTORE NORMAL DOS
LDA #$A2
STA $9EE0
LDA #$20
STA $A6EF
LDA #$51
STA $A6F0
LDA #$A8
STA $A6F1
JMP $03D3 ; COLD-START DOS
*
* ROUTINE TO READ CATALOG
*
SCANDISK LDA #$31 ; INV "1"
; STA $502

```

```

LDA #0
STA NUMBER ;ZERO NUMBER OF
STA NUMBER+1 ;FILE NAMES
LDA #NAMEBUFR
STA BUFFER ;SET BUFFER POINTERS
LDA /NAMEBUFR
STA BUFFER+1
LDA #FF
STA NUMIDS ;ZERO NUMBER OF DISK IDS
LDA #A0 ;BLANK DISK ID BUFFER
LDY #0
^1 STA IDBUFR,Y
STA IDBUFR+$0100,Y
INY
BNE <1
NEXTDISK JSR HOME
JSR GETID ;GET ID FOR DISK
BCS >1 ;BRANCH IF ID ENTERED
^4 LDA #B1 ;NORM "1"
STA $502
JMP COMMAND
^1 JSR RDVTOC ;READ VTDC
CLC ;SET TO READ FIRST SECTOR
RDSECT JSR RDSCTR ;AND READ IT
BCS NEXTDISK ;CHECK FOR END OF DIRECTORY
SECTORS

NXTNAM LDX #00
STX DIRIDX ;RESET DIR. INDEX
LDA DIRBGN,X ;GET FIRST BYTE OF THIS ENTRY
BEQ NEXTDISK ;CHECK FOR END OF DIRECTORY
BMI NXTENT ;CHECK FOR DELETED ENTRY
LDY #00
LDA NUMIDS ;GET DISK ID NUMBER
STA (BUFFER),Y ;STORE IT WITH NAME
INX ;ADVANCE POINTER TO FILE
TYPE
^1 INX ;MOVE FILE TYPE AND NAME
INY
LDA DIRBGN,X
STA (BUFFER),Y
CPY #1F
BNE <1
INC NUMBER ;INCREMENT NUMBER OF
ENTRIES
BNE >2
^2 INC NUMBER+1
CLC ;INCREMENT BUFFER
POINTERS

LDA BUFFER
ADC #20
STA BUFFER
BCS >1
INC BUFFER+1
^1 LDA BUFFER ;CHECK FOR OUT OF
MEMORY

CMP HMEM
LDA BUFFER+1
SBC HMEM+1
BLT NXTENT
LDX #OUTBL ;YES WE ARE
LDY /OUTBL
JSR PRINTMES
JSR RDKEY
JMP <4
OUTBL HEX 8787
ASC "OUT OF MEMORY!"
HEX 878D00
NXTENT JSR NXTONE ;POINT TO NEXT FILE
ENTRY
BCS RDSECT ;NO MORE SO READ NEXT
SECTOR
BCC NXTNAM ;MORE IN THIS SECTOR

*
* ROUTINE TO GET DISK ID
*
GETID LDX #IDTBL ;REQUEST ID

```

```

LDY /IDTBL
JSR PRINTMES
JSR GETLNZ ;GET ID
INC NUMIDS ;INC NUMBER OF IDS
LDA NUMIDS ;POINT TO FREE AREA
JSR POINTID
LDY #0 ;MOVE DISK ID TO
IT'S BUFFER
^2 LDA INBUFR,Y
CMP #8D ;TEST FOR END OF LINE
BEQ >1
STA (IDBUFR),Y
INY
CPY #08 ;TEST FOR END OF ID
BNE <2
^1 CPY #01 ;TEST FOR NO ID (RTN
FIRST CHAR.)

RTS
IDTBL ASC "INSERT DISK, AND ENTER ID"
HEX 8D
ASC "JUST PRESS RETURN TO EXIT"
HEX 8D00

*
* ROUTINE TO SAVE CATALOG TO DISK
*
SAVECAT LDA #32 ;INV "2"
STA $582
JSR HOME
JSR GETNAME ;GET FILENAME
TXA
BEQ >2
LDA #43 ;BSAVE COMMAND
STA COMND
LDA #09 ;SET KEYWORDS FOUND
BITS TO
STA KYWRDFND ;SHOW 'A' AND 'L'
PARAMETERS

LDX NUMBER ;SET LENGTH PARAMETER
LDY NUMBER+1 ;GET LENGTH OF NAME
AREA

JSR MULT
CLC
TXA
ADC #03 ;ADD LENGTH OF
NUMBER OF ENTRIES
STA LEN ;AND DISK ID AREA
TYA
ADC #02
STA LEN+1
JSR DOCOMND ;AND DO IT!
LDA #B2 ;NORM "2"
STA $582
JMP COMMAND

*
* ROUTINE TO READ CATALOG FILE
*
READCAT LDA #33 ;INV "3"
STA $602
JSR HOME
JSR GETNAME ;GET FILENAME
TXA
BEQ >1
LDA #0
STA KYWRDFND
LDA #50 ; BLOAD COMMAND
STA COMND
JSR DOCOMND ;DO IT
LDA #B3 ;NORM "3"
STA $602
JMP COMMAND

*
* ROUTINE TO HANDLE DISK ERRORS
*
DISKERR LDX #ERRMESS ;PRINT MESSAGE
LDY /ERRMESS
JSR PRINTMES
JSR RDKEY ;WAIT FOR KEYPRESS

```

(Continued on page 55)

PRO-MODEM 1200



It's about time.

Time for your computer to make the telephone connection – with an intelligent, full 212A 300/1200 baud modem – with a real time clock/calendar – and with the capability to expand into a complete telecommunications system. It's time for PRO-MODEM 1200. Much more than just a phone modem.

When you're on-line, time is money. PRO-MODEM telecommunication systems help you save. By monitoring the duration and cost of your phone calls. And by sending and receiving messages, unattended, at preset times when the rates are lower. . . with or without your computer.


Compare the \$495 PRO-MODEM 1200 with any other modem on the market. For example, you'd have to buy both the Hayes Smartmodem 1200 plus their Chronograph for about \$950 to get a modem with time base.

PRO-MODEM 1200 is easy to use. A convenient "Help" command displays the Menu of operating command choices for quick reference whenever there's a question about what to do next. Extensive internal and remote self-diagnostics assure that the system is operating properly. Some of the other standard features include Auto Answer, Touch Tone and Pulse Dialing, and Programmable Intelligent Dialing.

PRO-MODEM does more. It lets you build a full telecommunications system with features like Auto Dialer, Incoming and Outgoing Message Buffering, Business/Personal Phone Directory, Programmable Operating Instructions, a 12-Character Alpha-Numeric Time and Message Display, and versatile PRO-COM Software. PRO-MODEM commands are Hayes compatible so you can use most existing telecommunications software without modification.

There's much more to the PRO-MODEM story. See your local dealer for complete details. He'll show you how to save time. And money.

Prometheus Products, Inc., 45277 Fremont Blvd., Fremont CA 94538, (415) 490-2370

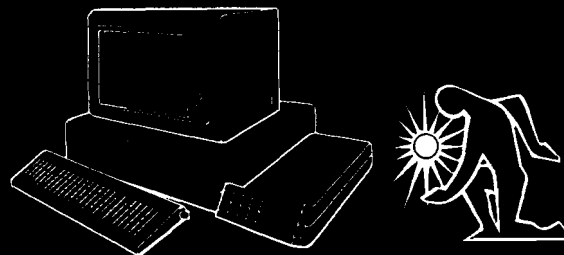

PROMETHEUS

COMPUTER MAIL ORDER



COLOR COMPUTERS
 ACE 1000, ACE 1200, ACE 1200 OMS,
 ACE 1100 PRO PACK, ACE 1000, ACE
 10 Drive & Controller, 80 Column Card,
 ACECalc & ACEWriter.....CALL
APPLE IIe STARTER PACK
 64K Apple IIe, Disk Drive and Controller,
 80 Column Card & Monitor III...
 COMPLETE\$1599.00

MICRO-SCI
 Apple & Franklin
 A2\$219.00
 A40\$299.00
 A70\$319.00
 C2 Controller\$79.00
 C47 Controller\$89.00

RANA
 Elite I (Apple/Franklin)\$279.00
 Elite II (Apple/Franklin)\$319.00
 Elite III (Apple/Franklin)\$569.00

VISICORP
 FOR APPLE, IBM & FRANKLIN
 Visidex\$189.00
 Visifile\$189.00
 Visiplot\$159.00
 Visiterm\$89.00
 Visitrend/Plot\$229.00
 VisiSchedule\$229.00
 Desktop Plan\$189.00
 Visicalc 4 (IBM)\$169.00
 Visicalc Advanced IIe\$309.00
 Stretch Calc\$89.00
 Visicorp prices for IBM may vary slightly.

LJK
 Letter Perfect Apple\$109.00
 Data Perfect Apple\$75.00

AXLON
 Apple/Franklin 128K Ram\$299.00
 Apple/Franklin Ram Disk\$729.00

MPC
 Buddisk (128K Non Volatile)\$649.00

WICO
 Joystick\$21.95
 Famous Red Ball\$23.95
 Power Grip\$21.95
 Three-Way Deluxe\$22.95
 Atari/VIC Trackball\$34.95
 Apple Trackball\$59.95

KRAFT
 Atari Single Fire\$13.00
 Atari Switch Hitter\$16.00
 Apple Joystick\$44.00
 Apple Paddles\$39.00

commodore



CBM 8032
 \$599
CBM64 ...\$219
VIC 20\$89

CALL ON
 Executive 64 Portable


1520 Color Printer/Plotter\$169.00
 1525 80 Column Printer\$219.00
 1530 Datasette\$69.00
 1541 Single Disk Drive\$249.00
 1600 VIC Modem\$59.00
 1650 AD/AA Modem\$89.00
 1702 14" Color Monitor\$249.00
 Pet 64\$569.00
 Pet 4032\$599.00
 CBM 8032\$599.00
 Super Pet\$999.00
 B128-80\$769.00
 2031\$299.00
 8050\$949.00
 8250\$1199.00
 9060\$1999.00
 9090\$2199.00
 4023\$379.00
 6400\$1399.00
 64K Upgrade\$269.00
 Spell Master\$149.00
 Z-Ram\$549.00
 Silicon Office\$749.00
 The Manager\$209.00
 Soft Rom\$129.00
 JinsamCALL
 CalcResult 64\$139.00
 CodeWriter 64\$75.00
 VisiCalc\$169.00

PROFESSIONAL SOFTWARE
 Word Pro 2 Plus\$159.00
 Word Pro 3 Plus\$189.00
 Word Pro 4 Plus\$279.00
 Word Pro 5 Plus\$279.00
 InfoPro\$179.00
 Administrator\$399.00
 Power\$79.00
 Word Pro 64 Plus\$65.00

CARDCO
 for VIC 20/64
 Light Pen\$32.00
 Cassette Interface\$29.00
 Parallel Printer Interface\$69.00
 3 Slot Expans. Interface (20)\$32.00
 6 Slot Expans. Interface (20)\$79.00



HOME COMPUTERS

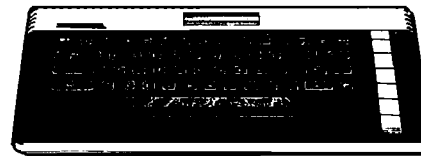

ATARI 600XL.....\$149
ATARI 800XL.....\$269
ATARI 1200XLCALL
ATARI 400CALL
ATARI 800CALL

1010 Program Recorder\$74.00
 1020 40 Col. Printer/Plotter\$249.00
 1025 80 Col. Printer\$449.00
 1027 Letter Quality Printer\$299.00
 1050 Disk Drive\$379.00
 1030 Direct Connect ModemCALL
 CX30 Paddles\$12.00
 CX40 Joystick\$8.00
 CX42 Remote JoystickCALL
 CX77 Touch Tablet\$69.00
 CX80 Trak Ball\$49.00
 CX85 Keypad\$105.00
 CX418 Home Manager\$69.00
 CX488 Communicator II\$229.00
 KX7098 Atari Accountant\$209.00
 KX7101 Entertainer\$69.00
 KX7102 Arcade Champ\$75.00

ALIEN
 Atari Voice Box\$119.00
 Apple Voice Box\$149.00

MEMORY BOARDS
 Axlon 32K Ram\$59.00
 Axlon 48K Ram\$99.00
 Axlon 128K Ram\$299.00
 Intec 32K Board\$59.00
 Intec 48K Board\$85.00
 Intec 64K Board (400 only)\$99.00
 Intec Real Time Clock\$39.00

DISK & CART HOLDERS
 Flip-n-File 10\$4.00
 Flip-n-File 50\$19.00
 Flip-n-File 400/800 Cart\$19.00



AT 88-S1\$329.00
 AT 88-A2\$269.00
 AT 88-S2\$569.00
 AT 88-S1 PD\$469.00
 AT 88-DDA\$145.00
 RFD 40-S1\$449.00
 RFD 40-A1\$279.00
 RFD 40-S2\$729.00
 RFD 44-S1\$539.00
 RFD 44-S2\$889.00
 TX 99-S1 (Texas Inst.)\$279.00

RANA
 1000 Atari Disk Drive\$319.00

TRAX
 AT-D2CALL

FLOPPY DISKS
MAXELL
 MD-1\$29.00
 MD-2\$39.00
 FD-1(8")\$40.00
 FD-2(8" DS DD)\$50.00

ELEPHANT
 5 1/4" SS SD\$18.50
 5 1/4" SS DD\$24.95
 5 1/4" DS DD\$29.95

VERBATUM
 5 1/4" SS DD\$26.00
 5 1/4" DS DD\$36.00

HEAD
 Disk Head Cleaner\$14.95

C.M.O. TOP 80

APPLE/FRANKLIN
 1. Choplifter\$27.00
 2. Bank Street Writer\$55.00
 3. PFS: File\$89.00
 4. Visicalc\$179.00
 5. Home Accountant\$55.00
 6. Zaxxon\$29.00
 7. Most Amazing Thing\$28.00
 8. Visifile\$189.00
 9. Fathoms 40\$19.00
 10. Deadline\$35.00
 11. PFS: Report\$89.00
 12. Zork III\$29.00
 13. Frogger\$24.00
 14. Facemaker\$24.00
 15. Snooper Troops #1\$32.00
 16. Delta Drawing\$35.00
 17. Castle Wolfenstine\$24.00
 18. Wayout\$29.00
 19. Canyon Climber\$19.00
 20. Bandits\$26.00

CBM 64
 1. Word Pro 64\$65.00
 2. Jumpman\$29.00
 3. Gorf (20/64)\$14.95
 4. Microspec Data Base 64\$69.00
 5. Logo 64\$39.00
 6. Microspec Gen. Ledger 64\$79.00
 7. Zork III\$29.00
 8. Frogger (64)\$23.00
 9. Quick Brown Fox (20/64)\$49.00
 10. Shamus\$29.00
 11. Deadline\$29.00
 12. Assembler 64\$14.95
 13. Zork II\$29.00
 14. 3-D Man\$14.00
 15. Protector\$32.00
 16. Starcross\$29.00
 17. Easy Mail 64\$14.95
 18. Grave Robber\$11.00
 19. Wall Street\$19.00
 20. Trash Man\$32.00

ATARI
 1. Donkey Kong\$39.00
 2. Zaxxon\$29.00
 3. E.T. Phone Home\$39.00
 4. Miner 2049er\$35.00
 5. Dig Dug\$33.00
 6. Choplifter\$29.00
 7. Donkey Kong, Jr\$39.00
 8. Canyon Climber\$25.00
 9. Snooper Troops #2\$34.00
 10. Word Wizard\$59.00
 11. Picnic Paranoia\$34.00
 12. Jumpman\$29.00
 13. Shamus\$34.00
 14. Letter Perfect\$109.00
 15. File Manager 800\$69.00
 16. Preppie\$24.00
 17. Astro Chase\$25.00
 18. Blade/Black Hole\$27.00
 19. Pac Man\$33.00
 20. Baja Buggies\$25.00

21. Crush, Crumble & Chomp\$24.00
 22. Wayout\$27.00
 23. Zork II\$29.00
 24. Visicalc\$159.00
 25. Atari Writer\$49.00
 26. Three Little Pigs\$25.00
 27. Upper Reaches of Apsahai\$16.00
 28. Starbowl Football\$24.95
 29. Drelbs\$26.00
 30. Protector\$34.00
 31. Frogger\$25.00
 32. Lunar Leeper\$24.00
 33. Wizard of Wor\$34.00
 34. Kindercomp\$21.00
 35. Moon Shuttle\$22.00
 36. Home Accountant\$55.00
 37. Temple of Apsahai\$29.00
 38. Spell Wizard\$39.00
 39. Nautilus\$26.00
 40. O'Riley's Mine\$22.00

= WEST = = CANADA = = EAST =

1-800-648-3311 1-800-268-4559 1-800-233-8950

In NV call (702)588-5654, Dept. 1215
 P.O. Box 6689, Stateline, NV 89449
 Order Status #: 588-5654

In Toronto call (416)828-0866, Dept. 1215
 2505 Dunwin Ct., Unit 1B,
 Mississauga, Ontario, Canada L5L1T1
 Order Status #: 828-0866

In PA call (717)327-9575, Dept. 1215
 477 E. Third St. Williamsport, PA 17701
 Order Status #: 327-9575

CANADIAN ORDERS: All prices are subject to shipping, tax and currency exchange fluctuations. Call for exact pricing in Canada.
INTERNATIONAL ORDERS: All shipments outside the Continental United States must be pre-paid by certified check only. Include 3% (minimum \$5.00) shipping and handling. **EDUCATIONAL DISCOUNTS:** Additional discounts are available to qualified Educational Institutions.
 APO & FPO: Add 3% (minimum \$5.00) shipping and handling.




MAGIC MEMORY

Will Remember Everything For You

(If you want it to)

Imagine a system that would record all the wonderful, valuable information you have assimilated onto a single tiny disk. (No more scattered bits of paper, business cards, etc.) Imagine the same system giving you a typed sheet you could put into a notebook or print out for a party and instantly change, or add to, at a moments notice. Imagine cross-referencing to suit both your business needs and personal desires so that all your data was organized into one little black book! On top of all this — imagine having fun putting it together.

MAGIC MEMORY™ is built for the computer rookie. Everyone can relate to **MAGIC MEMORY™** because its form is familiar. It looks like an address book but its not. Its *more*. Like the address book, **MAGIC MEMORY™** presents an A thru Z index tabulation on the right edge of the video display. The user simply selects a tab and the *book* is opened to the proper page(s). A second set of tabs are available that can be labeled by the user (i.e., companies one deals with, birthdays, lists, wines, shops, etc.) Yet **MAGIC MEMORY™** is

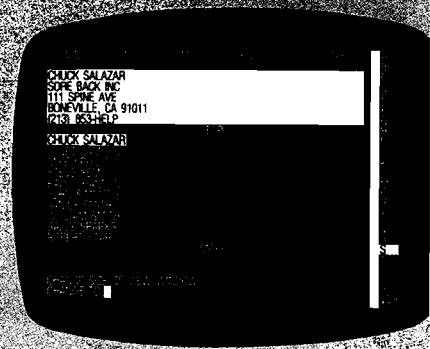


or any of its special sections.

MAGIC MEMORY'S data presentation screen will instantly adapt to any type of information you may want to store. It is only limited to your imagination and your needs.

MAGIC MEMORY™ is designed to operate on an APPLE II/e and still remain totally compatible with APPLE I. The system will operate in 40 columns or 80 columns. You may also use the 70-column display that requires no additional hardware.

MAGIC MEMORY™ retails for \$99.95. Call 213/985-5763. Use your imagination to outwit your organizational woes!


MAGIC MEMORY™ is a trademark of ARTSCI, INC.

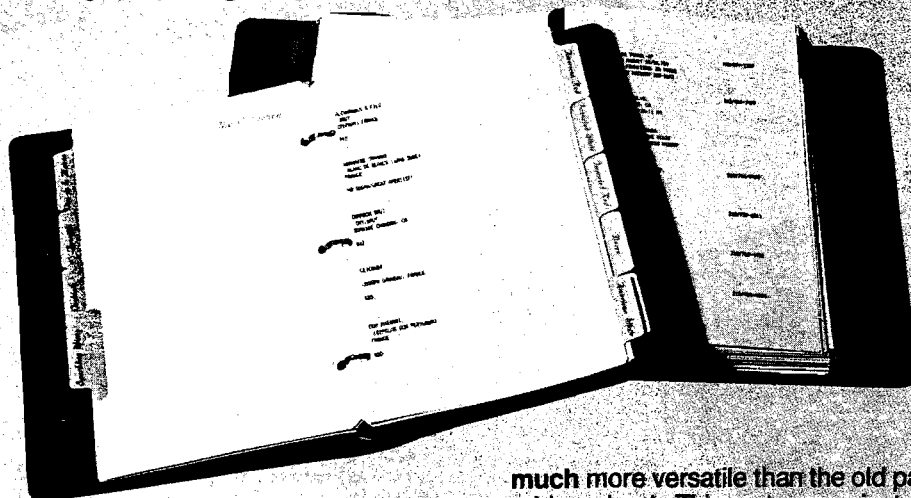

"Imagine" no more. ARTSCI, INC. proudly announces **MAGIC MEMORY™**, the complete advanced database system. **MAGIC MEMORY** is made to simplify the information storage process.


The typical first-time computer user has no *human* experience that will help him to relate to a *computer's* methods of handling information. Therefore, his learning ability is hampered and remains so for many hours of use, UNLESS the computer has been designed to run simply.

MAGIC MEMORY™ is much more versatile than the old paper address book. This system can instantly add or delete information, sort alphabetically, and transfer data to other locations in the book.

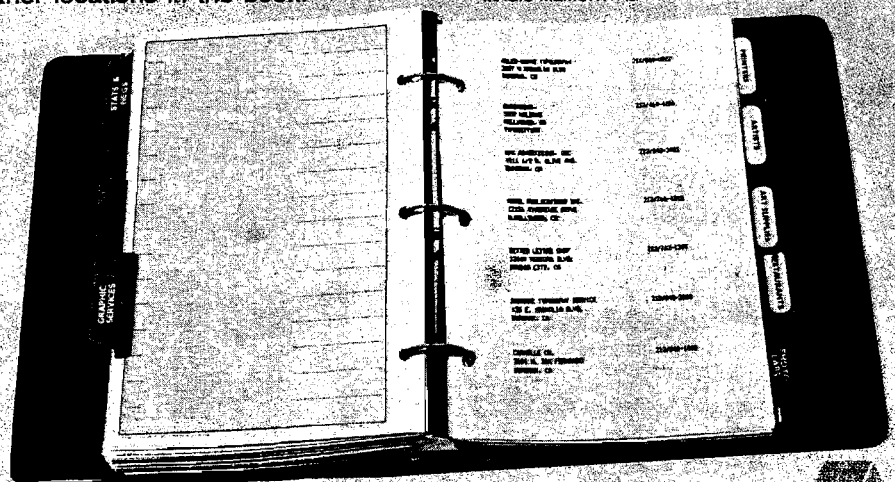

One of the features in the print section of **MAGIC MEMORY™** is the ability to print out any or all of the address book,

213/985-5763
5547 Satsuma Avenue
North Hollywood, Ca 91601

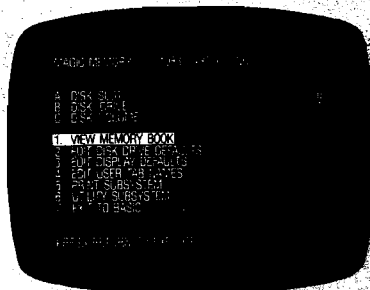

```

LDA $602          ;CHECK TO SEE IF WE
                  WERE
CMP #33          ;READING OR WRITING
BEQ <1          ;AND
BNE <2          ;RETURN
ERRMESS ASC "DISK ERROR, PRESS ANY KEY TO
              CONTINUE"
              HEX 87878D00
*
* GET DISK AND FILENAME
*
GETNAME LDX #GETMESS
        LDY /GETMESS
        JSR PRINTMES
^2      JSR GETLNZ          ;GET FILENAME
        TXA
        BEQ >3
        JSR BLANKNAM      ;BLANK FILENAME
                          BUFFER
        LDY #00          ;MOVE FILENAME TO
                          DOS NAME BUFFER
^1      LDA INBUFF,Y
        CMP #8D
        BEQ SETPARMS
        STA DOSNAME,Y
        INY
        BNE <1
        SETPARMS LDA #0          ;SET PARAMETERS
                STA VOL
                LDA #6
                STA SLOT
                LDA #1
                STA DRIVE
                LDA #NUMBER      ;SET STARTING ADDRESS
                STA ADDR
                LDA /NUMBER
                STA ADDR+1
        RTS
^3      GETMESS ASC "INSERT DISK, AND ENTER FILENAME"
        HEX 8D8D00
*
*
* THIS IS WHERE THE SORT ROUTINE
* GOES. WILL BE IN NEXT MONTH
SORTCAT EQU *
        RTS
*
*
MULT    STY $65          ;MULTIPLY ROUTINE
        STX $64          ;$64,$65 * $AD,$AE
        LDA #$20
        STA $AD
        LDA #$00
        STA $AE
        JMP ROMULT
*
*
* THIS IS WHERE THE PRINTCAT ROUTINE
* GOES. ALSO WILL BE IN NEXT MONTH.
PRINTCAT EQU *
        RTS
*
*
* TEXT PRINTER
*
PRINTMES STX PRNTBUF
         STY PRNTBUF+1
         LDY #00
^1      LDA (PRNTBUF),Y
         BEQ >2
         JSR COUT
         INY
         BNE <1
^2      RTS
;
POINTID STA IDBUFFER      ;GIVEN A AS AN INDEX
        LDA #00          ;TO THE ID TABLE

```

```

STA IDBUFFER+1    ;POINT THE THE
                  CORECT PLACE
^1      LDX #00          ;BY MULTIPLYING BY 8
        ASL IDBUFFER
        ROL IDBUFFER+1
        INX
        CPX #03
        BNE <1
        CLC
        LDA IDBUFFER
        ADC #IDBUFF
        STA IDBUFFER
        LDA IDBUFFER+1
        ADC /IDBUFR
        STA IDBUFFER+1
        RTS
;
MENU      JSR HOME          ;PRINT THE MENU BOX
        LDA #1
        JSR MAXFILES      ;SET MAXFILES = 1
        LDA #60
        STA $A851         ;PATCH DOS
        STA $9EE0         ;" "
        LDA #4C
        STA $A6EF
        LDA #DISKERR
        STA $A6F0
        LDA /DISKERR
        STA $A6F1
        JSR SETINO
        JSR SETOUTO
        LDX #MENUTEXT
        LDY /MENUTEXT
        JSR PRINTMES
        BOX LDA #00          ;FRAME THE MENU
        STA CV
        JSR VTAB
        LDY #0
        STY CH
        LDA #"#""
^1      LDX #38
        JSR COUT
        DEX
        BPL <1
^1      LDX #0B
        LDY #39
        STY CH
        JSR COUT
        JSR COUT
        DEX
        BPL <1
^1      LDX #38
        JSR COUT
        DEX
        BPL <1
        LDA #0C          ;SET THE TEXT WINDOW
                          DOWN TO
        STA WINTOP        ;PROTECT THE MENU BOX
        RTS
        MENUTEXT HEX 8D8D
        ASC " 1) CATALOG DISKS"
        HEX 8D
        ASC " 2) SAVE CATALOG "
        ASC "ENTER THE NUMBER"
        HEX 8D
        ASC " 3) READ CATALOG"
        HEX 8D
        ASC " 4) SORT CATALOG "
        ASC "OF YOUR CHOICE."
        HEX 8D
        ASC " 5) PRINT CATALOG"
        HEX 8D
        ASC " 6) END"
        HEX 8D00
        FLDLEN HEX 0B          ;DISK ID LENGTH
                HEX 01          ;FILE TYPE LENGTH
                HEX 1E          ;FILE NAME LENGTH
        END

```

MICRO™

Apple Slices



by Phil Daley

Disk Dump Program

Here is a program to dump any disk file to screen, printer or whatever. The program asks for what type of disk you have, and then asks for the filename. If you don't know the name, a RETURN will present the possibilities. The dump can either be HEX or straight ASCII. If the file is not straight text, your printer will probably go through a few contortions in the ASCII mode. The program currently has subroutines for DOS and Pascal. I will add subroutines for CP/M, Flex and OS-9 soon.

Listing 1


```

5 DIM A(150),B(150):BU = 16384:GOSUB 9000
10 TEXT:HOME:VTAB 7:PRINT "DISK TYPE":
  PRINT "1. DOS 3.3"A:PRINT "2. PASCAL"
  A:PRINT "3. CPM":PRINT "4. FLEX":PRINT
  "5. OS-9"P:PRINT:PRINT "CHOOSE: ":GET
  A$:A = VAL(A$):IF A < 1 OR A > 5 THEN
  10
81 PRINT:PRINT "SLOT FOR OUTPUT? ":GET
  A$:SL = VAL(A$):IF SL < 0 OR SL > 7 THEN
  81
85 PRINT:PRINT "HEX OR ASCII?":GET HE$:
  HE = 0:IF HE$ = "H" THEN HE = 1
90 TEXT:HOME:PRINT "INSERT DISK":PRINT
  :PRINT "FILENAME?":PRINT:PRINT "<RE
  TURN> FOR CATALOG ":INPUT B$:A$ = "":C
  F = 0:IF LEN(B$) = 0 THEN CF = 1:GOTO
  110
105 A$ = B$
110 HOME:VTAB 7:PRINT "READING CATALOG..
  ..":ON A GOSUB 1000,2000,3000,4000,500
  0:INPUT "PRESS <RETURN>":A$:GOTO 10:END

900 HI = INT(H / 16):LO = H - HI * 16:D =
  HI:GOSUB 950:A$ = H$:D = LO:GOSUB 950
  :A$ = A$ + H$ + " ":RETURN
950 IF D < 10 THEN H$ = STR$(D):RETURN
960 H$ = CHR$(D + 55):RETURN
1000 FOR I = 1 TO LEN(B$):A$ = A$ + CHR$(
  (ASC(MID$(B$,I,1)) + 128)):NEXT:POKE
  780,17:POKE 785,64:FOR C = 15 TO 2 STEP
  - 1:POKE 781,C:CALL 768:FOR Y = 0 TO
  6:E$ = "":EN = 16395 + Y * 35:Q = PEEK
  (EN):IF Q = 0 THEN C = 2:Y = 6:GOTO 1
  070
  
```

```

1030 FOR X = EN + 3 TO EN + 32:E$ = E$ + CHR$(
  (PEEK(X)):NEXT:IF CF THEN PRINT E
  $:GOTO 1070
1065 IF A$ = LEFT$(E$,LEN(A$)) THEN 110
  0
1070 NEXT:NEXT
1085 IF CF THEN RETURN
1090 FLASH:PRINT:PRINT "NOT FOUND":NORMAL
  :RETURN
1100 POKE 780,PEEK(EN):POKE 781,PEEK(E
  N + 1):CALL 768:J = 0:FOR I = 0 TO 12
  1
1135 IF I > 121 THEN 1170
1140 A = I * 2 + 12 + BU:IF PEEK(A) = 0 THEN
  I = I + 1:GOTO 1135
1155 J = J + 1:A(J) = PEEK(A):B(J) = PEEK
  (A + 1)
1170 NEXT:U = J:PRINT:PRINT CHR$(4)"P
  R#":SL:FOR J = 1 TO U:POKE 780,A(J):POKE
  781,B(J):CALL 768:FOR I = 0 TO 255:A =
  BU + I:IF HE THEN H = PEEK(A):GOSUB
  900:PRINT A$:GOTO 1230
1220 PRINT CHR$(PEEK(A)):
1230 NEXT:NEXT:PRINT:PRINT CHR$(4)"
  PR#":RETURN
2000 POKE 780,0:FOR C = 11 TO 4 STEP - 2:
  POKE 781,C:POKE 785,64:CALL 768:POKE
  781,C - 1:POKE 785,65:CALL 768:EN = B
  U + 26
2030 SB = PEEK(EN) + PEEK(EN + 1) * 256:
  EB = PEEK(EN + 2) + PEEK(EN + 3) *
  256:LG = PEEK(EN + 6):E$ = "":IF LG =
  0 THEN 2100
2060 FOR I = EN + 7 TO EN + 7 + LG - 1:E$ =
  E$ + CHR$(PEEK(I)):NEXT:IF CF THEN
  PRINT E$:GOTO 2100
2090 IF A$ = E$ THEN 2200
2100 EN = EN + 26:IF EN < BU + 512 - 26 THEN
  2030
2110 NEXT:GOTO 1085
2200 PRINT:PRINT CHR$(4)"PR#":T = INT
  (SB / 8):S = SB - T * 8:T1 = INT(EB /
  8):S1 = EB - T1 * 8:S2 = S1:T1 = T1 - 1
  :FOR I = T TO T1:S3 = S1:IF T1 > I THEN
  S3 = 7
2250 FOR J = S2 TO S3:POKE 785,64:POKE 78
  0,I:POKE 781,TS(0,J):CALL 768:GOSUB
  2470:POKE 780,I:POKE 781,TS(1,J):CALL
  768:GOSUB 2470:NEXT:S2 = 0:NEXT:PRINT
  :PRINT CHR$(4)"PR#":RETURN
2470 FOR K = 0 TO 255:A = BU + K:IF HE THEN
  H = PEEK(A):GOSUB 900:PRINT A$:GOTO
  2490
2485 PRINT CHR$(PEEK(A)):
2490 NEXT:RETURN
9000 FOR I = 768 TO 805
9010 READ A:POKE I,A:NEXT
9011 FOR I = 0 TO 7:FOR J = 0 TO 1:READ T
  S(J,I):NEXT J,I
9015 RETURN
9020 DATA 169,3,160,8,32,217,3,96,1,96
9030 DATA 1,0,17,15,30,3,0,64,0,0
9040 DATA 1,0,254,96,1,0,0,0,0,0
9050 DATA 0,1,239,216,0,0,0,0
9060 DATA 0,14,13,12,11,10,9,8,7,6,5,4,3,2,
  1,15
  
```


MICROTM**Apple Reviews**

Product Name: **Ultra ROM Board/Editor**
 Equip. req'd: Apple II
 Price: \$190.00
 Manufacturer: Hollywood Hardware
 6842 Valjean Ave.
 Van Nuys, CA 91406

Description: A plug-in ROM board with Neil Konzen's GPLC included with 25 ampersand utilities for an on-line editor/utility package. The Global Program Line Editor is a handy set of line editing commands and is available at any time, even with a program already loaded. The utilities include switching in other "&" commands, BLOAD information, control character display, free sectors, line finder, HIMEM and LOMEM settings, graphics screen commands without clearing screen, IF, THEN, ELSE structures, program restore (not new), PRINT USING, memory search, clear end-of-line and -page, help and macro definitions, for single key entry.

Pluses: The program is always waiting to be called. If you forget to load a line editor while working on a program, then you have to save, load the editor and reload the program. With Ultra ROM, a PR# <slot> command will activate the editor, program intact. If you program a lot and haven't used a line editor, get one right away.

Minuses: The "&" additions will only run on a similar system. (A new runtime package is being included for transportability.)

Documentation: A 50-page manual clearly explains how the programs work and how to manage your own vectors.

Skill level required: Some programming experience is necessary for full use.

Reviewer: Phil Daley

Product Name: **Robographics CAD-1**
 Equip. req'd: Apple II
 Price: \$1095.00
 Manufacturer: ROBO Graphics
 125 Pheasant Run, Suite 2B
 Newton, PA 18940

Description: An extremely sophisticated computer-aided graphics and drafting package for the Apple which has functions, speed and accuracy previously available only on expensive CAD systems. The basic system includes 4 disks, manual, interface module (a copy protection device) and a precision controller much more accurate and versatile than a joystick. It has such features as zoom, pan, angle locks, grid locks, scale drawing, move, find, exchange, line color and type, text entry and more. Pictures

can be stored on a library disk with unique picture labeling and retrieval system. Optional equipment includes dot-matrix printer, plotter, color printer, and digitizer.

Pluses: The system is menu driven and easy to become acquainted with. Scale drawing is accurate and easy to do. Zoom works at many levels of nesting, (greater than 1 part in a billion) giving effectively unlimited screen resolution. Picture complexity is only limited by space on disk. This system has to be seen in operation to appreciate its power: especially its ability to produce highly detailed technical drawings.

Minuses: On complex pictures this system can be slow. Redrawing a picture on screen can take several minutes.

Documentation: An easy to read and well indexed manual answers all questions on operation.

Skill level required: Some drafting experience will help get the full benefit of all the sophisticated features.

Reviewer: Phil Daley

Product Name: **Cdex Training for VisiCalc**
 Equip. req'd: Apple II +
 Price: \$49.95
 Manufacturer: Cdex Corporation
 5050 El Camino Real, Suite 200
 Los Altos, CA 94022
 Developer: Dr. Steven C. Brandt

Description: A real bargain. A program to teach you how to use VisiCalc and to use as reference. 2 disks lead step by step in major concepts and commands of VisiCalc; have review questions, hints, positive reinforcements. 3rd disk is quick reference of commands. Manual supplements material with exercises and reference.

Pluses: Very interactive; easy to use. A professional, top-quality package.

Minuses: Disk lessons do not cover all commands, such as window and title commands, but are covered in the reference disk.

Documentation: Well-written, indexed manual contains command reference, examples and exercises.

Skill level required: Anyone interested in learning about VisiCalc. Very little computer experience needed.

Reviewer: Mary Gasiorowski

(Continued on next page)

Reviews (continued)

Product Name: **KoalaPad Touch Tablet**
 Equip. req'd: Apple II
 Price: \$129.95
 Manufacturer: Koala Technologies
 253 Martens Ave.
 Mt. View, CA 94040

Description: A graphics tablet operating from the game controller port with extreme smoothness and precision. The 4 x 4 inch active surface can be activated with finger or stylus. It includes two controller buttons.

Pluses: This product is a great refinement over a joystick. It is much easier and more natural to control than paddles or conventional joysticks. I immediately improved my previous high scores on every game I tried it on. Programming is identical to paddle programming.

Minuses: The *KoalaPad Touch Tablet* does not have self-centering such as a joystick has, and removing your finger from the tablet may result in untimely moves during the progress of a game.

Documentation: A very complete, clear and well written booklet is included with the tablet.

Skill level required: No prior skill needed.

Reviewed: Phil Daley

Product Name: **Personal Finance Manager**
 Equip. req'd: Apple II+, or Apple II with Applesoft Firmware Card or Language System; 48K RAM; and one disk drive (DOS 3.3).
 Price: \$75.00
 Manufacturer: Apple Computer Inc.
 10260 Badley Drive
 Cupertino, CA 95014

Description: A financial program that allows you to budget twenty-four separate accounts which you define. Also available are credit card accounts, and checkbook reconciliation. Defaults make date input and editing a snap. PFM prints out any display you wish and will also move each year's records to another disk for long-term storage.

Pluses: Ample room for the average person, PFM has superb error-handling checks and messages to guide you along. The monthly/yearly updates are helpful and are backed up with a bar graph.


Minuses: You can't track income which would give you a better income vs. expenses picture. Having to continually load modules from disk slows PFM's speed. Not being able to make financial projections will annoy some of you.

Documentation: An attractive and concise booklet is provided with the master disk and backup.

Skill level required: Any person able to turn the computer on and follow directions.

Reviewer: Mike Cherry

MICRO



SOFTWARE ENHANCEMENT SYSTEM, APB-102	\$189.00
W/GPLE, APU-1, FMP, DISK MANUAL, QUICK REFERENCE GUIDE	
APU-2, UTILITY ROM #2	\$35.00
W/RENUMBER, MERGE, HOLD, ETC.	
ROM DEVELOPMENT PKG.	\$99.00
W/DISK INSTRUCTIONS & EMULATION ROM	
A/D, 12 BIT, 16 CHANNEL	\$299.00
W/5 VOLTAGE RANGES, 25 μ SEC CONVERSION	
PRO-1, XTRA-LARGE PROTOTYPE BOARD	\$29.95
UP TO 52 IC's, NUMBERED & LETTERED PINS, HANDY POWER AND GROUND CONNECTIONS, NUMBERED I/O CONNECTIONS	
48 LINE PARALLEL I/O BOARD, CPU-1	\$249.00
25 BUFFERED LINES IN W/FILTERING, 23 BUFFERED LINES OUT, INTERRUPT INPUT	

1 SELLER AT A.P.P.L.E.*

Powerful New Software Enhancement System For Apple II, //e. Triples Programming Speed!

APB-102 Ultra-Rom Board/Editor Includes:

- **Advanced G.P.L.E.* (Global Program Line Editor) in Firmware**
—With Insert, Delete, Find, Tab, Zap, Pack, Restore, End, Etc.
- **Firmware Management Program (FMP) Overlays 32K of ROM in 2K Space**
—Allows jumps and calls between banks—searches for utilities by name
—Recognizes new ROMs and utilities automatically
- **APU-1 with over 25 Language Extensions & Ampersand Utilities**
—If/Then/Else, Print Using, Ultra Fast Search, Damaged Program Recovery
- **Always in the Machine—No Searching for a Disk**
- **Never in the way—No Program RAM used**
—Connect with 4 Keystrokes / Disconnect with 2!

"If you program & haven't used a line editor, get one right away" —MICRO MAGAZINE
 "The most powerful program development tool I have" —ROBERT WILSON, PROGRAMMER
 "Excellent Product, flawless" —PHILIP DALEY, PROGRAMMER
 "Great product, exceeds my expectations" —DR. STEVE COOK
 "An elegant solution... well thought out... worth it" —SOFTALK REVIEW, SEPT. 1983
 "The best thing for the Apple since the disk" —EDWARD DECKER, PHARMACIST/PROGRAMMER

Hollywood Hardware (213) 989-1204
 6842 VALJEAN AVENUE, VAN NUYS, CA 91406

USE OUR 60 DAY UNCONDITIONAL MONEY BACK TRIAL.
 IF YOU CAN PART WITH IT—WE'LL BUY IT BACK!
 ASK ABOUT DEALER/USER GROUP DISCOUNTS!



* G.P.L.E. © 1983 NEIL KONZEN. SOLD UNDER LICENSE FROM SYNERGISTIC SOFTWARE / APPLE IS A REGISTERED TRADEMARK OF APPLE COMPUTER INC. A.P.P.L.E. IS APPLE PUGETSOUND PROGRAM LIBRARY EXCHANGE, THE WORLD'S LARGEST APPLE USERS' GROUP WITH 25,000 MEMBERS.

ATARI COMPUTER OWNERS:

Pick the positively perfect, practical, peripheral package, from PERCOM DATA!



That's right... The positively perfect PERCOM DATA 5 1/4" floppy disk drive with **INTERNAL** **PRINTER-PORT** for your Atari 400/800 is now available!

Until now, Atari computer owners who wanted to hook a printer to their computer had only one choice... spend about \$220 for an interface device. **THOSE DAYS ARE OVER!** PERCOM DATA has built a parallel printer-port right into its new AT88 PD model. Now you can add a quality disk drive system **AND** have a place to plug in a printer... **WITHOUT BUYING** an interface.

The AT88 S1 PD™ disk drive operates in both single density (98K bytes formatted) and double density (176K bytes formatted).

What more could you want? **NO INTERFACE!** a high quality PERCOM DATA disk drive **AND** a built-in **PRINTER-PORT!**... all with a price of **\$599!**

Pick up a positively perfect PERCOM DATA disk drive with printer port... pronto!

For the name of an authorized PERCOM DATA dealer near you... call our **TOLL-FREE HOTLINE 1-800-527-1222 NOW**... or write for more information.

Perfectly Priced

\$599.

PERCOM DATA

Expanding Your Peripheral Vision


PERCOM DATA

PERCOM DATA

GETAWAY!



You've got the loot ... now, **GETAWAY!** to a great new game from the Atari® Program Exchange!

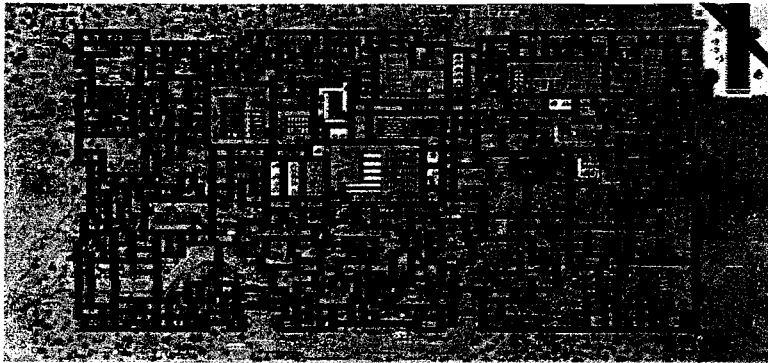


It's *all* there! The squall of sirens, the crazy turns down endless city streets, the anxious search for ill-gotten gain, the race against time for a safe place to stash your cash! Now your gas tank is nearly empty and night is about to fall. The coppers are closing in fast. Before you learn again that crime doesn't pay...Quick! **GETAWAY!**


Ask for **GETAWAY!** at your local Atari software retailer, or order direct. Phone 800-538-1862, or 800-672-1850 in California. Or write Atari Program Exchange, P.O. Box 3705, Santa Clara, CA 95055.

Cassette (410) APX-10195 32K \$29.95
Diskette (810) APX-20195 32K \$29.95
For direct orders, add \$2.50.

TYPO ATTACK!

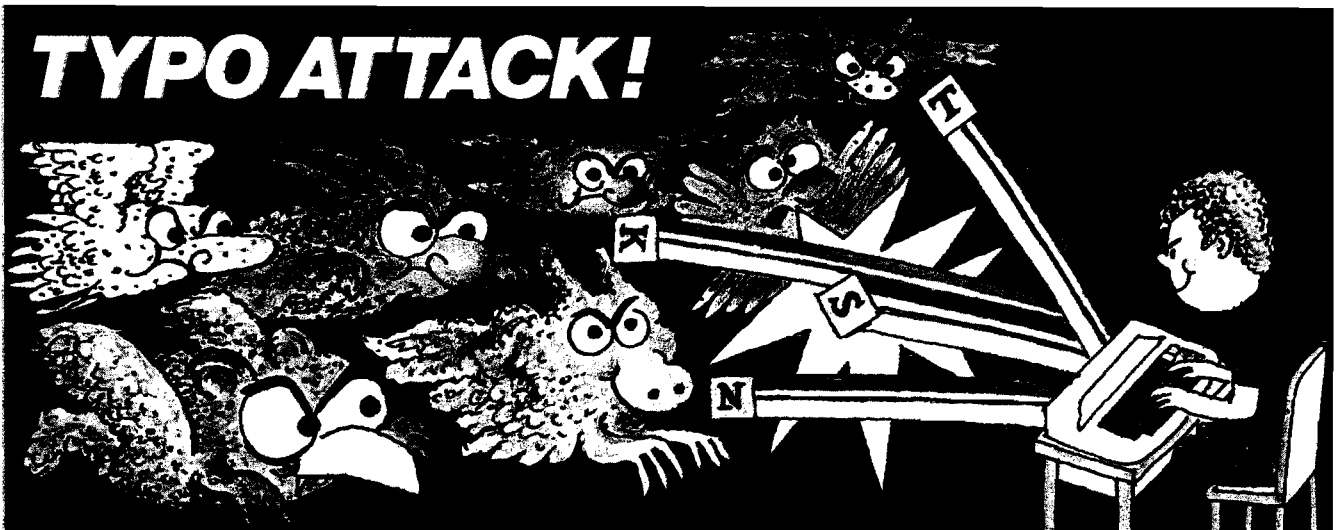

You're in for a nasty spell ... unless you stop the Typos!

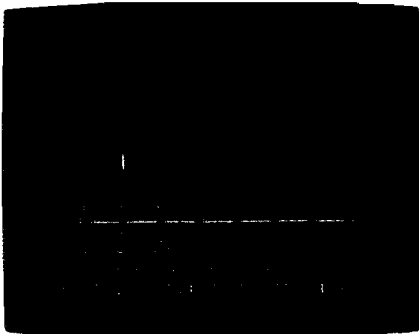

In the dusky world beneath your keyboard the gruesome Typos dwell ... waiting to attack! Term paper due tomorrow? Got to get that book report typed? Fool! The Typos will devour your letters as you type! That could spell D-O-O-M-E for you!

Before you start typing, get down to the real work: destroy the Typos before they destroy your prose...

uh, proze...prrose...Oh NO! THE TYPOS!!! Get **TYPO ATTACK**, a grand and glorious game from Atari® Program Exchange. It might even improve your typing!

Ask for **TYPO ATTACK** at your local Atari software retailer, or order direct. Phone 800-538-1862, or 800-672-1850 in California. Or write Atari Program Exchange, P.O. Box 3705, Santa Clara, CA 95055.

Cassette (410): APX-10180 8K \$29.95
Diskette (810): APX-20180 16K \$29.95
For direct orders, add \$2.50.

MICRO CALC

by Phil Daley

Typing in the Listing

The assembly listing is for reference only; the data statements for poking the machine language are contained in the BASIC program (Listing 1). After seeing how the program works in BASIC, line 1250 in line 140 can be eliminated to remove the initial screen each time the program runs.

Features:

- ✓ 15 working lines
- ✓ support of disk or tape files
- ✓ optional zeroing of user tables
- ✓ multiple statement support
- ✓ display of disk or tape file name

Operating Instructions

- @ performs calculations
- CLEAR zeros user variables
- & enters file mode
- Shift CLEAR clears screen
- right arrow moves up one line

Using the Internal TIMER

The Color Computer has a special variable TIMER which increments once every 1/60 second. You can use this timer on a Micro Calc screen to compare the speed of BASIC functions. Following is a screen demonstration of this point:

```
A = 5.3507
T = TIMER
B = A ^ 2
U = TIMER - T
U?
T = TIMER
B = A * A
U = TIMER - T
U?
```

You may be surprised by the results of this comparison between using exponentiation and simple multiplication to square a number. Other comparisons you may wish to try are:

- using a number vs. a variable in calculation
- the SQR() function vs. raising to the .5 power
- SIN() vs. COS()

Listing 1

```
10 *MICROCALC for the TRS80CoCo
20 *By P. Daley
30 *Version 1.0 : 10/14/83
40 *Copyright (C) 1983
50 *by MICRO Ink
60 *10 Northern Blvd.
70 *Amherst, NH 03031
80 *PRETEND IT'S A 16K MACHINE
90 *AND SAVE A FEW BYTES FOR M/L
100 CLEAR1000,16282
110 GOSUB420: GOSUB1190
120 B1=32
130 DEF USR0=16283: CLS2
140 DIMB$(15): GOSUB1250
150 C%=STRING$(32,159)
160 GOTO1150
170 PRINT@32*X1,B$(X1);CHR$(B1);LEFT$(C%,30-LEN(B$(X1)));
180 RETURN
190 X1=0:Y1=0
200 GOSUB170
210 A%=INKEY$
220 IFA$=""THENZ10
230 IFA$="?"THENB1=32:GOSUB170:GOTO490
240 IFA$=CHR$(12)THENGOSUB1230:GOTO210
250 IFA$=CHR$(92)THENFORI1=@TO14:B$(I1)=""NEXT:
    B1=32:GOTO1150
260 IFASC(A%)>39ANDASC(A%)<96THEN340
270 B1=32:GOSUB170
280 IFA$=CHR$(13)THENX1=X1+1:IFX1>14THENX1=0
290 IFA$=CHR$(8)ANDY1>0THENB$(X1)=LEFT$(B$(X1),
    LEN(B$(X1))-1):Y1=Y1-1
300 IFA$=CHR$(9)THENX1=X1-1:IFX1<0THENX1=14
310 IFA$=CHR$(10)THENX1=X1+1:IFX1>14THENX1=0
320 IFA$="%"THEN990
330 GOTO300
340 Y1=Y1+1:IFY1>29THENB1=32:GOSUB170:X1=X1+1:Y1=0
350 IFLEN(B$(X1))=>29THENX1=X1+1:GOTO370
360 B$(X1)=B$(X1)+A%
370 IFX1>14THENX1=0
380 Y1=LEN(B$(X1)): B1=95
390 IFMID$(B$(X1),2,1)=""?THENB$(X1)=LEFT$(B$(X1),2)
400 GOSUB170
410 GOTO210
420 *M/L ROUTINE TO EVALUATE
430 *EXPRESSION AND RETURN
440 FORI1=16283TO16283+26
450 READA1:POKEI1,A1:NEXT:RETURN
460 DATA 158,166,52,16,142,2,221,159,166
470 DATA 189,184,33,142,2,220,159,166,166,132
480 DATA 189,173,198,53,16,159,166,57
490 *ROUTINE TO POKE EXPRESSIONS
500 *SET UP VARIABLES AND PRINT
510 FORI1=@TO14: CT=0: BUF=732
520 IFLEN(B$(I1))<2THEN 660
530 IFMID$(B$(I1),2,1)<>"??"THEN610
540 FORJ1=1TOLEN(B$(I1))
550 IFMID$(B$(I1),J1,1)=""?THEN FLAG=1:GOSUB500:GOTO570
560 POKEBUF+J1,ASC(MID$(B$(I1),J1,1)): CT=CT+1
570 NEXT
580 POKEBUF+J1,13: BUF=BUF-(CT+1)
590 CT=0: Z1=USR0(Z1)
600 IF FLAG=1 THEN FLAG=0: RETURN
610 IFMID$(B$(I1),2,1)<>"??"THEN660
620 KK=ASC(LEFT$(B$(I1),1))-64
630 GOSUB700
640 B$(I1)=LEFT$(B$(I1),2)+STR$(Z1)
650 X1=I1:B1=32:GOSUB170
660 NEXT
670 X1=0:B1=95:GOSUB170
```

(Continued on next page)

Listing 1 (continued)

```

680 GOTO210
690 KK=ASC(LEFT$(B$(I1),1))-64
700 ON KK GOTO 720,730,740,750,760,770,780,790,800,810,
820,830,840,850,860,870,880,890,900,910,920,930,940,
950,960,970
710 RETURN
720 Z1=A:RETURN
730 Z1=B:RETURN
740 Z1=C:RETURN
750 Z1=D:RETURN
760 Z1=E:RETURN
770 Z1=F:RETURN
780 Z1=G:RETURN
790 Z1=H:RETURN
800 Z1=I:RETURN
810 Z1=J:RETURN
820 Z1=K:RETURN
830 Z1=L:RETURN
840 Z1=M:RETURN
850 Z1=N:RETURN
860 Z1=O:RETURN
870 Z1=P:RETURN
880 Z1=Q:RETURN
890 Z1=R:RETURN
900 Z1=S:RETURN
910 Z1=T:RETURN
920 Z1=U:RETURN
930 Z1=V:RETURN
940 Z1=W:RETURN
950 Z1=X:RETURN
960 Z1=Y:RETURN
970 Z1=Z:RETURN
980 RETURN
990 CLS:PRINT@64,"SAVE OR LOAD?"
1000 INPUT#
1010 PRINT:INPUT"FILENAME: ";F$
1020 IF LEN(F$)=0 THEN F$="MICRO"
1030 F$=F$+".CAL"
1040 B$(15)=F$
1050 IF LEFT$(A$,1)="L" THEN 110
1060 OPEN "O",#TD,F$
1070 FOR I1=0 TO 14
1080 WRITE #TD,B$(I1)
1090 NEXT:CLOSE #TD
1100 GOTO1150
1110 OPEN "I",#TD,F$
1120 FOR I1=0 TO 14

```

I

H

```

1130 INPUT #TD,B$(I1)
1140 NEXT:CLOSE #TD
1150 CLS2:FOR X1=0 TO 15
1160 GOSUB170
1170 NEXT:B1=95
1180 GOTO190
1190 CLS:PRINT"TAPE OR DISK SYSTEM: ";:INPUT#
1200 IF LEFT$(A$,1)="D" THEN TD=1 ELSE TD=-1
1210 RETURN
1220 D=99
1230 A=0:B=0:C=0:D=0:E=0:F=0:G=0:H=0:I=0:J=0:K=0:L=0:M=0;
N=0:O=0:P=0:Q=0:R=0:S=0:T=0:U=0:V=0:W=0:X=0:Y=0:Z=0
1240 RETURN
1250 FOR I1=0 TO 14:READB$(I1):NEXT:RETURN
1260 DATA=8000,,M=45,,I=11.9,,I=1/1200,,D=(1-(1+I)^-M)/I,
1270 DATA=A/D,,P=INT(P*100+.5)/100,,P?

```

A

M

Listing 2

```

# MICRO CALC
# Modified for TRS 80C
# by P. Daley
# October 14, 1983
#
# CONSTANTS
00A6 CHRPTR EQU #A6
02DC STRING EQU #2DC
ADC6 COMMAND EQU #ADC6
B821 TOKEN EQU #B821

9E A6 LDX CHRPTR Get current pointer
34 10 PSHS X Save it
8E 02DD LDX #STRING+1 Load pointer to input buffer
9F A6 STX CHRPTR Set pointer
8D B821 JSR TOKEN Tokenize string
8E 02DC LDX #STRING Reset pointer to tokenized
9F A6 STX CHRPTR string and store it
A6 B4 LDA ,X Get first character
8D ADC6 JSR COMMAND Execute immediate mode
35 10 PULS X Get old pointer and
9F A6 STX CHRPTR restore it
39 RTS Return

END START

```

MICRO

NOT ONLY ANOTHER TECHNOLOGICAL BREAKTHROUGH BUT ALSO EASY TO USE AND TO INSTALL

Modems are the most important device used to link two products together through ordinary telephone lines at miles apart The INCOMM STARCOM, a 300/1200 bps Auto Dial, Auto Answer, Auto Log On modem was introduced to


link two high speed devices together with having absolutely NO knowledge of computers or communications in general. Anybody can install and operate the STARCOM Family in a few minutes.

- STARCOM is a 300/1200 bps Auto Dial/Auto Log On/Auto Answer Modem
- OSCOM is a 300/1200 bps Auto Dial/Auto Log On/Auto Answer with Osborne (TM) Computer Software (included) modem.
- COMSOFT is a communication software package.
- OEM MODEM BOARD is also available for custom installation.

THE STARCOM \$450.



THE OSCOM \$520.



SEND FOR FULL LINE CATALOG of peripherals including Modems, Muxes, Switches and Breaker Boxes


DEALER INQUIRIES INVITED (312) 459-8881 or 1-800-323-2666

INCOMM

115 N. WOLF RD. WHEELING, IL 60090

SO COMPACT: Only 1 1/2" x 6 1/2" x 7 1/2" 1.5 lbs. Fits in your coat pocket!

Radio Shack Color Computer Memory Map

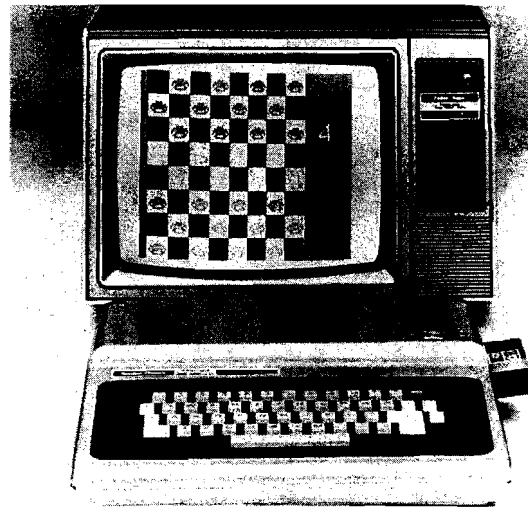

[All Numbers in Hex]

Overview

0000-03FF	Ram used by BASIC Interpreter
0400-05FF	Video Display [May be moved]
0600-0FFF	RAM for user program
1000-3FFF	Additional RAM in 16K system
4000-7FFF	Additional RAM in 32K system
8000-9FFF	Extended BASIC ROM
A000-BFFF	Basic Interpreter ROM
C000-FE00	Cartridge ROM
FF00-FFFF	I/O and Control

Extended


0003	General Counter
0006	String Flag
0007	Flag if Garbage Collected
0019	Start of User RAM
0019-001A	BASIC Program Begin
001B-001C	Pointer to Top of Program/Begin Variables
001D-001E	Pointer to Top of Variables/Start of Arrays
001F-0020	Pointer to End of Arrays/Start of Available Memory
0021-0022	Top of Stack/Start of String Pool
0023-0024	Start of Used Area of String Pool
0025-0026	Pointer to BASIC Memory Limit
0027-0028	End of String Pool/Start of User Space
0033-0034	Pointer to Current Data Read Position
0037-0038	Current Variable Name
0041	4 Bytes Used by Tokenize
0041-0048	Start and End Address of Block Move
0041	Highest Address to Move to
0043	Highest Address to Move
0045	Lowest Address Moved to
0047	Lowest Address to Move
0047	Highest String Found
004B	Address of Descriptor of Highest String Found
004F-0054	Floating Point Accumulator #1 [6 bytes]
0056	String Length
005C-0061	Floating Point Accumulator #2 [6 bytes]

0062	Sign Comparison
0063	Extended Precision Byte
0068-0069	Current Program Line
006C	Current Column Position
006F	Device Number for Output Character [0 = Screen, \$FE = Printer, \$FF = Tape, 1-16 = Disk BASIC File#]
0070	EOF on Tape File Flag
0071	Reset Flag = \$55 for Warmstart
0072-0073	Restart Pointer [contains \$80C0-BASIC Warmstart]
0074-0075	Pointer to End of Memory
0078	File Mode (0 = None, 1 = Input, 2 = Output)
0079	Tape Working Buffer Length
007A-007B	Tape Working Buffer Pointer
007C	Tape File Block Type (0 = Header, 1 = Data, \$FF = EOF)
007D	Number of Data Bytes in Cassette I/O Block
007E-007F	Program End Address 1 after a CLOADM
0080	Checksum
0081	Cassette Error #
0082	General Counter
0083	Pulse Width Count
0084	Rise/Fall Flag
0085	Last Sine Value
0087	Last Key Entered
0088-0089	Pointer to Current Cursor Position
008A-008B	Serial Read # of Tries
008C	Sound Frequency
008D-008E	Duration of Sound
008F	Start of Area Downloaded from ROM
0092	Controls Length of Unmodulated Carrier Preceding Cassette I/O
0094	Cursor Color
0095-0096	High and Low bytes of Baud Rate Code [Normally \$0057]
0097-0098	Carriage Return Delay [Normally \$0001]
0099	Comma Field Width [Normally \$10]
009A	Last Comma Field [Normally \$70]
009B	Printer Line Width [Normally \$84]
009C	Affects positions of Vars. Line-printed in Comma Fields [\$00]

009D-009E	Transfer Address after CLOADM	014E-014F	Address for USR8
009F	Start of get next character subroutine	0150-0151	Address for USR9
00A5	Start of get same character subroutine	0152-0159	Keyboard Rollover Table
00A6	Next Character Pointer	015A-015D	Joystick Readings
00A8-00AA	Jump Vector to Print OK	015A	Left Joystick Up/Down
00AB-00AE	Extended Product Area	015B	Left Joystick Left/Right
00AF	Trace Flag	015C	Right Joystick Up/Down
00B5	Current Color	015D	Right Joystick Right/Left
00B6	Current PMODE	015E-0160	Open Device Hook Called at \$A5F6/Set to \$C426 by Disk
00B7-00B8	End of Screen1	0161-0163	Device Number Check Called at \$A5B9/Set to \$C838 by Disk
00B9	Number of Bytes per Line	0164-0166	Return Device Parameters Called at \$A35F/Set to \$C843 by Disk
00BA-00BB	Address of Graphics Page	0167-0169	Character Output Called at \$A282/Set to \$8273 by Extended/Set to \$CB4A by Disk
00BC	\$E = Disk system,\$6 = No disk	016A-016C	Character Input Called at \$A176/Set to \$BCF1 by Extended/Set to \$C58F by Disk
00BD	X1	016D-016F	Check File OPEN for Input Called at \$A3ED/Set to \$C818 by Disk
00BF	Y1	0173-0175	Close All Open Files Called at \$A426/Set to \$CA3B by Disk
00C1	Color Set 1 = 8	0176-0178	Close One File Called at \$A42D/Set to \$8286 by Extended/Set to \$CA4B by Disk
00C3	X2	0179-017B	Print Using Called at \$B918/Set to \$8E90 by Extended
00C5	Y2	017C-017E	File Item Scanner Called at \$B061/Set to \$CC5B by Disk
00D7	Temp	017F-0181	Break Key Check Called at \$A549/Set to C859 by Disk
00DB	Change Flag	0182-0184	Get Line From Keyboard Called at \$A390/Set to JMP RTS by Disk
00E6	DLOAD Baud Rate	0185-0187	Finish Loading ASCII File Called at \$A4BF/Set to \$CA36 by Disk
00E7	Input Timeout Constant	0188-018A	Check End Of File Called at \$A5CE/Set to \$C860 by Disk
00EA	Operation Code	018B-018D	Evaluate Operánd Called at \$B223/Set to \$8846 by Extended/Set to \$CDF6 by Disk
00EB	Drive Number	018E-0190	User Error Called at \$AC46/Set to JMP RTS by Disk
00EC	Track	0191-0193	Error Called at \$AC49/Set to \$88F0 by Extended/Set to \$C24D by Disk
00ED	Sector	0194-0196	Run Called at \$AE75/Set to \$829C by Extended/Set to \$C990 by Disk
00EE	Buffer Address	0197-0199	Hex & Octal Called at \$BD22/Set to \$87E5 by Extended
00F0	Status Returned	019A-019C	Execute Line Called at \$AD9E/Set to \$82B9 by Extended
0100-0102	Software Interrupt 3 Called by Vector at \$FFF2	019D-019F	Graphics Address Called at \$A8C4
0103-0104	Software Interrupt 2 Called by Vector at \$FFF4	01A0-01A2	CLS,GET,PUT etc. Called at \$A910,\$975C,\$8AFA,\$8162 Set to \$C29A by Disk
0105-0108	Software Interrupt 1 Called by Vector at \$FFFA	01A3-01A5	Tokenize Called at \$B821/Set to \$8304 by Extended
0109-010B	Non-Maskable Interrupt Called by Vector at \$FFFC Set to \$D7AE by Disk	8000-9FFF	Extended BASIC ROM
010C-010E	Interrupt Request Called by Vector at \$FFF8 Set to \$A9B3/Set to \$894C by Extended/Set to \$D7BC by Disk	01D1	Tape File Length
010F-0111	Fast Interrupt Vector Called by Vector at \$FFF6/Set to \$A0F6	01D2-01D9	Tape File Name
0112-0113	High and low bytes of TIMER	01DA-02D8	Cassette Buffer
0116-0117	Seed for RND Function	01DA-01E1	CLOADM File Name
011A	Shift Lock Flag	01E5-01E6	EXEC Address from Tape
011C	Keyboard Delay Constant		
011D-011F	Jump vector to \$8489-Print OK		
0120-013C	Token Table Directory[Byte 1 = # of Keywords,Byte 2,3 = Address of Table, Byte 4,5 = Address of Subroutines]		
0120-0124	BASIC Commands		
0125-0129	BASIC Functions		
012A-012E	Extended BASIC Commands		
012F-0133	Extended BASIC Functions		
0134-0138	Disk BASIC Commands		
0139-013C	Disk BASIC Functions		
013E-013F	Address for USR0		
0140-0141	Address for USR1		
0142-0143	Address for USR2		
0144-0145	Address for USR3		
0146-0147	Address for USR4		
0148-0149	Address for USR5		
014A-014B	Address for USR6		
014C-014D	Address for USR7		

VIDEO TERMINAL BOARD 82-018

This is a complete stand alone Video Terminal board. All that is needed besides this board is a parallel ASCII keyboard, standard NTSC monitor, and a power supply. It displays 80 columns by 25 lines of UPPER and lower case characters. Data is transferred by RS232 at rates of 110 baud to 9600 baud — switch selectable. The UART is controlled (parity etc.) by a 5 pos. dip switch.

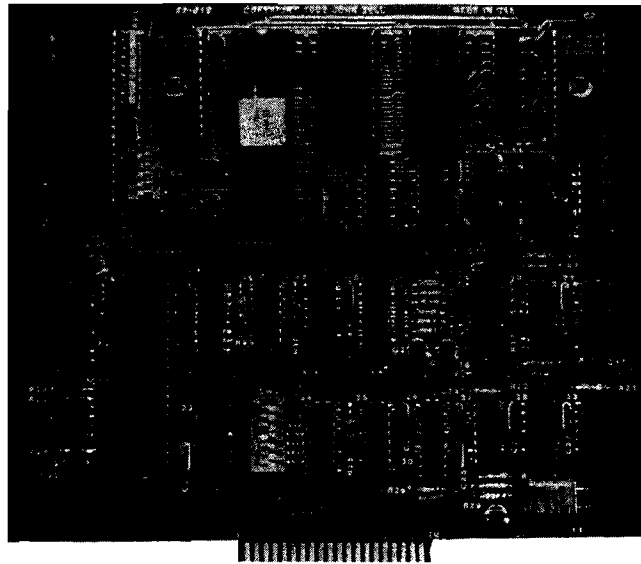


Complete source listing is included in the documentation. Both the character generator and the CRT program are in 2716 EPROMS to allow easy modification to your needs.

This board uses a 6502 Microprocessor and a 6545-1 CRT controller. The 6502 runs during the horz. and vert. blanking (45% of the time). The serial input port is interrupt driven. A 1500 character silo is used to store data until the 6502 can display it.

Features

- 6502 Microprocessor
- 6545-1 CRT controller
- 2716 EPROM char. gen.
- 2716 EPROM program
- 4K RAM (6116)
- 2K EPROM 2716
- RS232 I/O for direct connection to computer or modem.
- 80 columns x 25 line display
- Size 6.2" x 7.2"
- Output for speaker (bell)
- Power +5 700Ma.
+12 50Ma.
-12 50Ma.

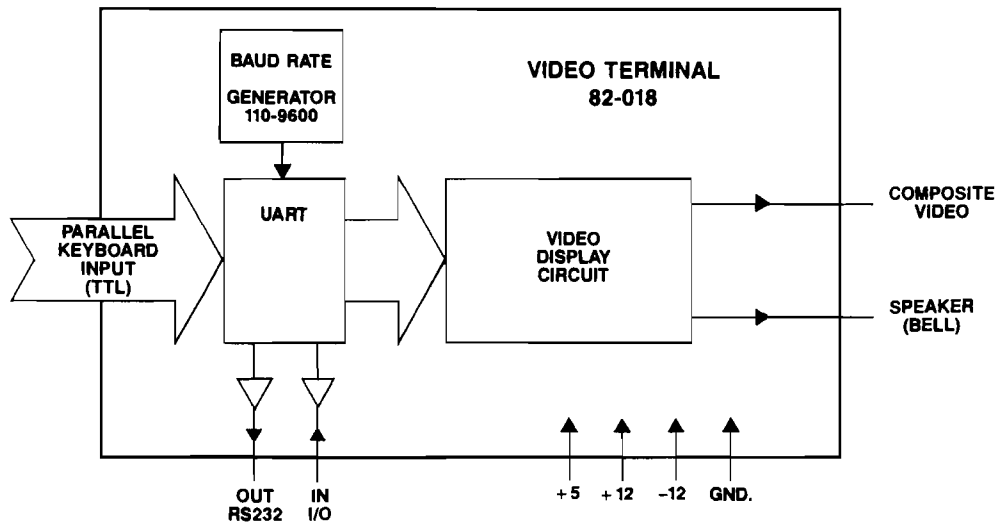

This board is available assembled and tested, or bare board with the two EPROMS and crystal.

Assembled and tested	#82-018A	\$199.95
Bare board with EPROMS and crystal	#82-018B	\$ 89.95

Both versions come with complete documentation.



JOHN BELL ENGINEERING, INC.

ALL PRODUCTS ARE AVAILABLE FROM JOHN BELL ENGINEERING, INC. • 1014 CENTER ST., SAN CARLOS, CA 94070

ADD SALES TAX IN CALIFORNIA • ADD 5% SHIPPING & HANDLING 3% FOR ORDERS OVER \$100

SEND \$1.00 FOR CATALOG

(415) 592-8411

WILL CALL HOURS: 9am - 4pm

10% OUTSIDE U.S.A.
ADD \$1.50 FOR C.O.D.



#249

01E7-01E8 Load Address from Tape
 02DC Contains token for first keyword in BASIC Statement
 02DD-03DC Console I/O Buffer
 0400-05FF Lo-res screen
 0600-35FF Possible Graphic Screens
 0600 Bottom of program area/No Disk
 0600-06FF Disk Buffer
 0700-07FF Disk Buffer
 0800-0927 Drive Table
 097E Table of Current Tracks
 0982 NMI in use flag
 0983 NMI JMP
 0985 Motor shutoff counter
 0986 Current latch data
 0C00 Program Start/Disk System
 0FFF Top of memory (4K)
 3FFF Top of memory (16K)
 7FFF Top of memory (32K)
 8000-9FFF Extended BASIC ROM
 807F Cold Start to BASIC without size Search and Workspace init. Resets pointers to Start of BASIC Program
 80C0 Warmstart to BASIC. Does not Reset Pointers to Start of BASIC Prog
 8183-81EF Extended Command Token Table
 81F0-821D Subroutine Entry Addresses
 821E-8256 Extended Function Token Table
 8257-8272 Subroutine Entry Addresses
 82B9 Break or Stop Routine
 82BB Extended interpret loop
 8378 COSine
 8381 TANgent
 83B0 ArcTaNgent
 8446 LOG
 8480 Square Root
 84F2 EXponential
 8524 FIX
 8533 EDIT
 86A7 TRace ON
 86A8 TRace OFF
 86AC POSition
 86BE VARiable PoinTeR
 874E STRING\$
 877E INSTRing
 8871 DEFine
 8968 TIMER
 8970 DELete
 8A09 RENUMber
 8BDD HEX\$
 8C18 DownLOAD
 8DBC Input Serial Character
 8E06 Output Serial Character
 928F Find Byte/Bit Routine
 92A6 Byte/Bit; PMODES 0,2,4
 92C2 Byte/Bit; PMODES 1,3
 92DD Bit Tables
 9339 PPOINT
 9361 PSET
 9365 PRESET
 93BB LINE
 9444 Draw Horizontal Line
 946C Draw Vertical Line

94A1 Draw Line
 94E2 The Draw Line Loop
 9506 Move Up, Down, Left, Right Routines
 9532 PCLS
 9546 COLOR
 9621 PMODE
 9670 SCREEN
 968B PCLEAR
 9710 Compare Two Points
 9723 PCOPY
 9755 GET
 9758 PUT
 98EC PAINT
 9A22 PLAY
 9CB6 DRAW
 9E9D CIRCLE
 A000-BFFF BASIC ROM
 A000-A001 Address of Check Keyboard
 A002-A003 Address of Character Out
 A004-A005 Address of Cassette Read On
 A006-A007 Address of Block In
 A008-A009 Address of Block Out
 A00A-A00B Address of Joystick In
 A00C-A00D Address of Header Out
 A00E Secondary Reset
 A027 Primary Reset
 A06E Hardstart (After Reset)
 A0A6 Check for Disk ROM
 A0CB Check for Extended ROM
 A0D7 Print Version
 A0E8 Softstart (After Reset)
 A0F6 FIRQ Entry (ROM Pack Check)
 A10D Start of Area Downloaded to RAM at \$8F
 A129 Start of Area Downloaded to RAM at \$10C
 A171 Input Character, Bit 7 Clear
 A176 Input Character
 A199 Blink Cursor Color
 A1B1 Wait for Keypress and Read Kybd; Char Returned in A Register
 A1C1 Check Keyboard and Get Key if pressed; Z = 1, A = 0 if no key Z = 0, A = key, B and X Preserved
 A26E Table of Codes for non-alpha keys
 A282 Output Character to Device Specified by \$6F, All But CC Preserved
 A2BF Output Character in A to Printer (RS232)
 A30A Output Character in A to Screen
 A390 Input Line from Keyboard into Buffer at \$02DD; Return X\$02DC; Zero byte at End of Buffer
 A416 CLOSE
 A44C CSAVE
 A46C Perform CSAVEM Function; Requires Start of Memory Block in \$19-A0 and in \$01E7-8, Transfer Address in \$01E5-6, and File Name in \$01D2-9. Enter with A = 2 and X = 0.
 A498 CLOAD
 A4FE CLOADM
 A53E EXEC

A564	INKEY\$		Address, \$45-6 is Destination Bottom
A59A	Transfer Block		Address after Move, \$47-8 is Source
A5CE	EOF		Bottom Address
A5EC	SKIPF	AC46	Error Handler
A5F6	OPEN	AC73	Idle Loop
A629	Open Tape File	AD17	NEW (Clear Memory)
A681	Find Filename	AD19	Execute NEW
A6FE	Blink Screen Corner	AD47	FOR
A701	READ Block from Tape	AD9E	Interpret Loop
A70B	Read a Block from Cassette; Must be On and In Bit Sync. \$7C Contains File Block Type:0 = File Header, 1 = data, \$FF = EOF. \$7D Contains Number of Data Bytes in File (0-\$FF). Z = 1, A = 0 if no Errors, Z = 0, A = 1 if Checksum Error, Z = 0, A = 2 if Memory Error. X = Buffer Start Block Length if no Error, X Points to Beyond Bad Address if Error. U and Y Preserved	ADC6	Execute line
A77C	Start Cassette and Get Into Bit Sync for Reading. U and Y Preserved, FIRQ and IRQ Masked.	ADE4	RESTORE
A7BD	MOTOR	ADEB	Check for Break or Pause
A7D8	Turn Cassette On and Write Leader	AE02	END
A7E5	Write Tape File	AE09	STOP
A7E9	Turn Off Motor	AE30	CONTINUE
A7F4	Write Block to Cassette; Tape to Speed and Leader Written, \$7E = Buffer Address, \$7C = Block Type, \$7D = Number of Data Bytes, X = Buffer Address Data Bytes, All Registers Modified	AE41	CLEAR
A85C	Sine Table for Cassette Out	AE75	RUN
A880	SET	AE86	GO
A8B1	RESET	AE92	GOSUB
A8F5	POINT	AEA4	GOTO
A910	CLS	AEC0	RETURN
A928	Clear Screen and Home Cursor	AEE0	DATA
A937	Print Copyright (CLS 9)	AEE3	REM or '
A94B	SOUND	AEE8	ELSE
A956	Generate Sound	AF14	IF
A992	AUDIO	AF42	ON
A9B3	Interrupt Processor (60 Hz Counter)	AF67	Get Unsigned Integer
A9C6	JOYSTICK	AF89	LET
A9DE	Read and Store Joystick Values; Left:Up/Down is \$15A,Rt/Lft is \$15B; Right:Up/Down is \$15C,Rt/ Lft is \$15D. Y is Preserved	AFF5	INPUT
AA29	Function Address Table	B046	READ
AA51	Operation Table for +, -, *, /, , AND,OR (3 bytes each-Addresses and Precedence Values)	B0F8	NEXT
AA66	Command Name Table	B156	Get Expression
AB1A	Function Name Table	B1CB	Another Entry in Operation Table
AB67	Command Address Table	B223	Get Operand
ABAF	Error Code Table	B290	Execute Functions
ABE1	Text Strings	B2D4	AND/OR Operations
ABF9	Search Stack for GOSUB or FOR	B2F4	Relational Operations
AC1E	Open up space in memory	B34E	DIMension
AC20	Move Block of Memory Starting at Top, \$41-2 is Destination Top Address, \$43-4 is Source Top	B38F	Variable Creation
		B3E4	Evaluate Integer Expression
		B3ED	Convert Number in FPAC into 16-bit Two's Complement Integer Left in D Register; Overflow, return to BASIC if > +32767 or < -32768
		B4EE	MEM
		B4FD	STR\$
		B518	Get String
		B56D	Allocate string routine
		B591	Garbage Collect
		B5D8	Process one descriptor
		B5EF	Compact one string
		B6F1	LEN
		B68C	CHR\$
		B6A0	ASC
		B6AB	LEFT\$
		B6C8	RIGHT\$
		B6CF	MID\$
		B716	VAL
		B750	PEEK
		B757	POKE
		B75E	LLIST Command
		B764	LIST Command
		B7C2	Untokenize

B7E6 Untokenize one token
 B821 Tokenize
 B892 Tokenize one word
 B8F7 PRINT
 B97E TAB
 B99C Print Text String
 B9AC Print a Space
 B9B4 Start of Floating Point Routines-
 Rounding
 B9B9 Subtract from FPAC1
 B9C2 Add to FPAC1
 BA79 Two's Complement FPAC1

 BAC5 Constant 1.0
 BACA Multiply
 BB2F Move [X] to FPAC2
 BB7D Constant 10.0
 BB91 Divide
 BC4A Move FPAC2 to FPAC1
 BC5F Move FPAC1 to FPAC2
 BC6D Test FPAC1 for Zero and Sign
 BC7A SiGN
 BC93 ABSolute value
 BCEE INTeger
 BD12 Convert String to Floating Point
 BDB6 Constants 99999999.9, 999999999,
 1E09
 BDCC Display the Decimal Value in D
 Register
 BDD9 Convert FPAC1 to ASCII
 BEC0 Constant 0.5
 BEC5 Series of 4 Byte Constants
 BF1F RaNDom
 BF78 SiNe
 BFBD Constants 2 pi, 0.25
 BFC8 Series of 5 Byte Constants
 BFF2 Interrupt and Reset Vectors
 BBF2-BBF3 SWI3
 BBF4-BBF5 SWI2
 BBF6-BBF7 FIRQ
 BBF8-BBF9 IRQ
 BBFA-BBFB SWI1
 BBFC-BBFD NMI
 BBFE-BBFF RESET
 C000-D7FF Disk BASIC ROM
 C004 Address of DSKCON
 C0D4 Warm Start to Disk BASIC
 C17F-C1DA Disk Command Token Table
 C1DB-C200 Disk Subroutine Addresses
 C6C2 KILL
 C932 SAVE
 C98B MERGE
 C99A LOAD
 CBCF DIRectory
 CD1A CVN
 CD28 MKN\$
 CD36 LOC
 CD5B LOF
 CDC0 FREE
 CDE9 DRIVE
 CF3F RENAME
 CF8A WRITE
 CFE0 FIELD
 D025 RSET

D026 LSET
 D080 FILES
 D146 UNLOAD
 D175 BACKUP
 D2CC COPY
 D3FF DSKI\$
 D474 DSKO\$
 D4AB DSKINI
 D65B VERIFY
 D66C DSKCON
 D6C5 Restore
 D6DE Get Status
 D6FD Delay 78 msec
 D705 Read/Write sector
 D7A2 Command Address Table
 D7AA Bit Table for Drives
 D7AE NMI Handler
 D7BC IRQ Handler
 FF00-FFFF I/O and Control
 FF00-FF03 PIA U8
 FF00 Bit 0-KeyBoard Row 1 and Right
 joystick switch
 Bit 1-KeyBoard Row 2 and Left
 joystick switch
 Bit 2-KeyBoard Row 3
 Bit 3-keyboard Row 4
 Bit 4-KeyBoard Row 5
 Bit 5-KeyBoard Row 6
 Bit 6-KeyBoard Row 7
 Bit 7-Joystick comparison input
 FF01 Bit 0-Control of the Horizontal
 sync clock{63.5 microsec}
 Bit 1-;interrupt input
 ;
 Bit 2-Normally 1 0 = Changes FF00 to data
 direction register
 Bit 3-SEL 1: LSB of the two analog MUX
 select lines
 Bit 4-1 Always
 Bit 5-1 Always
 Bit 6-Not used
 Bit 7-Horizontal sync interrupt flag
 FF02 Bit 0-KeyBoard Column 1
 Bit 1-KeyBoard Column 2
 Bit 2-KeyBoard Column 3
 Bit 3-KeyBoard Column 4
 Bit 4-KeyBoard Column 5
 Bit 5-KeyBoard Column 6
 Bit 6-KeyBoard Column 7
 Bit 7-KeyBoard Column 8
 FF03 Bit 0-Control of the field
 ;sync clock 16.667 MS
 Bit 1-;interrupt input
 ;
 Bit 2-Normally 1 0 = changes FF02 to data
 direction register
 Bit 3-SEL 2 MSB of the two analog MUX
 select lines
 Bit 4-1 Always
 Bit 5-1 Always
 Bit 6-Not used
 Bit 7-Feld sync interrupt flag
 FF20-FF23 PIA U4

FF20 Bit 0-Cassette data input
 Bit 1-RS-232 data output
 Bit 2-6 bit D/A LSB
 Bit 3-6 bit D/A
 Bit 4-6 bit D/A
 Bit 5-6 bit D/A
 Bit 6-6 bit D/A
 Bit 7-6 bit D/A MSB

FF21 Bit 0-Control of the CD;
 ;RS-232 status input
 Bit 1-;
 ;
 Bit 2-Normally 1
 Bit 3-Cassette motor control 0 = Off 1 = On
 Bit 4-1 Always
 Bit 5-1 Always
 Bit 6-Not used
 Bit 7-CD interrupt flag

FF22 Bit 0-RS-232 Data input
 Bit 1-Single bit sound output
 Bit 2-RAM size input
 Bit 3-VDG Control output
 Bit 4-VDG Control output
 Bit 5-VDG Control output
 Bit 6-VDG Control output
 Bit 7-VDG Control putput

FF23 Bit 0-;Control of the
 ;Cartridge interrupt
 Bit 1-;input
 ;
 Bit 2-Normally 1 0 changes FF22 to data
 direction register

 Bit 3-Six bit sound enable
 Bit 4-Always 1
 Bit 5-Always 1
 Bit 6-Not used
 Bit 7-Cartridge interrupt flag

FF40 Output latch
 Bit 0-Drive Select 0
 Bit 1-Drive Select 1
 Bit 2-Drive Select 2
 Bit 3-Motor On
 Bit 4-Precomp
 Bit 5-Double Density
 Bit 6-Drive Select 3
 Bit 7-Halt Enable

FF48 Disk Status
 FF49 Disk Track Number
 FF4A Disk Sector Number
 FF4B Disk Data

FFE0-FFF1 Not used
 FFF2-FFF3 SWI3 Vector
 FFF4-FFF5 SWI2 Vector
 FFF6-FFF6 FIRQ Vector
 FFF8-FFF8 IRQ Vector
 FFFA-FFFB SWI1 Vector
 FFFC-FFFD NMI Vector
 FFFE-FFFF Reset Vector

FFC0	C	V0	Display	1	0	1	0	1	0	1	0											
FFC1	S																					
FFC2	C	V1	Mode	1	1	0	0	1	1	0	0											
FFC3	S																					
FFC4	C	V2	Control	1	1	1	1	0	0	0	0											
FFC5	S																					
FFC6	C	F0	Display																			
FFC7	S																					
FFC8	C	F1	Offset																			
FFC9	S																					
FFCA	C	F2	Binary]																			
FFCB	S																					
FFCC	C	F3	Address of Upper-left- most display element = 0000(1/2k offset)																			
FFCD	S																					
FFCE	C	F4																				
FFCF	S																					
FFD0	C	F5																				
FFD1	S																					
FFD2	C	F6																				
FFD3	S																					
FFD4	C	P1	Page #1 (=0)																			
FFD5	S																					
FFD6	C	R0	CPU	(Transparent				1	0	1	0											
FFD7	S																					
FFD8	C	R1	Rate	refresh]				1	1	0	0											
FFD9	S																					
FFDA	C	M0	Memory	1	0	1	0															
FFDB	S																					
FFDC	C	M1	Size	1	1	0	0															
FFDD	S																					
FFDE	C	TY	Map Type (=0)																			
FFDF	S																					

-N.U.

-G1C,G1R

-G2C

-G2R

-G3C

-G3R

-G6R,G6C

-N.U.

0.9 MHz only

-0.9/1.8 MHz

-N.U.

-N.U.

-4k

-16k

-32/64k

-N.U.

) Dynamic RAMs

HEX	DEC	COCO	DBL	DRAG	DBL	MC - 10
80	128	FOR	SGN	FOR	SGN	FOR
81	129	GO	INT	GO	INT	GOTO
82	130	REM	ABS	REM	ABS	GOSUB
83	131	'	USR	'	POS	REM
84	132	ELSE	RND	ELSE	RND	IF
85	133	IF	SIN	IF	SQR	DATA
86	134	DATA	PEEK	DATA	LOG	PRINT
87	135	PRINT	LEN	PRINT	EXP	ON
88	136	ON	STR\$	ON	SIN	INPUT
89	137	INPUT	VAL	INPUT	COS	END
8A	138	END	ASC	END	TAN	NEXT
8B	139	NEXT	CHR\$	NEXT	ATN	DIM
8C	140	DIM	EOF	DIM	PEEK	READ
8D	141	READ	JOYSTK	READ	LEN	LET
8E	142	RUN	LEFT\$	LET	STR\$	RUN
8F	143	RESTORE	RIGHT\$	RUN	VAL	RESTORE
90	144	RETURN	MID\$	RESTORE	ASC	RETURN
91	145	STOP	POINT	RETURN	CHR\$	STOP
92	146	POKE	INKEY\$	STOP	EOF	POKE
93	147	CONT	MEM	POKE	JOYSTK	CONT
94	148	LIST	ATN	CONT	FIX	LIST
95	149	CLEAR	COS	LIST	HEX	CLEAR
96	150	NEW	TAN	CLEAR	LEFT\$	NEW
97	151	CLOAD	EXP	NEW	RIGHT\$	CLOAD
98	152	CSAVE	FIX	DEF	MID\$	CSAVE
99	153	OPEN	LOG	CLOAD	POINT	LLIST
9A	154	CLOSE	POS	CSAVE	INKEY\$	LPRINT
9B	155	LLIST	SQR	OPEN	MEM	SET
9C	156	SET	HEX\$	CLOSE	VARPTR	RESET
9D	157	RESET	VARPTR	LLIST	INSTR	CLS
9E	158	CLS	INSTR	SET	TIMER	SOUND
9F	159	MOTOR	TIMER	RESET	PPOINT	EXEC
A0	160	SOUND	PPOINT	CLS	STRING\$	SKIPF
A1	161	AUDIO	STRING\$	MOTOR	USR	TAB(
A2	162	EXEC	CVN	SOUND		TO
A3	163	SKIPF	FREE	AUDIO		THEN
A4	164	TAB(LOC	EXEC		NOT
A5	165	TO	LOF	SKIPF		STEP
A6	166	SUB	MKN\$	DEL		OFF
A7	167	THEN	AS	EDIT		+
A8	168	NOT		TRON		-
A9	169	STEP		TROFF		*
AA	170	OFF		LINE		/
AB	171	+		PCLS		^
AC	172	-		PSET		AND
AD	173	*		PRESET		OR
AE	174	/		SCREEN		>
AF	175	^		PCLEAR		=
B0	176	AND		COLOR		<
B1	177	OR		CIRCLE		SGN
B2	178	>		PAINT		INT
B3	179	=		GET		ABS
B4	180	<		PUT		USR
B5	181	DEL		DRAW		RND
B6	182	EDIT		PCOPY		SQR
B7	183	TRON		PMODE		LOG
B8	184	TROFF		PLAY		EXP
B9	185	DEF		DLOAD		SIN
BA	186	LET		RENUM		COS (Continued on next page)

BB	187	LINE
BC	188	PCLS
BD	189	PSET
BE	190	PRESET
BF	191	SCREEN
C0	192	PCLEAR
C1	193	COLOR
C2	194	CIRCLE
C3	195	PAINT
C4	196	GET
C5	197	PUT
C6	198	DRAW
C7	199	PCOPY
C8	200	PMODE
C9	201	PLAY
CA	202	DLOAD
CB	203	RENUM
CC	204	FN
CD	205	USING
CE	206	DIR
CF	207	DRIVE
D0	208	FIELD
D1	209	FILES
D2	210	KILL
D3	211	LOAD
D4	212	LSET
D5	213	MERGE
D6	214	RENAME
D7	215	RSET
D8	216	SAVE
D9	217	WRITE
DA	218	VERIFY
DB	219	UNLOAD
DC	220	DSKINI
DD	221	BACKUP
DE	222	COPY
DF	223	DSKIS
E0	224	DSKOS

TAB(TAN
TO	PEEK
SUB	LEN
FN	STR\$
THEN	VAL
NOT	ASC
STEP	CHR\$
OFF	LEFT\$
+	RIGHT\$
-	MID\$
*	POINT
/	VARPTR
^	INKEY\$
AND	MEM
OR	
>	
=	
<	
USING	

MICRO

FORTH-79

Ver. 2 For your APPLE II/II+

The complete professional software system, that meets ALL provisions of the FORTH-79 Standard (adopted Oct. 1980). Compare the many advanced features of FORTH-79 with the FORTH you are now using, or plan to buy!

FEATURES	OURS	OTHERS
79-Standard system gives source portability.	YES	_____
Professionally written tutorial & user manual	200 PG.	_____
Screen editor with user-definable controls.	YES	_____
Macro-assembler with local labels.	YES	_____
Virtual memory.	YES	_____
Both 13 & 16-sector format.	YES	_____
Multiple disk drives.	YES	_____
Double-number Standard & String extensions.	YES	_____
Upper/lower case keyboard input.	YES	_____
LO-Res graphics.	YES	_____
80 column display capability	YES	_____
Z-80 CP/M Ver. 2.x & Northstar also available	YES	_____
Affordable!	\$99.95	_____
Low cost enhancement option:		
Hi-Res turtle-graphics.	YES	_____
Floating-point mathematics.	YES	_____
Powerful package with own manual, 50 functions in all, AM9511 compatible.		
FORTH-79 V.2 (requires 48K & 1 disk drive)		\$ 99.95
ENHANCEMENT PACKAGE FOR V.2		
Floating point & Hi-Res turtle-graphics		\$ 49.95
COMBINATION PACKAGE		\$139.95
(CA res. add 6% tax; COD accepted)		

MicroMotion

12077 Wilshire Blvd. # 506
 L.A., CA 90025 (213) 821-4340
 Specify APPLE, CP/M or Northstar
 Dealer inquiries invited.



Information was gleaned from the following sources in addition to personal observation:

Color Computer News
The Rainbow
80 Micro
John Beckett
John Steiner
Ralph Tenny



FOR YOUR APPLE II

Industry standard products at super saver discount prices

SOFTWARE

	List	SGC
ARTSCI		
Magicalc	\$149.00	\$ 99.00
Magic Window	99.00	65.95
ASHTON TATE		
DBASE (apple)	700.00	449.00
BRODERBUND		
Payroll	\$395.00	\$255.95
Acct/Rec.	395.00	255.95
Arcade Machine	59.95	39.95
Choplifter	34.95	24.95
Sea fox	29.95	20.95
Galaxy Wars	24.95	20.95
DATAMOST		
Property Mgr.	\$295.00	\$194.95
Real Estate		
Investment Package	179.95	118.95
Tax Beater	129.95	89.95
Zaxxon	39.95	27.95
Casino	39.95	27.95
Conquering Worlds	29.95	20.95
Mating Zone	29.95	20.95
Pandoras Box	29.95	20.95
Series Baseball	29.95	20.95
INFORM		
Zork 1, 2, 3	\$ 39.95	\$ 27.95
Planet Fall	49.95	32.95
Starcross	39.95	27.95
PEACHTREE		
Peachcalc	\$150.00	\$ 92.95
PeachPak (G1/Ar/Ap/)	395.00	226.95
Mailing List Mgr.	250.00	151.95
SENSIBLE SOFTWARE		
Medical dictionary	\$ 99.95	\$ 72.95
DOS Plus	25.00	18.95
Legal Dictionary	99.95	72.95
SIR TECH SOFTWARE		
Legacy of Lyligamyn	\$ 39.95	\$ 27.95
Wizardry	49.96	34.95
Galactic Attack	29.95	21.95
SIRIUS		
Bandits	\$ 34.95	\$ 24.95
Epoch	34.95	24.95
Fly Wars	29.95	20.95
Beer Run	29.95	20.95
Outpost	29.95	20.95
Snake Byte	29.95	20.95
Sneakers	29.95	20.95
Joy Port	49.95	37.95
STRATEGIC SIMULATIONS		
Germany	\$ 59.95	\$ 39.95
North Atlantic 1986	59.95	39.95
Rapid Deployment		
Force	34.95	25.95
Road to Gettysburg	59.95	39.95
Computer Baseball	39.95	28.95
Computer Quarterback	39.95	28.95
Bomb Alley	59.95	39.95
Napoleons Campaigns	59.95	39.95

SPECIAL AND NEW

ALBERT COMPUTER

64K Ram Upper and lower case character set, digitized audio control, RGB graphics, Graphics power pad, 110/220 volts, 8 to 32 dc power source, Magicalc, Magic Window, Magic Speller, Magic Writer.

Special Price \$1395.00

"New" from Prometheus Products

PRO MODEM 1200 Bell 212A 1200/300 Baud

A. Can be expanded into a telecommunication system as a stand-alone package.

B. Real time clock and calendar

C. Help Commands

D. Built-in diagnostics

E. Auto dialer

F. Programmable Intelligent Dialing

G. RS 232 interface

H. Internal Power Supply

OPTIONS

On line phone directory

Expandable buffer from 16K to 64K

SPECIAL \$ 475.00

FRANKLIN ACE 1000

64K, 2 disk drives, monitor, 80 column card

SPECIAL \$1499.00

PROMETHEUS PRODUCTS

16K Card \$ 65.00

64K Expand-A-Ram \$ 225.00

128K Expand-A-Ram \$ 275.00

Graphitti Card

(Specify Printer) \$ 89.00

P. S. 16K Buffer Card

Expandable to 64K \$ 105.00

Applesurance Card \$ 99.00

VersaCard Four cards in one

1. Serial 2. Parallel 3. Real Time clock and

calendar 4. BSR Port \$ 169.00

With Graphics \$ 203.00

PRT-1 Printer Card \$ 79.00

PRINTERS

NEC 8023

with interface

card and cables \$ 449.00

OKI 82A

80 col./120cps \$ 439.00

OKI 83A

136 col./120 cps \$ 695.00

Brother

Letter Quality \$ 889.00

Transtar 315

Color Printer \$ 469.95

ACCESSORIES

T. G. Joystick \$ 39.95

Select a Port \$ 39.95

System Saver Fan \$ 69.95

Super Fan 11 \$49.95

Slimline Disk Drives \$ 225.00

Disk Drives Full Ht. \$ 195.00

Floppy Disc Box 10 \$ 25.00

Floppy Disc w/order \$ 19.90

BUSINESS SPECIAL

Includes 80 Column Z-80 Card • 16K Card • Wordstar • Supercalc

Special \$825.00

D.O.S. Programming SPECIAL

80 Column Card • Magicalc • Magic Window • Magic Speller • 16K Card **Special** .. \$449.00

3-CARD SYSTEM

80 col/16K card/Z-80 card **Special** ... \$329.95

MODEMS

Smartmodem 300 \$219.95

Smartmodem 1200 \$499.00

D-Cat Modem \$164.00

MONITORS

Nec Green \$110.00

Taxan Amber \$129.95

Taxan RGB color \$395.00

USI Hi/Res green \$141.95

80 COLUMN CARDS

Smarterm 11 \$129.00

Videx Video Term \$215.00

Ultra Term \$289.00

View Master \$141.95

Apple IIe 64K, 80 col. \$ 99.00

Z-80 CARDS

Microsoft Softcard \$229.95

Z-80 Plus \$125.00

Z-Card 11 \$131.95

EDUCATIONAL SOFTWARE

Spelling/Reading Primer \$ 29.95

Perception \$ 20.95

Counting Bee \$ 23.95

Word Scrambler \$ 15.95

Fractions \$ 36.95

Intro. Algebra \$ 21.95

Frenzy/Flip Flop \$ 25.95

Wordstar \$244.95

Spellstar \$159.95

WStar/MMerge \$395.00

WStar/SStar \$422.00

Supercal \$129.95

PSF File \$ 88.75

PSF Graph \$ 88.75

PSF Report \$ 88.75


PSF 3PAK \$246.75

All equipment shipped factory fresh. Manufacturers' warranties included. California customers add 6½% tax. Include payment by personal check, money order, or cashier's check with order and SGC will pay shipping charge. Call for amount of shipping charge when paying by credit card.

All items are normally in stock

(415) 490-3420

... And we'll be here to help after you receive your order. Feel free to call the SGC Technical Staff for assistance.



SGC

The mail order specialists

342 Quartz Circle, Livermore, CA 94550

MICRO™

CoCo Bits

by John Steiner



This month we will take a look at interfacing the Color Computer to a disk drive. Last month I promised a new phone number for the Dakota Database. It is 701-281-0233, and is available 24 hours a day, except for maintenance. Since mid-July, we have logged over 1000 calls, and have nearly fifty regular users. Most of the users have computers that are not CoCos. Lots of Osbornes and IBM machines check in daily, in addition to Model IIIs and several CoCos. There are even a few data terminals who make a regular appearance.

64K COCO

I have had a chance to check out the new 64K CoCo, and find it to be not much different from the older units. The new keyboard is nice, and is really the same style board with new keycaps. I like both keyboards very well, and prefer the new one, but those who like a longer throw on the keys should look into the Mark Data model, or one of the other professional keyboards.

The formatting problem I was working on last month has been solved. I found my drives to be out of time, just as was suggested to me. My drive zero was way off, and that was probably the majority of my initialization problems with the 1.1 ROM card. The ROM works well with either computer, and my old drives are purring again.

Interfacing a Drive Unit

I promised a look at drive interfacing with the CoCo, so let's take a look at what is required. First of all, any standard Model III drive will work on a CoCo if it or the cable has been configured properly. This opens up a wide market for drive selection, and CoCo users can either shop for price or quality or both. My BBS has two Tandon TM-100 drives which have performed 24 hours daily for over three months with no I/O errors. On top of that, they

are quiet, far quieter than the TEC drive that Radio Shack sells. I have also used the Teac drive units from J&M, and find them to be just as quiet as the Tandon. J&M feels the Teac drive is better for CoCo than the Tandon, but as a practical matter, either seem to work fine.

The Tandon drive is a popular unit, and available from many sources, so we will look at installing these units. The first requirement is a controller board. There are several different brands available, but only two that I know of that are compatible with the Radio Shack format. These are Shack's card and the J&M controller which I have talked about earlier. The Radio Shack card is available as a replacement part, and you can order a replacement case, putting a complete controller together.

The next requirement is a drive cable, which can be ordered from Radio Shack, or you can use any external drive cable for a Model III if you configure your drives [see below]. Drive cables are available either in two or four drive versions. The Color Computer drive cables are configured, which means that the cable determines which drive becomes drive zero, and which becomes drive one, etc. Many companies configure the drives, instead. Configuring the cables allows you to swap drives zero and one at any time without internal modification of the units. On the other hand, it is easier to configure the Tandon drive unit, than to configure the cable.

You can buy the configured cable from Radio Shack, or you can order an unconfigured cable from the place you get your Tandon drive units. My recommendation is to order a cable from the drive supplier that has gold plated connectors and configure your drives.

The Tandon TM-100 is a forty track single sided, double density drive. Having forty tracks is of no value to RS-DOS, which writes only to 35 tracks anyway, however if you have FLEX or

another operating system, you may be able to use those tracks by formatting your diskettes for forty track use. In FLEX, the NEWDISK command will allow you to specify number of tracks when it initializes a diskette.

Tandon sells their drives without case and power supply, so be sure to ask about this before you buy a drive unit. A bare drive can be found for around \$200, and a case and power supply will cost about \$50.00. The Dakota Database drive units are housed in a two drive case which cuts down on cost and space. If you are planning on two drives, you might look into that combination.

Drive Configuration

Configuring a Tandon drive is easy. The configuration process allows the controller card to distinguish between drive units. On the Tandon, the configuration is done by jumpering a programmable shunt socket. This 16 pin IC socket is located toward the right rear of the circuit board near the drive connector (See figure 1). Some companies provide a DIP shunt which is sitting in the socket, while others leave you to your own devices. If you did not receive a shunt, a common staple will perform the job quite satisfactorily. Figure two is a diagram and pinout of the socket.

Configuration is easy. Make sure to connect pins 9 and 8 together. This is done on all drives. To configure a drive as drive 0, connect pins 2 and 15. Drive 1 requires connections between 3 and 14. Drive 2 connections are to pins 4 and 13, while drive 3 connections are made to pins 5 and 12. Make sure no other pins are connected, except 9 and 8 and the desired drive number pins. Figure two shows the illustration for a drive 0. Once a drive is configured it can be used as that drive with either a configured or non-configured cable. To use a drive with a configured cable, just connect it as above. Configuration can be changed at any time, should you desire to switch drives.

One last comment, there is a terminator socket (marked 2F) on the circuit board, located near the edge connector. This contains a termination resistor pack. Remove the pack from the socket on drive 0, and any intermediate drives. Leave it in the last drive on the line. I have heard con-

(Continued on next page)

Figure 1


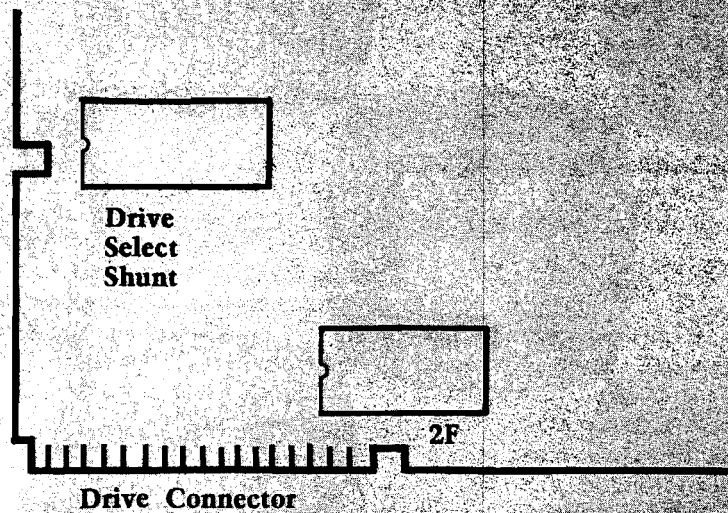


Figure 2



Listing 1

```

5 REM TAPE UTILITY
PATCH TO PROVIDE CON-
TINUOUS CASSETTE READ
7 REM BY KEN
CHRISTIANSEN
10 POKE &H0DF7,&H96
20 POKE &H0DF8,&H0
30 POKE &H0DF9,&H0B7
40 POKE &H0DFA,&H0FF
50 POKE &H0DFB,&H20
60 POKE &H0DFC,&H0BD
70 POKE &H0DFD,&H0A9
80 POKE &H0DFE,&H9E
90 POKE &H0DF7,&H39
100 POKE &H14E0,&H12
110 POKE &H14E1,&H12
120 POKE &H14E2,&H12
130 POKE &H14E3,&H12
140 POKE &H14E4,&H12
150 POKE &H14E5,&H12
160 POKE &H14E6,&H12
170 POKE &H14E7,&H0BD
180 POKE &H14E8,&H0D
190 POKE &H14E9,&H0F7
200 POKE &H1514,&H7E
210 POKE &H1515,&H14
220 POKE &H1516,&H63
230 POKE &H1288,&H7E
240 POKE &H1289,&H12
250 POKE &H128A,&H22
    
```

flicting information from different sources about this pack, with some people telling me it can be omitted from all drives. We have left it in our drive 1 without noting any adverse effects. If you have any information about this pack, drop me a line, we will pass it along.

We have installed several Tandon drive systems on both CoCo and J&M cards, and have had no problems. If you would like assistance or more information about drives, etc.; give me a call, or drop me a line. I will be glad to help. Send a stamped return envelope for a reply.

Tape Utility

One of the most used utilities in my software collection has been TAPE UTILITY from Spectrum Projects. The program is designed to make it easy to copy files from tape to tape, tape to disk, and vice versa. The programs most useful function is a disk to tape backup. The command BAC is used to transfer all disk files on a given disk to tape. Operation from that point is unattended, and in a little while, all disk files are on tape. There are commands to copy individual files from one media to the other, and a set of directory commands that allow printed and screen directories of both the disk and tape.

There is a tape to disk command that will copy the next tape file to disk, and present you with an option to continue or exit. The command works well, however if you want to dump an entire tape to diskette, you have to be around to prompt the computer to read in the next file. Ken Christiansen Fargo, ND passed along the following patch that will bypass the prompt and allow the computer to continue to read in tape files. The only disadvantage to this is that when the tape is finished, you have to stop the program with the RESET key.

If you are interested in a patch that will allow the program to work with disk 1.1 ROM, drop me a line with an SASE and cassette. Ken will give you a BASIC program to patch UTIL. Spectrum Projects tells me their latest version now checks for the ROM and will operate properly with either ROM installed. Two things Tape Utility will not do are copy protected programs or copy segmented binary files. It will copy any binary file that was created using CSAVEM.



You may contact Mr. Steiner at 508 Fourth Ave. NW, Riverside, ND 58078.



Sure it's insured?

SAFEWARESM Insurance provides full replacement of hardware, media and purchased software after a low \$50 deductible. As little as \$35/yr covers:

- Fire • Theft • Power Surges
- Earthquake • Water Damage • Auto Accident


Select the coverage you want from the table.

Amount of Insurance	Annual Premium
Up to \$ 2,000	\$ 35
\$ 2,001-\$ 5,000	\$ 60
\$ 5,001-\$ 8,000	\$ 75
\$ 8,001-\$11,000	\$ 90
\$11,001-\$14,000	\$105

Call for higher coverages.
Not avail. in AK, DC, HI, KY, LA, ME, MS, NV, SC, or WY.
Call for immediate protection.

1-800-848-3469

(In Ohio call 1-800-848-2112)




COLUMBIA NATIONAL GENERAL AGENCY



P.O. Box 4364
 Flint, Michigan 48504
 (313) 233-5731
 (313) 233-3125


ZANIM SYSTEMS

HOME CONTROL AT YOUR FINGERTIPS

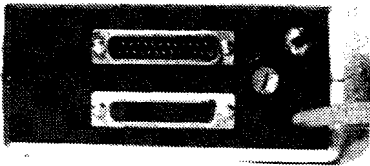


The ZCM-1 is the Master Control module that provides the interface between your computer and our line of Zanim Application Modules. Up to 15 Application Modules can be piggy-backed to the ZCM-1 Master Control module. The ZCM-1 is compatible with any standard RS-232 (serial) interface. A special Master Control module, the ZCM-1V is available for the VIC-20 and Commodore-64 computers.

*The ZCM-1V is available for VIC-20 and C-64 users.

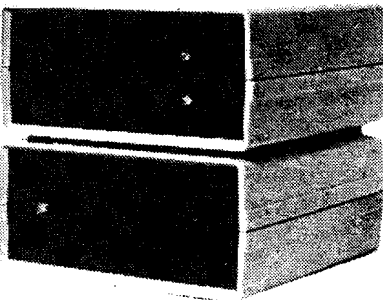


ZAM-1 is the home control interface module that provides a fully versatile computer controlled environment. ZAM-1 can control up to 256 different lamps and appliances in your home or business providing you with an effective and easy to implement energy management and electric control system. No special modifications are necessary to your building as all control signals are sent over your existing wiring. ZAM-1 can be programmed in BASIC or optional home control software is available. ZAM-1 requires one ZCM-1 Master Control module.

*The ZCM-1/ZCM-1V Master Control module is required to use the ZAM-1 Home Control module.

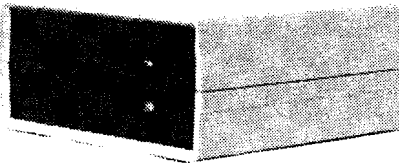

The ZAM-2 allows your computer to continuously monitor up to 15 different doors or windows around your home or business. ZAM-2 is a basic building block in a complete computer controlled home security system. With our ZAM-1 Home Control module, you can have a fully integrated security and environment control system. Upon an intrusion, your computer can take the action most appropriate, whether that is to ring an alarm bell, flash all the lights around your home, or dial the police.

*The ZCM-1/ZCM-1V Master Control module is required to use the ZAM-2 Security module.

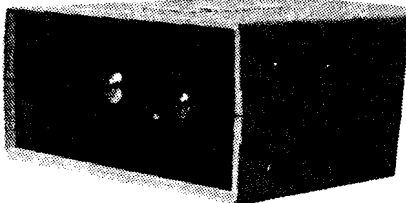

The ZAM-3 is a complete telephone answering and dialing system. It is capable of taking the phone off-hook and dialing a number under computer control or of answering the phone when it rings. With the ZAM-1 Home Control module and the ZAM-2 Security module, the ZAM-3 Phone Dialer module can be integrated into a complete home or business security/monitoring system. Applications include security, auto phone dialing, and computer-answering systems.

*Pulse dialing option is available as ZAM-3P.


*The ZCM-1/ZCM-1V Master Control module is required to use the ZAM-3/ZAM-3P Phone Dialer module.

SERIAL OR PARALLEL (CENTRONICS) PORT SWITCHER



**DOES YOUR COMPUTER
LOOK LIKE THIS?**

**A PORT SWITCHER NOW
AVAILABLE FOR YOUR
COMPUTER (ZSW1)**



P.O. BOX 4364
 Flint, Michigan 48504
 (313) 233-5731
 (313) 233-3125

Please send me more information or catalogue!

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

What Make/Model Computer do you own?

MICRO™ TRS-80C Reviews



Product Name: C.C. Calc Disk Version
Equip. req'd: TRS-80 Color Computer 32K
Price: \$25.00 tape or disk
Manufacturer: Transformation Technologies
 194 Lockwood Lane
 Bloomingdale, IL 60108

Description: *C.C. Calc* is an electronic spreadsheet for the Color Computer. The program provides many of the spreadsheet features found on much more expensive software packages. The spread sheet is 26 x 26, which allows 676 cells. Like most spreadsheets, cells can contain labels, formulas or values. One powerful feature is the ability of a cell to contain both a label and a value. This effectively gives a larger sheet as formulas can be hidden under labels. The smaller size and format allows the personal computer user access to a power spreadsheet.

Pluses: One sheet can be merged with another, allowing the creation of larger effective files. Program documentation includes data file configuration, allowing you to read and write data in your own BASIC programs. Files on the disk version can be loaded with only a single key. The program is very powerful considering its low purchase price.

Minuses: Recalculations are not done automatically, you must recalculate each time data is changed. Because the program is in BASIC, recalculation takes a minimum of eight seconds. Parentheses are not evaluated within formulas, so care must be exercised as to proper formula layout.

Documentation: Seventeen pages of documentation and two sample spreadsheets accompany the software. The documentation is thorough, and allows the creation of usable spreadsheets in a short period of time. Users of Visicalc will find many similar commands and capabilities, only on a smaller scale.

Skill level required: Though I have never used a spreadsheet program before, I was easily tutored, and found operation of the program quite easy to learn and use.

Reviewer: John Steiner

Product Name: Disassembler for 6809
Equip. req'd: 6809 computer w/Flex
Price: \$75.00
Manufacturer: Granite Computer Systems
 Route 2 Box 445
 Hillsboro, NH 03244
Author: Gilman C. Shattuck

Description: A menu driven 6809 disassembler with user symbol tables. Creates source files compatible with the TSC Editor/Assembler. Output can be to the screen, printer, disk or tape. It has look-up table for Flex and Monitor references, local and global labels and expressions, and equate table for all external references. There is an option for single-step disassembly, data areas are user definable, the program is supplied on 5 or 8 inch disks or tape.

Pluses: The disassembler is menu driven making the use simple and direct. The program is very fast and offers many options for changing data areas, labels, equates, and output. The output listing is the same format as the TSC Assembler and the disk output can be used as input for the assembler. Input is carefully screened to eliminate mistakes.

Minuses: You must have the program loaded before calling the disassembler.

Documentation: The 12 page guide is well written, although a little brief. It describes the menu functions, gives some hints on disassembly and lists some references for more in-depth study.

Skill level required: The documentation assumes familiarity with 6809 machine language programming.

Reviewer: Phil Daley

Product Name: TRS-80 Model 100 portable computer
Equip. req'd: 4 AA batteries [\$3.00]
Price: 8K \$799, 24K \$999
Manufacturer: Tandy Corporation
 Fort Worth, TX

Description: Gets my vote for product of the year! A truly useful portable computer. Includes all needed software and hardware interfaces for effective use alone or with other computers. 90 day limited warranty. Highly recommended.

Pluses: CMOS 80C85 processor and memory allows up to 20 hours of operation at 2.4MH without a cord. Large 8 line by 40 column LCD display is easily usable indoors and out. Includes full-size full-stroke keyboard, able to generate all ASCII codes, character and high-resolution graphics, and emulate a numeric keypad. Alpha lock, function keys, and cursor controls also supported. Interfaces include a 300 cursor controls also supported. Interfaces in-

clude a 300 baud modem (direct connect cable \$20, acoustic coupler planned), RS232 and Centronics parallel ports (cable \$15), and a 1500 baud cassette interface (cable \$6), as well as sockets for added RAM, ROM and an expansion bus.

Software is fully integrated, menu-driven and supported by function keys, providing ease-of-use comparable to Apple's "LISA" at 1/10th the price. The built-in word processor is simple but elegant, with all needed features. The smart terminal is entirely adequate for even serious use, as is the highly-extended Microsoft BASIC. A primitive address list and notebook are also included.

Minuses: Cursor controls are not supported from BASIC, and line-feeds after carriage returns are not selectable. The quick reference manual and the LCD display could use protective covers, and a built-in microcassette recorder and TV output would be welcome.

Documentation: Comes with a tiny quick reference manual and large spiral-bound user guide with index. Includes enough information in the first few pages to use all programs effectively, and covers all details of use later in a format that is ideal for reference. Does not attempt to teach BASIC to beginners.

Skill level required: My 7 year old used it easily the first day. What more can I say?

Reviewer: Jim Strasma


Product Name: 64K Disk Utility Package
Equip. req'd: TRS-80 Color Computer Disk system 64K
Price: \$21.95 + \$3.00 shipping
Manufacturer: Spectrum Projects
 93-15 86th Drive
 Woodhaven, NY 11421

Description: The 64K disk utility package is a collection of three useful programs for the 64K Color Computer. Now that Tandy is producing a 64K compatible computer, and many users are upgrading their machines to support 64K, commercial software is starting to use the capacity. The program includes 40K, ROMCRACK, and a print spooler. 40K is a program that moves BASIC from ROM to RAM, and relocates it so that your BASIC programs have access to larger data areas. ROMCRACK will transfer ROMpacks to disks, and the software spooler will allow you to run and use BASIC while the printer is getting spooled output from a buffer in upper memory.

Pluses: 40K provides extra data storage area for large string arrays, etc. The print spooler will allow you to continue programming or working with your computer while printing from a large buffer in the upper RAM. ROMCRACK will transfer most ROMpacks to disk with very little hassle.

Minuses: 40K has a limiting factor in program size, and the extra memory must be used as variable and string space, or the program could crash. The print spooler works

(Continued on next page)



Dealer
Inquiries
Invited

COMPLETE PRODUCT LINES FOR
 D.C. Hayes • HDE • Microsoft • Nashua • Okidata

APPLE • FRANKLIN • IBM-PC/XT

We carry many products at competitive prices to expand these fine computers.
 Request Catalog No. AFP*

HDE • AIM • SYM • KIM

HDE hardware and software for ASK, DLC, OMNI-65 systems
 KIM replacement modules (1K — 4K) and keyboards
 AIM-65 (1K — 4K) and accessories. Request Catalog No. TASK*

COMPUTER REPAIR SERVICE

Professional Workmanship
 Guaranteed Repairs
 Quick Turn-around

Apple	•	Franklin	•	Atari
		PET	•	HDE
AIM	•	SYM	•	KIM

Perry Peripherals

*Catalogs
 AFP \$2.00 TASK \$1.50
 Catalog price refunded
 with first order

Repair Center
 6 Brookhaven Drive
 Rocky Point, NY 11778

P.O. Box 924
 Miller Place NY 11764

Orders
 (516) 744-6462
 9AM—5PM Weekdays

well with three reservations, it must be available by the time you read this. It slows the computer down, programs run slightly slower. Lastly, the program data being spooled must use BASIC's character output routine [not usually a problem]. ROMCRACK won't handle some ROM packs that test to see if the program is residing in RAM before executing. Some packs fit this category.

Documentation: A single sheet of information instructs thoroughly in the operation of the three utilities.

Skill level required: These utilities are for the average BASIC programmer, no great skills are required of the user.

Reviewer: John Steiner

Product Name: Disk COLORCOM/E Smart Terminal Software

Equip. req'd: TRS-80/TDP 100 Color Computer/MODEM

Price: \$49.95 + \$2.00 shipping

Manufacturer: Eigen Systems
P.O. Box 10234
Austin, TX 78766

Description: The Disk COLORCOM/E Smart Terminal program is a sophisticated terminal program that supports up/down loading, disk files, and a full complement of RS-232 functions and features.

Pluses: The program is easy to use, and very sophisticated. It is menu driven, and the user can set up just about every possible printer/modem computer parameter desired. All 127 ASCII codes may be sent from the keyboard. The receiver buffer can be opened for saving of data, and closed as desired if you decide to eliminate excess information from your disk. The software handles graphics characters easily, and does an impressive job on Spectrum Projects BBS graphics displays. Initialization files can be saved and loaded for maximum convenience.

Minuses: The software comes on a copy protected diskette, so you must load and run the program from it, transferring to a file disk when loading is complete.

Documentation: A 23-page manual is included that steps the user through the program with ease. Some functions needed further explanation for me, for example, "capture characters".

Skill level required: The program is easy to learn, and beginners can use it with little trouble, ignoring its advanced features. As the user becomes more expert, the extra capability can be put to use.

Reviewer: John Steiner

MICRO

SYM[®]

THE SYSTEM

AIM[®]

DUAL ACIA BOARD

Essential for telecommunications. Two independent full duplex RS232 channels. Uses 6551 ACIAs. Crystal-driven TTL clock. Supports TTL level or RS232C (+/-12v). Supports all standard baud rates to 19,200. Can support interrupt-driven I/O. Demonstration source code provided.

COM-1

\$139



REAL-TIME CLOCK/CALENDAR

Demonstration software with source and data sheet. Uses the OKI MSM5832. Provision for user-supplied battery backup. On board crystal for accurate timekeeping. CMOS circuitry - Low power Year, month, date, day-of-week, hours, minutes & seconds! 12/24 hour - Leap Year correction 4 interrupt rates available.

CLK-1

\$60

I/O EXPANSION BOARD

For microcomputers that use 6522 VIAs for I/O and do not provide full address decoding on board. This board has physical space for four additional 6522 VIAs, and provides additional decoding for a total of 16 devices. Two versions of this board are available. The I/OX-122 mounts above, and directly plugs into, an on-board 6522 socket, and relocates the original VIA to the expansion board. Where there are space limitations, the I/OX-222 uses a dip header and an 8" cable for remote installation.

I/OX-122 \$60

I/OX-222 \$72

EPROM PROGRAMMER


Particular combination of hardware and software (machine language) used results in VERY LOW programming overhead. Flexible design; supports future EPROM designs. Will program EPROMS up to 256K bits (32K bytes). Programs all these EPROMS:

2508, 2516, 2532, 2564, 2758A, 2758B, 2716, 27C16, 2732, 2732A, 27C32, 2764, 27C64, 27128, MCM68764

All personality modules INCLUDED. Menu driven program for easy operation.

PRG-1

\$250



32K CMOS STATIC RAM BOARD

Models MB-132/32K, \$299
/16K \$241./8K \$197

Features:

- 200ns Low Power CMOS, STATIC RAM
- Extends your expansion connector
- Plug compatible with 2716 EPROMS
- First 8K are jumper selectable
- Entire board may be bank-switched

All boards feature G-10 glass/epoxy, solder mask, and gold plated connectors. All boards carry a full 1-year limited warranty. When ordering specify SYM or AIM version; add S & H in U.S. and Canada \$2.50, overseas \$4.00 (US). Calif. residents add sales tax.




ALTERNATIVE ENERGY PRODUCTS

Dealer and Distributor Inquiries Invited.

P.O. Box 1019 • Whittier, CA 90609

(213) 941-1383

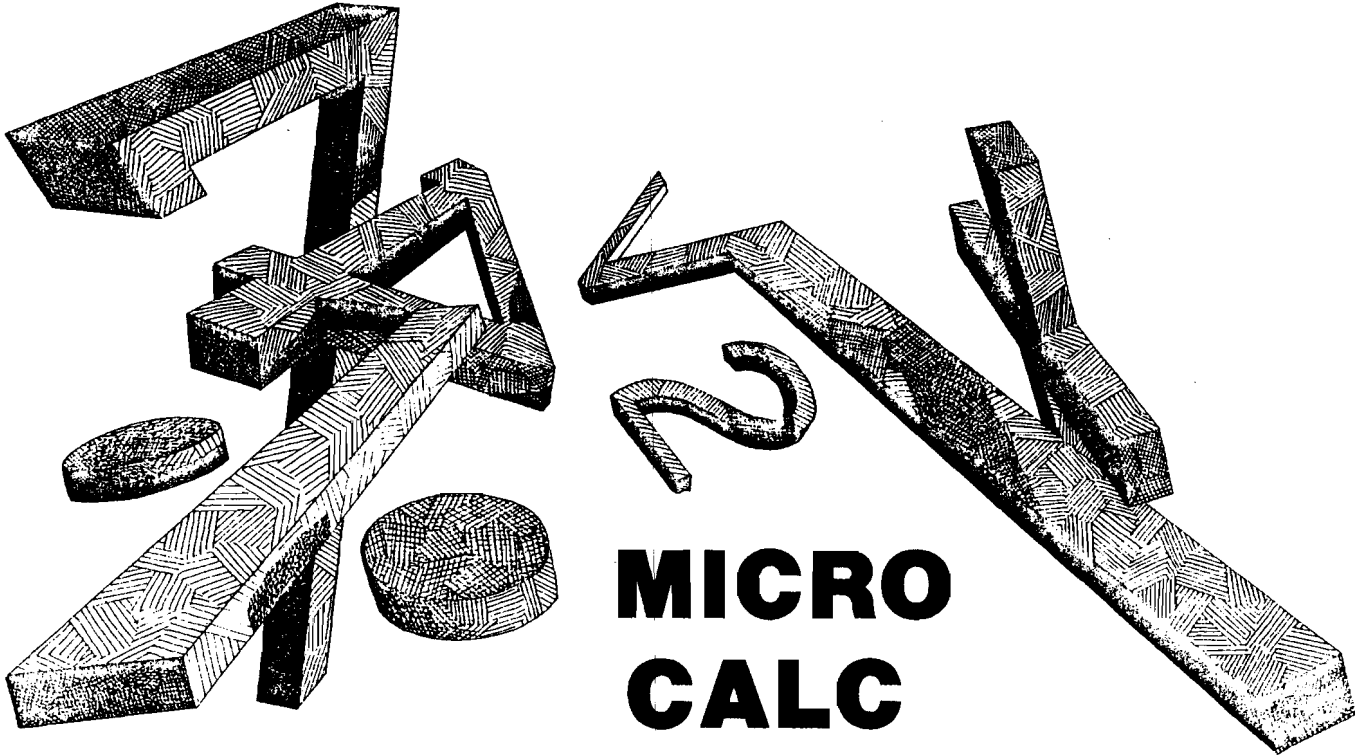

MICRO CALC

by Tom Marshall

Comments on Atari listings

Starting this month, our Atari listings are being output on the EPSON FX-80 printer. This printer allows redefining some or all of the Epson ROM character set. After much testing, we arrived at a compromise set of characters. Since many of the reversed characters would be difficult to read at the size of these listings, we thought that it would be clearer for the reader typing these programs into his computer to underline the reversed characters. The Atari programs that follow utilize this new style of listing. If anyone has any comments, pro or con, drop us a line with your viewpoint.

Features:

- ✓ 24 working lines
- ✓ 24 corresponding comment fields
- ✓ support of disk or tape files
- ✓ multiple statement support
- ✓ BASIC screen editing features

Operating Instructions

- ESC START performs calculations
- ESC OPTION enters file mode
- ESC SELECT enters comment field
- Shift CLEAR clears screen

Listing 1

```

3 REM MCALE
4 REM
9 POKE 106,PEEK(106)-4:GRAPHICS 0
10 DIM TBLO(255),STO$(800),DX(3),DY(3),TEMPO$(200)
   ,ULO$(25),FO$(15),MO$(54),QMO(20),SPACE$(40)
20 GOSUB 30000:GOTO 300
100 GET #1,C0:TYO=TBLO(C0):IF NOT (TYO) THEN 100
110 ON TYO GOTO 120,130,200,140,160,150,170
120 POSITION X0,Y0:PRINT CHR$(C0);:PO=(Y0-1)*40+X0+1:
   STO$(PO,P0)=CHR$(C0):X0=X0+1-LLO*(X0=MAX0):
   GOTO 100
130 X0=X0+DX0(C0-28):Y0=Y0+DY0(C0-28):
   IF X0<MAX0-LLO+1 THEN X0=MAX0
132 IF X0>MAX0 THEN X0=MAX0-LLO+1
134 IF Y0<1 THEN Y0=20
136 IF Y0>20 THEN Y0=1
138 POSITION X0,Y0:PRINT " * ";:GOTO 100
140 X0=X0-1+LLO*(X0=MAX0-LLO+1):POSITION X0,Y0:
   PRINT " _ ";:PO=(Y0-1)*40+X0+1:STO$(PO,P0)=" ":
   GOTO 100
150 X0=MAX0-LLO+1:Y0=Y0+1-20*(Y0=20):POSITION X0,Y0:
   PRINT " _ ";:GOTO 100
160 POSITION X0,Y0:PRINT "? ";:X0=X0+1-LLO*(X0=MAX0):
   IF X0<>MAX0 THEN PRINT ULO$(1,MAX0-X0+1);
162 PO=(Y0-1)*40+X0:STO$(PO,P0)="?":QMO(Y0)=PO:
   POSITION X0,Y0:PRINT " * ";:GOTO 100
170 POSITION 0,22:PRINT "D Clear screen:
   Are you sure...?";:GET #1,C0:
   IF CHR$(C0)<>"Y" THEN 300
172 FOR Q0=1 TO 20:POSITION 1,Q0:
   PRINT ULO$(1,11);" ";ULO$(1,25):NEXT Q0
174 STO$=" ":STO$(800)=" ":STO$(2)=STO$:GOTO 300

```

(Continued on page 82)

Hewlett Packard


Write or call for prices.



SPECIALS on INTEGRATED CIRCUITS

6502	7.45	10/ 6.95	50/ 6.55	100/ 6.15
6502A/6512A	8.40	10/ 7.95	50/ 7.35	100/ 6.90
6520 PIA	5.15	10/ 4.90	50/ 4.45	100/ 4.15
6522 VIA	6.45	10/ 6.10	50/ 5.75	100/ 5.45
6532	7.90	10/ 7.40	50/ 7.00	100/ 6.60
2114-L200	2.45	25/ 2.30	100/ 2.15	
2716 EPROM	4.45	5/ 4.20	10/ 3.95	
2532 EPROM	5.90	5/ 5.75	10/ 5.45	
6116 2Kx8 CMOS RAM	6.45	5/ 6.20	10/ 5.95	
4116 RAM			8 for 14	
4164 RAM			6.50	
Zero Insertion Force 24 pin Socket (Scanbe)			2.00	

Anchor Automation Signalman Modems



FREE SOURCE MEMBERSHIP WITH SIGNALMAN
All Signalman Modems are Direct Connect, and include cables to connect to your computer and to the telephone. Signalman Modems provide the best price-performance values.

Dealer and OEM inquiries invited

Volkmodem	(79)	59
RS232 or Atari Cable for Volkmodem		9
Mark VI for IBM Personal Computer	(279)	179
Mark VII Auto Dial/Auto Answer	(159)	99
Mark XII Smart Model 1200/300	(399)	299
DC HAYES Smartmodem		219
DC Hayes Smartmodem 1200/300		529



PROM QUEEN for VIC	170
Apple Emulator for Commodore 64	Call
STAT Statistics Package for C64	95
Solid Oak 2 Level Stand for C64 or VIC	29
C64/VIC Switch (networking)	125
BACKUP V1.0 tape copier for C64 or VIC	20
CARDBOARD/6 Motherboard - VIC	64
CARDBOARD/5 Motherboard - C64	56
CARD PRINT G Printer Int. with Graphics	72
CARD PRINT B Printer Interface—C64/VIC	40
CARDBOARD/3s Motherboard - VIC	22
CARDCO C64/VIC Calculator Keypad	32
CARDRAM/16 RAM Expansion - VIC	44
Complete CARDCO Line in stock	
CIE and VIE IEEE Interfaces in stock	
MSD SuperDrive for C64 or IEEE	365
MAE Assembler for C64	50

APPLE—FRANKLIN ITEMS

KRAFT Apple Joystick	40
Kraft Apple Paddle Pair	30
SPINNAKER Software in stock	
Broderbund Software in stock	
16K RAM Card for Apple	59
MultiPlan—Microsoft	185
Solid Oak 2 Level Stand for Apple	29
Serial Card for Apple	99
MCP RAM/80 column card for IIe (AP/TXT)	139
Z80 Softcard and CP/M (Microsoft)	235
RANA Elite I with Controller	389
Parallel Printer Interface/Cable	69
Microtek Interfaces in stock	
Apple Dumping with 16K Buffer	160
Grappler + Interface	129
Kraft Products for Apple in stock	
DC Hayes Micromodem II	299
PFS: File	95
PFS: Report	95
Videx 80 Column Card	209
Hayden Software for Apple 20% OFF	
Apple Blue Book	19

Commodore

See us for Personal, Business, and Educational requirements. Educational Discounts available.

PETSCAN I \$245 base price

Allows you to connect up to 30 CBM/PET Computers to shared disk drives and printers. Completely transparent to the user. Perfect for schools or multiple word processing configurations. Base configuration supports 2 computers. Additional computer hookups \$100 each.

COMPACT/STCP \$115

Intelligent Terminal Package for PET, CBM, C64
Includes ACIA Hardware / STCP Software

VIC/C64 Switch—Networking 125
Allows 8 computers to share drive and printer.

SCREENMAKER 80Column Adapter for C 64 145
Provides big screen capability for business applications.

GENESIS Computer Corp
VICcontroller (for C64 as well) 50
combine with BSR modules for home or business control

COMSENSE Remote Sensing Adapter for C64 or VIC 35
COM VOICE Synthesizer for C64 or VIC 139
includes software for text to speech, pitch, etc.

COM CLOCK Real Time Clock with battery backup 45

VIC 20 Products and Software in stock

Thorn EMI Software	UMI Software
ABACUS Software	HES Software
16K RAM for VIC	64 Vanilla Pilot
	27

VICTORY Software for VIC and C 64			
Street Sweepers (VIC)	12	Kongo Kong (VIC)	16
Night Rider (VIC)	11	Cosmic Debris (VIC)	12
Annihilator	16	Adventure Pack I	16
Adventure Pack II	16	Metamorphosis	11
Educational Pack I	11	Trek	12
Strategy Pack I	16	Grave Robbers	12

PAPER CLIP Word Processor	109
ORACLE Data Base from Batteries Included	125
Super BusCard from Batteries Included	179
Commodore 64 Programmers Reference Guide	16
MicroChess for C64—8 levels of play	19

excellent graphics and color

SPINNAKER Software C64, Apple, IBM, Atari
Computer's First Book of PET/CBM
C64 or VIC SWITCH 125

POWER ROM Utilities for PET/CBM 78
WordPro 3+/64 with Spellmaster 85

WordPro 4+ - 8032 disk, printer 279
SPELLMASTER spelling checker for WordPro

VISICALC for PET, ATARI, or Apple 189
PET-TRAX Pet to Epson Graphics Software 40

SM-KIT enhanced PET/CBM ROM Utilities 40
Programmers Toolkit - PET ROM Utilities 35

Calc Result Advanced—C 64 135
EASY CALC for C64 65

PET Spacemaker II ROM Switch 36
COPYWRITER Word Processor for C64 49

2 Meter PET to IEEE or IEEE to IEEE Cable 40
Dust Cover for PET, CBM, 4040, or 8050 8

CmC Interfaces (ADA1800, ADA1450, SADI in stock)
Programming the PET/CBM (Computer) — R West 20

Compute! First Book of VIC 11
OMNICALC (HES) 79

HES MODEM with Software 65
HES Software and Hardware in stock

UMI products in stock

FlexFile for PET/CBM/ C64 \$110
Database, Report Writer with calculations, Mailing Lists.

FORTH for PET/C64 full FIG model — Cargill/Riley \$50
Metacompiler for FORTH for independent object code 30

KMM PASCAL IV.1 for PET/C64 99
EARL for PET/CBM Disk-based ASSEMBLER 65

Super Graphics — BASIC Language Extensions 45
Fast machine language graphics routines for PET/CBM

RAM/ROM for PET/CBM 4K \$75 8K \$90
Commodore Public Domain Software for C64 75

DISK SPECIALS



Scotch (3M) 5" ss/dd	10/ 2.20	50/ 2.00	100/ 1.95
Scotch (3M) 5" ds/dd	10/ 3.05	50/ 2.80	100/ 2.75
Scotch (3M) 8" ss/ss	10/ 2.30	50/ 2.10	100/ 2.06
Scotch (3M) 8" ss/dd	10/ 2.85	50/ 2.70	100/ 2.65

We stock VERBATIM DISKS

Write for Dealer and OEM prices.

Sentinal 5" ss/dd	10/ 1.90	50/ 1.85	100/ 1.80
Sentinal 5" ds/dd	10/ 2.55	50/ 2.50	100/ 2.45

We stock Dysan disks

Wabash 5" ss/dd	10/ 1.60	50/ 1.55	100/ 1.45
Wabash 5" ss/dd	10/ 1.90	50/ 1.85	100/ 1.75
Wabash 8" ss/ss	10/ 2.00	50/ 1.95	100/ 1.85

We stock MAXELL DISKS

Write for dealer and OEM prices.

Disk Storage Pages	10 for \$5	Hub Rings 50 for \$6
Disk Library Cases	8"—3.00	5"—2.25
Head Cleaning Kits	11	

CASSETTE TAPES—AGFA PE-611 PREMIUM

C-10	10/ .61	50/ .58	100/ .50
C-30	10/ .85	50/ .82	100/ .70

DATASHIELD BACKUP POWER SOURCE \$265

Battery back up Uninterruptible Power Supply with surge and noise filtering. The answer to your power problems.

MultiPlan—IBM or Apple 185
Quadboard for IBM available

Peachtext 5000 Software Package 219

PFS Software for IBM and Apple in stock

VOTRAX Personal Speech System 280
BMC 9191 Color Monitor 229

BMC 12A 12" Green Monitor 85
Dynax (Brether) DX-15 Daisy Wheel Printer 469

Itoh Prowriter Parallel Printer 379
Panasonic 1090 Printer with Correspondence Mode

Daisywriter 2000 with 48K buffer 1050
Gemini 10X 299

EPSON, Okidata, other printers in stock

USI CompuMOD 4 R F Modulator 29
We Stock AMDEK Monitors

Amdek DXY-100 Plotter 590
A P Products 15% OFF

Watanabe Intelligent Plotter 990 6-pen 1290
BROOKS 6 Outlet Surge Suppressor/Noise Filter 54

Electrohome 1302-2 13" Hi-res RGB Monitor 335
Panasonic 12" Monitor (20 MHz) with audio 139

Synortek SYM-1 Microcomputer 189

ALL BOOK and SOFTWARE PRICES DISCOUNTED

USI Video Monitors—Green or AMBER 20 MHz hi-res.
Dealer and OEM inquiries invited

ZENITH data systems

ZVM-122A	109	ZVM-123G	99
ZVM-131	300	ZVM-135	510
HERO 1 Robot (factory assembled)			2145
Z29 Terminal (DEC and ADM compatible)			680
ZT-10 Intel. Terminal with Serial Port			340
Z100 16-bit/8-bit Systems			CALL

We stock entire Zenith line.



WE STOCK ENTIRE LINE—write for prices.
SPINNAKER and Broderbund Software in Stock

215-822-7727
252 Bethlehem Pike
Colmar, PA 18915

A B Computers

WRITE FOR CATALOG. Add \$1.50 per order for United Parcel. We pay balance of UPS surface shipping charges on all prepaid orders (add extra for mail, APO/FPO, air). Prices include cash discount. Regular prices slightly higher. Prices subject to change.

Listing 1 (continued)

```


200 POKE 752,1:POSITION 0,22:
  PRINT "Q ..SELECT, OPTION, or START ..";
  POKE 752,0
210 CON0=PEEK(53279):IF CON0=7 THEN 210
220 IF CON0=6 THEN 1000:REM START
222 IF CON0=5 THEN 250:REM .SELECT
224 IF CON0=3 THEN 2000:REM OPTION
226 GOTO 210
250 IF LL0=25 THEN LL0=11:MAX0=11:X0=1:GOTO 300
260 LL0=25:MAX0=38:X0=14
300 POSITION 0,22:POKE 752,1:
  IF MAX0=11 THEN PRINT "Q Editing comment C
  field.":POKE 752,0:GOTO 320
310 PRINT "Q Editing expression field.":POKE 752,0
320 POSITION X0,Y0:PRINT "+*";:GOTO 100
1000 QL0=PEEK(88):QM0=PEEK(89):POKE 752,1
1100 FOR Q0=1 TO 800 STEP 40
1102 GOSUB 1950:POSITION 13,INT(Q0/40):
  PRINT " *+>+* ";
1103 IF ST0$(Q0+14,Q0+38)=SPACE$(1,25)
  THEN POSITION 14,INT(Q0/40)+1:PRINT UL0$(1,25):
  GOTO 1290
1104 FOR QQ0=38 TO 14 STEP -1:
  IF ST0$(Q0+QQ0,Q0+QQ0)=" " THEN NEXT QQ0:
  GOTO 1108
1105 IF QQ0=38 THEN 1108
1106 POSITION QQ0+1,INT(Q0/40)+1:PRINT UL0$(1,38-QQ0);
1108 GOSUB 1960:POKE START0,0:
  U0=USR(ADR(M0$),START0,START0+1,959)
1110 P0=QM0(INT(Q0/40)+1):IF ST0$(P0,P0)="?" THEN 1200
1120 POSITION 0,4:PRINT ST0$(Q0+14,Q0+38):? :? :
  PRINT "CONT"
1130 POSITION 0,0:TRAP 1900:POKE 842,13:STOP
1140 POKE 842,12:IF PEEK(START0+200)<>0 THEN 1990
1150 GOTO 1290
1200 POSITION 0,4:
  PRINT "A990=";ST0$(Q0+14,QM0(INT(Q0/40)+1)-1):? :
  ? :PRINT "CONT"
1210 POSITION 0,0:TRAP 1900:POKE 842,13:STOP
1215 POKE 842,12:IF PEEK(START0+200)<>0 THEN 1990
1220 GOSUB 1950:
  POSITION 39-LEN(STR$(A990)),INT(Q0/40)+1:
  PRINT A990;:GOSUB 1960
1290 NEXT Q0:POKE 752,0
1300 GOSUB 1950:POSITION 13,INT(Q0/40):PRINT " ";:
  POKE 752,0:GOTO 300
1900 GOSUB 1950
1902 POKE 842,12:POSITION 0,22:
  PRINT "Q ?Error ";PEEK(195);" at line ";
  INT(Q0/40)+1;".":POKE 752,0
1910 X0=MAX0-LL0+1:Y0=INT(Q0/40)+1:POSITION X0,Y0:
  PRINT "+*";:GOTO 100
1950 POKE 88,QL0:POKE 89,QM0:RETURN
1960 POKE 88,L0:POKE 89,M0:RETURN
1990 GOSUB 1950:POSITION 0,22:
  PRINT "Q ?Syntax Error at line ";INT(Q0/40)+1;
  ".":POKE 752,0:GOTO 1910
2000 POKE 752,1:POSITION 0,22:
  PRINT "Q.(S) to save, (L) to load (E) to edit..";
  :POKE 752,0
2010 GET #1,C0:
  IF CHR$(C0)<>"S" AND CHR$(C0)<>"L" AND CHR$(C0)

```

```

<>"E" THEN 2010
2030 IF CHR$(C0)="E" THEN 300
2050 POSITION 0,22:PRINT "Q Enter filename...";:
  INPUT F0$:TRAP 2900
2060 IF CHR$(C0)="S" THEN 2200
2100 ST0$=" ":ST0$(800)=" ":ST0$(2)=ST0$:ST0$=""
2110 OPEN #2,4,0,F0$
2120 FOR Q0=1 TO 4:INPUT #2,TEMPO$:
  ST0$(LEN(ST0$)+1)=TEMPO$:NEXT Q0
2122 FOR Q0=1 TO 20:INPUT #2,QM0:QM0(Q0)=QM0:NEXT Q0
2130 CLOSE #2:TRAP 65535
2150 FOR Q0=1 TO 800 STEP 40
2152 POSITION 1,INT(Q0/40)+1:FOR QQ0=11 TO 1 STEP -1:
  IF ST0$(Q0+QQ0,Q0+QQ0)=" " THEN NEXT QQ0:
  ? UL0$(1,11);:GOTO 2162
2154 PRINT ST0$(Q0+1,Q0+QQ0);:
  IF QQ0<11 THEN PRINT UL0$(1,11-QQ0);
2160 POSITION 14,INT(Q0/40)+1:FOR QQ0=38 TO 14 STEP -1:
  IF ST0$(Q0+QQ0,Q0+QQ0)=" " THEN NEXT QQ0:
  ? UL0$(1,25);:GOTO 2170
2162 PRINT ST0$(Q0+14,Q0+QQ0);:
  IF QQ0<38 THEN PRINT UL0$(1,38-QQ0)
2164 IF Q0/40=INT(Q0/40) THEN PRINT
2170 NEXT Q0
2180 LL0=25:MAX0=38:Y0=1:X0=14:GOTO 300
2200 OPEN #2,8,0,F0$
2210 FOR Q0=0 TO 3:PRINT #2;ST0$(Q0*200+1,Q0*200+200):
  NEXT Q0
2212 FOR Q0=1 TO 20:PRINT #2;QM0(Q0):NEXT Q0
2220 CLOSE #2:TRAP 65535:GOTO 300
2900 TRAP 65535:POSITION 0,22:
  PRINT "Q ?File input/output error..."
2910 FOR Q0=1 TO 200:NEXT Q0:GOTO 2000
30000 REM ---INIT---
30010 M0=PEEK(106):L0=0:START0=256*M0
30020 FOR Q0=0 TO 26:TBL0(Q0)=0:NEXT Q0
30022 FOR Q0=32 TO 94:TBL0(Q0)=1:NEXT Q0
30024 FOR Q0=95 TO 255:TBL0(Q0)=0:NEXT Q0
30026 FOR Q0=28 TO 31:TBL0(Q0)=2:NEXT Q0
30028 TBL0(27)=3:TBL0(126)=4:TBL0(63)=5:TBL0(155)=6:
  TBL0(125)=7
30030 LL0=25:MAX0=38:Y0=1:X0=14
30040 FOR Q0=0 TO 3:READ DX0,DY0:DX0(Q0)=DX0:
  DY0(Q0)=DY0:NEXT Q0
30042 READ M0$:POKE START0,0:
  U0=USR(ADR(M0$),START0,START0+1,959)
30050 UL0$=""
30052 ST0$=" ":ST0$(800)=" ":ST0$(2)=ST0$
30054 SPACE$=""
30060 FOR Q0=1 TO 20:QM0(Q0)=(Q0-1)*40+30:NEXT Q0
30080 OPEN #1,4,0,"K:"
30088 POKE 82,0:POKE 752,1:FOR Q0=1 TO 20:
  POSITION 0,Q0:PRINT " ";UL0$(1,11);" ";UL0$:
  NEXT Q0
30090 POKE 752,0:POSITION X0,Y0:? "+*";:RETURN
32000 REM ---ARROW DISPLACEMENTS---
32010 DATA 0,-1,0,1,-1,0,1,0
32100 REM ---6502 MOVE (FILL)---
32110 DATA
  hh, ,h, ,kh, ,nh, ,ph, ,to , *lk, ,mkp, hl, ,mp, ,fn, ,fo, ,zid, ,p, ,pzd,
  PP00

```

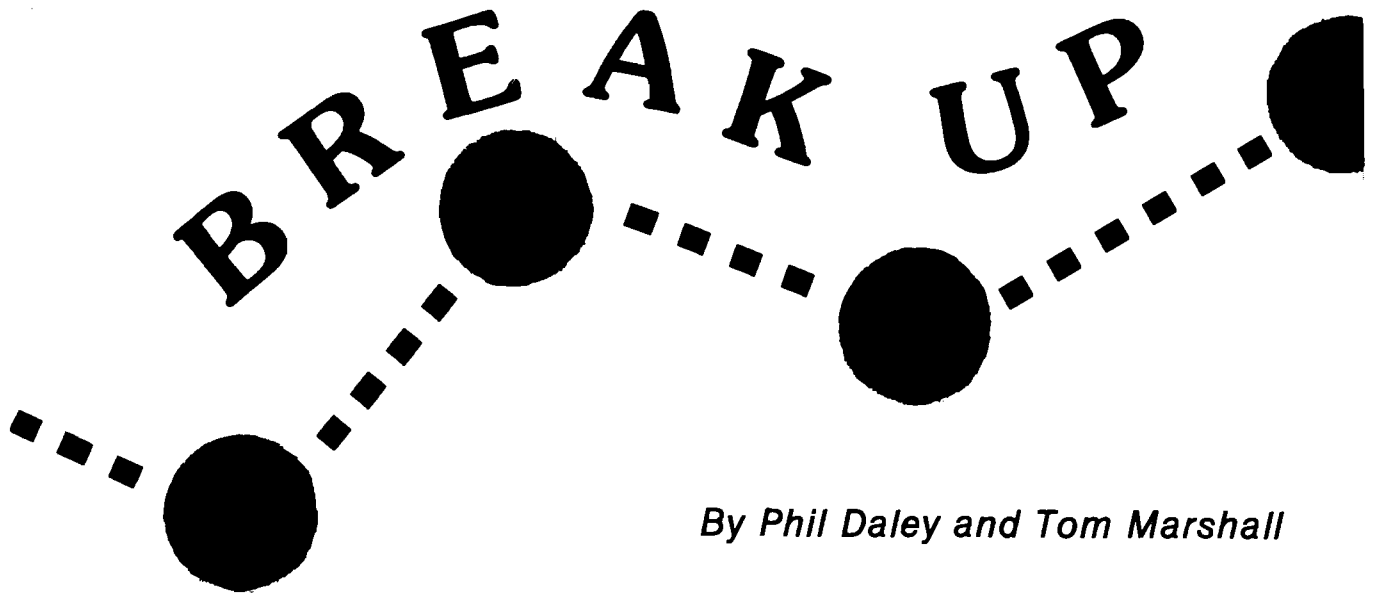

By Phil Daley and Tom Marshall

A simple animation demonstration of BREAKUP, featuring a bouncing ball and a player-controlled bumper.

A Brick Wall Demonstration

Get ready to hit the bouncing ball with your bumper and knock out a few bricks. The farther away the brick is, the more points you will get for knocking it out. If you are dexterous enough to knock out the entire wall of bricks, don't get over confident, the game will continue with an even harder screen of bricks.

Breakup is a simple graphics display game that presents the principles of animation with player/missile graphics to move characters on the screen and test for collisions. It includes a "ball" that moves around the screen, rebounds from struck objects, and knocks out bricks in the walls of bricks. It also includes a player-controlled "bumper" to keep the ball from going out-of-bounds and being lost, a defined playing field with three walls from which to bounce the ball, and some eight rows of blocks, the amount of points received for hitting them dependent upon their color and distance from your bumper.

The game keeps score by color; 5 points for the green at the bottom, fifteen for the blue above it, and twenty for the yellow-orange blocks just above that. When you clear the entire screen, you are awarded an extra ball, the paddle shortens by one dot and moves closer to the blocks. This continues, screen after screen, until the bumper is as small and as close to the bricks as it can be. In addition, the points received for hitting the blocks are all increased by 3 points. That is, when you are playing the second screen, the green blocks at the bottom of the screen are eight points. If you manage to get to even the next screen, they will be worth eleven, and so on. Unlike the size of the bumper, the values for the bricks have no limit, and may increase in value for as long as you can play the game.

Operating Instructions

1. Key in 'BREAKUP' from the listing and save it on your tape or disk, and then RUN it.
2. First you are asked whether you will play from paddles or the keyboard. Choose the corresponding letter — P, or K.
3. The program will display the playing field, the brick walls, and your bumper. When you are ready to start play, press the button on the paddle, or the START key on the system console.
4. If you have chosen the keyboard use the cursor left arrow and cursor right arrow keys to move the bumper left and right. Holding the shift key at the same time increases the speed of the bumper.
5. If, for some reason, you halt program execution with the Break key, you must hit the SYSTEM/RESET key before re-RUNing. This will be further explained later.

The Program

The ball starts from a random position at the bottom of the screen and travels upwards, hitting a brick. This causes the brick to disappear, adds the appropriate amount of points to your score, and rebounds the ball towards the bottom. Here is the challenge: You must hit the ball back with your bumper to keep the ball from traveling out-of-bounds and off the screen, thereby losing the ball. If you are successful, the ball will simply hit another brick and bounce back. If you miss the ball, a buzzer will sound and the program halts until you hit the paddle or the START

button. You are allowed six balls total, plus an extra one for every screen you clear. Also, the angle and relative speed of the ball increase the closer you hit the ball to the ends of the bumper. Hitting the ball near the center of the bumper helps to restore the ball to a less radical angle.

Breakup's Animation: The Idea of Player-Missile Graphics

The animation in Breakup was done with the Atari's Player-Missile (PM) graphics capabilities. I used PM graphics because the speed of moving figures (players) around on the screen, such as the ball and paddle, is very fast. Also, PM graphics makes it very easy to test for collisions. This makes for a faster and more challenging game. In fact, even machine language versions of this game, which generally don't have to worry about speed due to the speed inherent in machine language programs, use PM graphics because of its ease of use.

A player is a zone on the screen that is eight pixels wide and extends vertically off both the top and bottom of the screen. A missile is generally a very thin player; it is only two pixels wide and likewise, extends past the top and bottom of the screen. There are several locations (registers) that correspond to the characteristics of each of the players and missiles, such as color, pixel width, priority, collision detection, and horizontal position of each. The reason the players and missiles are so relatively thin when compared to their height, stems from the fact that there is no vertical position register for them, only a horizontal position register. This means that in order to move a player vertically (as needed by the ball, for example), we have to physically redraw the player either higher or lower in memory. But before we deal any further with the describing locations of PM graphics, let's first uncover how the Atari handles PM graphics in the first place.

The Atari allows for four separate players on the screen and four missiles, or five players if you combine all four missiles and treat it like a player. There are in general, two types of players, those drawn in one line and those drawn in two line resolution. One line resolution is just that; the players are drawn out one scan line at a time. Two line resolution is simply drawing the players out two scan lines at a time. One line resolution, while it allows for better looking pictures, takes 2K of memory to store, while two line resolution takes 1K of memory to store. Each player in one line resolution takes 256 bytes to describe (one for each scan line from the very top of the screen to the bottom), and each player in two line resolution only takes up 128 bytes as each byte corresponds to two scan lines instead of simply one. Note that not only does the better resolution take up more room, but the memory used for it must start on a 2k boundary (the starting location must be divisible by 2048) while the two line resolution memory only has to start on a 1K boundary (starting location is divisible by 1024). Thus we have to be somewhat careful in our placement of the player-missile memory.

The Atari finds this memory through its base address register, which is location 54279. That is, location 54279 tells the Atari where to go to find out what the Players look like. But since the location is only one byte in size (it is only one location) it has to hold the *page number* of the

PM memory. A single byte, which can hold any number from 0 to 255, will be able to address any one of the 256 pages in the Atari. The paging method is simply a way for the Atari to find its way around with only one byte telling it where to go.

That's the Way the Ball Bounces.

Another time saving feature of PM graphics is its collision detection capability. A collision occurs when any player or missile touches something other than the background. This capability allows the program to, with a single PEEK statement, find out if anything is hitting any one of the players or missiles, or if they are touching anything. This makes the whole checking routine for the ball and paddle collisions very fast.

The way this collision detection works is simple. There is a register for every possible PM collision. The Player to Playfield collisions register is the location that is read constantly to see if the ball (player 0) has hit something, so that the appropriate ball movement routine can be activated. Similarly, the player to player collision register is read to see if the paddle has hit the ball.

Combining a few things...


To make the colored bricks, we used redefined characters in graphics mode 2. We used characters simply because of the color capability, and ease of drawing and erasing. Characters in graphics mode 2 can be displayed as four different colors. So, we re-defined the character "\$" to a 7 dot x 5 dot brick.

The first 384 bytes of memory (in double line mode) are always unused. And the first 512 bytes remains unused because this program did not enable the missiles (everything is done with the players.) This means that we have 512 bytes sitting there on a 1K boundary, doing nothing. This is perfect for a graphics 2 character set. By using this space for the somewhat altered character set, we can store something that would normally require 1½K (1K for the PM storage, and ½K for the character set) in only 1K.

The actual movement of the ball was calculated out in BASIC and executed in machine language. This is because, as mentioned earlier, PM graphics is great and quick for moving figures horizontally, but vertical movement must be done manually. BASIC proved to be much too slow for this. There are other ways around it, but having a machine language routine was the easiest.

Program Description

The routine to move the ball and the paddle, test for collisions, and do anything else involving animation is entirely contained in the lines 100 to 190. Note that this routine is almost at the very top of the program; all initialization and other routines are done below it. This is a programming trick to speed up the game, because the more lines that exist above a routine, the slower that routine will be. This has to do with the fact that when a GOTO is encountered, BASIC starts looking for the destination line number from the top and checks them all one by one until it finds where it has to go. This takes

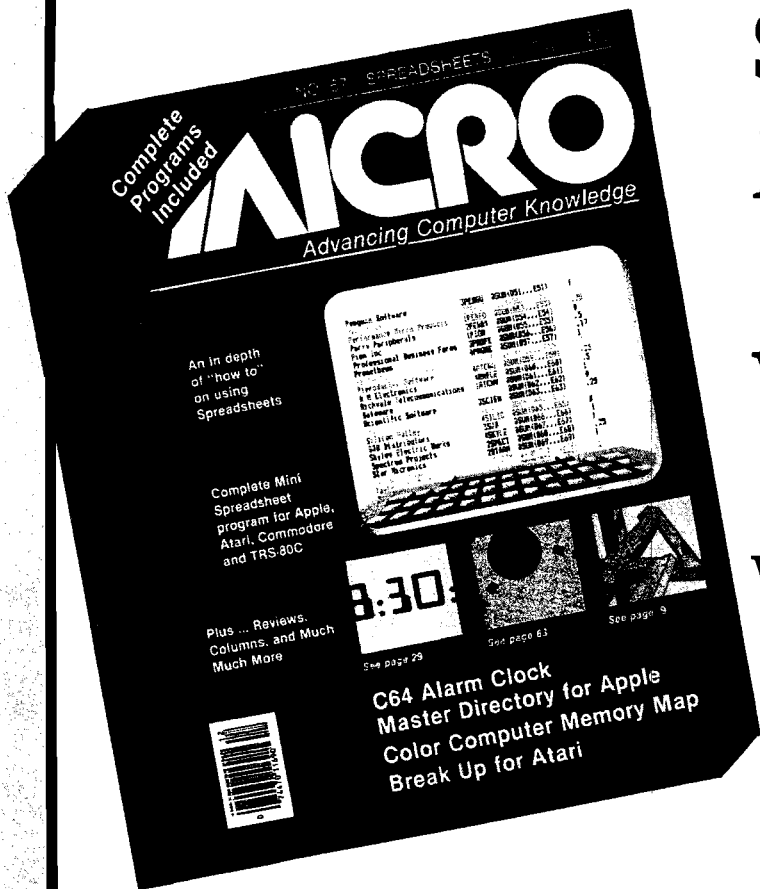

Subscribe to
MICRO...
 Save 20% and
 we'll send you a
BONUS GIFT
 with your subscription!

Fill out the attached
 card and mail today!

CHOOSE FROM:

★ **Best of MICRO Vols. 2 and 3**
 An \$18.00 Value — **FREE!**

OR

★ **MICRO Calc** for Apple, Atari, TRS-80, or C64
 A \$14.95 Value — **FREE!**

OR

★ **What's Where in the Apple**
 A \$24.00 Value for Only \$12.00

**TWO NEW
 FROM**

ALSO

**Don't Miss
 These Great MICRO Publications
 A Feast Of Computing Ideas
 Use These Postage-Paid Cards To Order**

**SAVE
20%!**

**Use This
Postage-Paid
Card To
Subscribe...**

**Or Call
Toll-Free
1-800-345-8112**
(In PA 1-800-862-2444)
(MasterCard and VISA Accepted)

MICRO™

SAVE 20%



- YES!** Enter my subscription to MICRO for just \$24.00! and with it send me the BONUS GIFT I've checked.
- Best of MICRO Volumes 2 and 3.** An \$18.00 Value — **FREE!**
- MICRO Calc** for Apple Atari TRS-80 C64
A \$14.95 Value — **FREE!**
- What's Where in the Apple** at Half Price! A \$24.00 Value — **Only \$12.00!**

Please rush my subscription and the BONUS GIFT I've checked to:

Name _____
Address _____
City _____ State _____ Zip _____

(Allow 6-8 weeks for delivery)

I'm paying by: Check MO
 VISA MC

Total Enclosed: \$ _____

Visa/MC # _____

Exp. Date: _____

MICRO™'s Newest Books

NEW for VIC-20 Users!
Mastering Your VIC-20
With 8 BASIC Projects

A book that makes learning to program your VIC-20 fun! Contains 8 projects and programs. Games, utilities — even a VIC-20 version of "VisiCalc." All 8 programs on cassette to help you learn faster.

Mastering the VIC-20 @ \$19.95

NEW for OSI Users!
MICRO on the OSI

Includes Machine-Language enhancements and BASIC Aids, hardware modifications for enhanced/reversed video, programs for control code and upper/lower case entry. A valuable programming tool.

MICRO on the OSI @ \$19.95

**BOOKS
MICRO!**

Please rush the MICRO Books I've checked above to:

Name _____
Address _____
City _____ State _____ Zip _____

(Allow 6-8 weeks for delivery)

MA residents add 5% sales tax.

I'm paying by: Check MO
 VISA MC

Total Enclosed: \$ _____
(Add \$2.00 s/h per book.)

Visa/MC # _____

Exp. Date: _____

MICRO™'s Best Sellers

The Best of MICRO

Make your computer reference library complete by adding the "Best of MICRO" to your present book collection. Each volume full of articles and programs pulled from the pages of MICRO. Excellent software at a very low price!

- BOM Volume 2 @ \$8.00
- BOM Volume 3 @ \$10.00

**What's Where
in the Apple**

Revised new addition with text added to the original atlas and gazetter. All Apple users will find this book helpful in understanding their machine and essential for mastering it.

- What's Where in the Apple @ \$24.95
- The Guide @ \$9.95

**Best Sellers for
APPLE Users!**
MICRO on the APPLE

Programming aids, utilities, games, enhancements. Together Volumes 1, 2, and 3 contain over 100 programs on diskette. Fully documented and explained.

- 3-Volume Gift-Boxed @ \$59.95
- Vol.1 Vol.2 Vol.3 \$24.95 ea.

Please rush the MICRO Books I've checked above to:

Name _____
Address _____
City _____ State _____ Zip _____

(Allow 6-8 weeks for delivery)

MA residents add 5% sales tax.

I'm paying by: Check MO
 VISA MC

Total Enclosed: \$ _____
(Add \$2.00 s/h per book.)

Visa/MC # _____

Exp. Date: _____




NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 20, AMHERST, NH

POSTAGE WILL BE PAID BY ADDRESSEE

MICRO™

10 Northern Blvd.
P.O. Box 6502
Amherst, NH 03031

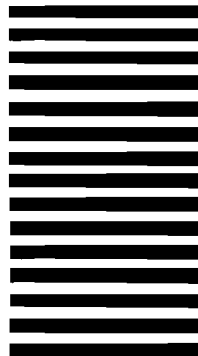


**SAVE
20%!!!!**

**Subscribe
to**

MICRO™

Use This Postage
Paid Card to Order
the Next 12 Issues
of MICRO and SAVE
\$6.00 Off
Newsstand Price!



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 60, CHELMSFORD, MA

POSTAGE WILL BE PAID BY ADDRESSEE

MICRO™

34 Chelmsford Street
P.O. Box 6502
Chelmsford, MA 01824



**A Feast Of
Computing
Ideas...**

**New Book
From**

MICRO™



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 60, CHELMSFORD, MA

POSTAGE WILL BE PAID BY ADDRESSEE

MICRO™

34 Chelmsford Street
P.O. Box 6502
Chelmsford, MA 01824



Order These

**Best
Sellers**

From

MICRO™

time, and if you have a lot of lines above the routine, this will take a lot of time. Therefore all routines that are not time dependent, such as the initialization and score keeping routines, appear below the movement routine. In this way, no time is wasted during the movements.

Line 10 dimensions all the strings and arrays used by the program: M\$ holds block move routine discussed in previous chapters, M2\$ holds the ball movement routine, BALL\$ holds the Player-Missile description for the ball (only twenty bytes worth), A holds the possible angles resulting from a collision with the bumper, P holds the points for each line of bricks on the screen, and PAD holds the descriptive byte that describes how the paddle looks from screen to screen. All of these will be covered a little better in a minute.

Line 20 calls the initialization routine at line 30000.

Line 30010 lowers the top of memory pointer by 1K (four pages) to make room for the player-missiles and new character set. Fortunately, location 106 points to a 4K boundary, so subtracting 1K from this location insures that the location will be on a 1K boundary (it will be divisible by 1024). The graphics 1 screen is initialized right after the pointer is moved, so that the computer can re-adjust the appropriate pointers to the new loss of 1K memory.

In line 30012, START is assigned the address of the new memory area, and the two machine language routines are loaded in.

Line 30014 pokes the starting location with a zero and propogates it through the entire 1K by moving 1023 bytes from the starting location to just the following location.

Line 30020 uses the Block Move routine to move the standard character set from ROM to the new memory allocated just before the PM memory area. This allows us to redefine the few characters we have to and keep the rest of them as they are.

Line 30030 and 30040 make players 2 and 3 into the left and right walls of the game. These walls could have been merely character, as is the top wall above the bricks, but they were made as players so that a single check could be made to determine if the ball should bounce horizontally or not.

Line 30044 puts the description of a 7 dot wide paddle into the player 1 area.

Lines 30050 to 30054 redefine the two characters whose internal value is 4 and 5 ("\$", and "%" respectively), to the brick and solid block. The latter is used in the drawing of the wall on the top of the screen.

Lines 30060 to 30066 define the values of all the constants in the program. The majority of these are the locations for characteristic changes in the player missiles.

Line 30070 opens the keyboard for later input. It will remain open during the entire execution of the program.

Line 30080 sets up all the game values. (See the variable tables for details).

Lines 30082 to 30090 load in the values for the A, P and PAD arrays.

Lines 30100 to 30120 asks the user if he wants to play via paddles or the keyboard. CTRL holds the line number of the appropriate bumper routine.

The routine found at lines 30200 to 30260 initialize the screen. The PM graphics are enabled, the character set is

ROCKWELL Microcomputers from Excert, Inc.

• • SPECIALS • •

A65-1 (1K RAM)	\$435
A65-4 (4K RAM)	\$455
A65-4B,4F (4K, BASIC or FORTH*)	\$495
A65-4AB (4K, BASIC & Assembler)	\$525
A65/40-5000 (32K RAM)	\$1250

LANGUAGES for AIM-65® & AIM 65/40

Assembler	\$35
BASIC ROMs	\$65
FORTH* ROMs	\$65

ENCLOSURES & POWER SUPPLIES

A65-006	\$175
ENC4A	\$115
ENC5A	\$130
ENC6A	\$140

Educational Computer Division EXCERT INCORPORATED

- SALES
- SERVICE
- INSTALLATION
- CONSULTING

P.O. Box 8600
White Bear Lake
Minnesota 55110
(612) 426-4114

RM 65 SERIES

Deduct 5% from list if ordered with AIM 65® or AIM 65/40.

REPAIR SERVICE

(out of warranty only)
\$25/hr. plus parts - \$25 min.

SPARE PARTS

are available



CASH DISCOUNT -Deduct 5% for Prepaid Orders (we pay shipping)

TERMS:

Net 30 from approved Companies & Institutions — otherwise COD.
Shipping will be added to order. Minnesota residents add 6% sales tax.
Prices subject to change without notice.

Authorized Dealers for:

ROCKWELL INTERNATIONAL CORP.,
CUBIT, MTU, FORETHOUGHT PRODUCTS, GORDOS,
SEAWELL, DYNATEM, APPLIED BUSINESS COMPUTER

AIM-65 is a registered trademark of Rockwell International Corp.
*FORTH is a registered trademark of Forth, Inc.

enabled, and the bricks and walls are set up.

Line 50 pauses the game until either the paddle or START button is pressed. This gives the user time before the ball is released.

The entire game is controlled through lines 100 to 190.

In line 100, the horizontal and vertical displacements are added to the X and Y coordinates of the ball. Then the paddle is moved (CTRL is the line number of the appropriate routine). A machine language routine that moves the ball within the player is then called. This is what happens in the routine:

The routine is passed the following values:

- x coordinate,
- y coordinate,
- the starting location of the ball description,
- the start of Player 0 (where to put the ball),
- and, how many bytes of the ball description to move.

Player 0 is moved horizontally (only one location to change)

Player 0 is moved vertically

The collision registers are cleared

The routine then waits for 1/60th of a second, and then returns to BASIC

Clearing the collision registers is performed by the internal workings of the Atari whenever location 53278 is POKEd with any number. 1/60th of a second is waited out to allow the collisions to register.

Line 110 assigns the needed collision registers to the following variables: BPF (for the ball to character collisions), BPL (Ball to wall collisions), and PB (Paddle to ball collisions). Y is then checked to see if the ball has been missed.

Line 150 turns off any sound that may have turned on by some previous collision. BPF is then checked to see if it has hit playfield 0, 1 or 2 (one of the hittable bricks. If a collision has occurred, then control is passed to the brick routine at line 200.

Line 160: If the ball has hit playfield 3, then reflect (negate) the vertical displacement and make a sound.

Line 170: If the ball has hit either wall, then horizontally reflect it and make a sound.

Line 180: If the paddle has hit the ball then vertically reflect it. H is then assigned the appropriate angle of horizontal reflection. A sound is made.

Line 190 returns control back to line 100 in the event that none of the above has occurred.

Lines 200 to 210 handle the brick colliding routine:

Line 200 prints a space over the brick, effectively erasing it, adds the appropriate amount of points to the score, vertically reflects the ball, makes a sound, and subtracts one from the number of bricks variables (NB).

Line 202 prints the score. If NB is zero, then control is passed to the new screen routine.

Line 210 passes control back to the main loop.

The value of CTRL is set in the routine at 30100, and is either a 300 or a 400. CTRL is the line number of the appropriate bumper routine. If the game is controlled by the paddles then CTRL is 300, and if it is controlled by the keyboard, then CTRL is 400. Line 300 assigns the variable PP with the paddle position negated and moved to the right a little. The Paddle value was negated so that paddle movement would correspond to the bumper movement on

the screen. Lines 400 to 420 move the paddle left or right one pixel depending upon whether the left or right arrow key was held down. If the shift key was held down then the paddle is moved in the direction specified by five pixels instead. This allows the paddle to speed up if it has too.

Lines 500 to 550 contain the missed ball routine. If the number of balls left is greater than zero then, the game values are re-initialized, the number of balls left is decremented by one, and the game resumes at line 50. If the number of balls is zero, then the game is over, and you are asked if you wish to try again. If you specify "N", then the top of memory pointer is reset to its original spot, and the program halts. If "Y" was specified, the top of memory pointer is reset, and the program is re-RUN. Note that if the program is stopped via the Break key, and rerun, the top of memory will be even lower than it was before. If this is continued, the computer will eventually run out of room and unrecoverably crash. It is for this reason, that whenever the program stops via the Break key, the user should hit SYSTEM/RESET.

Lines 600 to 690 handle the screen clear routine. If it can be done, the paddle is shorted by one pixel and moved up three lines. This is done at line 610 by block moving the description bytes for the paddle up one byte three times. Between each move upward, a sound is briefly made and a delay occurs, so that the changing of the paddle is more obvious. SZ is a flag telling the program that there is still room to move the paddle upward three lines and that the paddle can still be shortened. It is incremented every time the paddle is raised. If SZ ever reaches 7, then the paddle is no longer raised or shortened every time the screen is cleared. The points received for each brick struck is also increased by 3 for each consecutive screen. When this routine is done, the game values are re-initialized and the game resumes at line 50.

The DATA statements on lines 32010 and 32110 hold the two machine language routines in string form. These are read in to the appropriate strings during the initialization routine.

The rest of the DATA statements on lines 32210 and 32220, 32310, 32410, and 32510 hold the values for the new characters in the character set, the paddle angles, the points received for the blocks per line, and the paddle sizes per new screen, respectively. They are likewise read into their appropriate variables during the initialization routine.

MICRO

You may contact the authors at MICRO Magazine,
Box 6502, Amherst, New Hampshire 03031.

Listing 1


```

10 DIM M$(54),M2$(99),BALL$(20),A(7),P(23),PAD(6)
20 GOSUB 30000
50 IF PTRIG(0) AND PEEK(53279)<>6 THEN 50
100 X=X+H:Y=Y+V:GOSUB CTRL:POKE P1,PP:
    U=USR(BALLX,Y,X,Y,BALL,STP0,14)
110 BPF=PEEK(POPF):BPL=PEEK(POPL):PB=PEEK(P1PL):
    IF Y>111 THEN 500
    
```


(Continued on next page)

another
FLEXIDUCT®

OFFICE
SAFETY PRODUCT

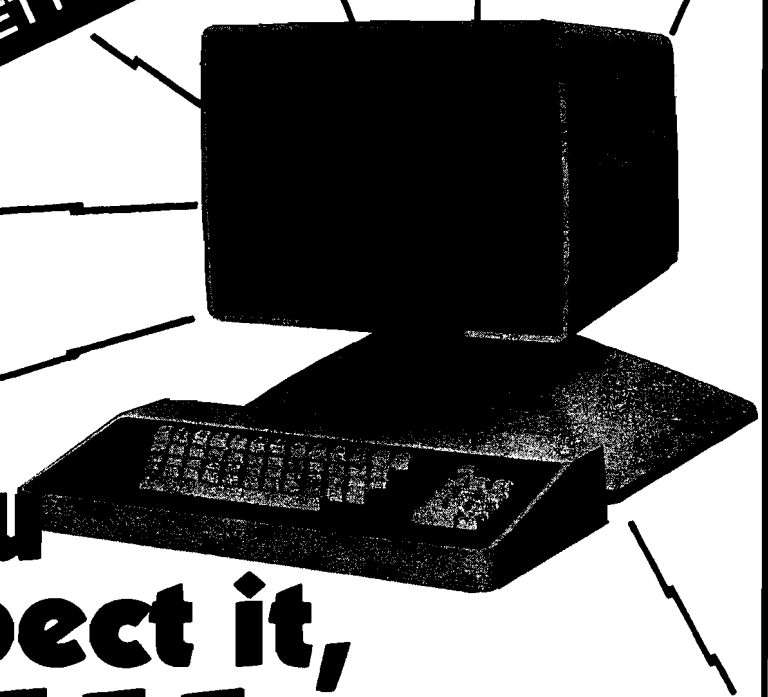

When you least expect it, **ZAP!!!**

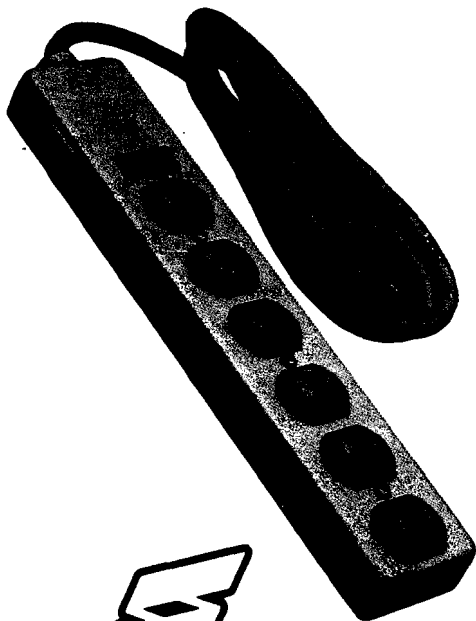

In a few millionths of a second, common electrical surges and spikes can enter your data processing equipment and cause memory loss, false logic and misregistration. Surges very often do permanent damage to microcircuitry.

FLEXIDUCT Surge Suppressors catch surges and spikes before they have a chance to enter your equipment. In billionths of a second (Nanoseconds), **FLEXIDUCT** Surge Suppressors dissipate surges and spikes from any side of the line (most protect only one side).

The multi-outlet unit is ideally suited to the computerized workstation. It gives you the advantage of circuit breaker protection with plenty of outlets for data processor and peripheral equipment.

No computer should be without the protection of a **FLEXIDUCT** Surge Suppressor...**especially yours!** Write or call for further information. Available from office products retailers.

FLEXIDUCT® Surge Suppressors

a product of Winders & Geist, Inc. P.O. Box 83088 Lincoln, NE 68501 402/474-3400

MICRO™

From Here To Atari

by Paul S. Swanson

The listings accompanying this column provide my Christmas greetings to you. The assembly code is for reference. The BASIC program contains the resulting machine language in the data statements. It is an example of using display list interrupts. Enter the BASIC listing to see a color display.

Several display list interrupts control the changing colors in the triangular "tree" in the display and two more are used to color the trunk and to change the text window background to black. Every line of the mode 5 triangle has an interrupt on it. The colors are rotated under the control of the BASIC program.

The BASIC program begins by drawing the tree using dots of random colors. The background color is the only one not used in that section. Later, the display list interrupt will constantly alter the contents of the referenced color registers. The trunk is drawn with the color from register 2, which is declared in BASIC with COLOR 3. This is the same color register used for the text background.

Establishing the points for the interrupts is done in lines 120 through 160. First, DL is set equal to the location of the display list. Next, all of the bytes controlling lines 1 through 31 are altered. The 138 used is the code for GRAPHICS 5, which is 10, plus 128, which sets the display list interrupt enable bit. The tree occupies screen lines 1 through 30 and screen line 31 is the first line on the trunk. The line before the text window gets the last interrupt, which will be used to set the text background to black.

The display list interrupt is read into page six in lines 170 through 190. The vector is set up to point to the routine in line 200 and the first statement in line 210 enables the interrupt. Q is used to control the color base for the interrupt routine and A controls whether the message is "MERRY CHRISTMAS" or "HAPPY NEW YEAR."

The BASIC loop that occupies lines 220 through 280 alters the color base and prints the messages. The interrupt is going constantly, so the BASIC program does not need to call anything. All that it changes is the contents of location 1664, which is used by the interrupt as the color base. The two phrases, controlled by A, are printed using the loop at lines 230 through 260. The FOR/NEXT loop within that loop controls the timing for printing the individual letters. Lines 270 and 280 dorm a delay at the end of each phrase, then set up A to point to the other phrase.

The assembler routine starts by saving the three registers on the stack. Since it is interrupting the program and it will use these three registers, they must be saved. Otherwise, the program that is interrupted will have the wrong values in the registers when the interrupt returns.

VCOUNT contains the number of the current screen scan line divided by two. This will serve to divide the in-

terrupt into three parts. The triangle shape requires a color rotation, the trunk requires that register 2 be set to brown and the text window requires that register 2 be set to black. VCOUNT is 79 at the interrupt where the trunk color is to be selected, so it is compared to 79. If it is found to be 79, a branch is made to STUMP, where brown is stored in register 2. If it is found to be greater than 79, a branch is made to WINDOW, where register 2 is set to black.

If it is neither equal to nor greater than 79, the color rotation is performed. Since the interrupt happens during the last scan line of the previous mode line, a STA WSYNC, which stops the processor until the end of the current scan line, must be performed before the registers are changed. Preparation for this involves placing the proper colors into the 6502 registers.

The colors are based on whatever is in location 1664, which is controlled by the BASIC program. This is added to VCOUNT and placed in register Y. For register X, \$15 is added to the color and \$2A is added for register A.

The STA WSYNC is performed next, immediately followed by the three statements that place the colors in the registers. Although the timing is not critical in this program, because the colors affected are not near the left edge of the screen, the placing of the colors takes place totally within the horizontal blank period. The three store commands require 12 machine cycles and there are 26 in the horizontal blank period, although a few of these are stolen by DMA.

Since the color changes are not critical for the trunk and the text window, WSYNC is ignored and the colors are stored directly into the color registers. The \$26 is equivalent to SETCOLOR 2,2,6, which is the brown used for the tree trunk. In WINDOW, the background is set to black and the text (register one) is set to a medium white.

The EXIT routine must restore the three registers in the reverse of the order in which they were stored on the stack. After restoring the three registers, the interrupt mask (processor I bit) is cleared and the return from the interrupt is performed. The processor I bit is set when the interrupt is called and leaving it set prevents other interrupts from altering the timing in this interrupt.

POKEY Timers

Another interesting set of interrupts are controlled by POKEY, which is the device responsible for the sounds and operation of the serial I/O bus. There are three POKEY timer interrupts available for general program use, referred to as POKEY timers 1, 2 and 4. These use the values in the AUDF registers, which are the same ones used for generation of sounds.

The advantage to the POKEY timers over the display list or vertical blank interrupts is that they are controlled through independent counters. Display list and vertical blank interrupts depend on the 60 Hz television frame rate and cycle at that frequency. The POKEY interrupts are completely controlled by frequencies which can be set by software.

To get an exact frequency with a POKEY timer is not that easy unless the frequency you want is an even multiple of the clock rates. There are three clock rates available, just as there are for the sound channels. In fact, they are

the same sources. The "normal" frequency, which is the one selected when the system is booted, is 63.9210 KHz. This may be changed to count at 1.78979 MHz or 15.6999 KHz. When the interrupt routine is enabled properly, an interrupt happens each time the counter reaches zero. The frequency set for the clock rate can be used to calculate the frequency of the interrupt. The interrupt frequency is equal to:

the clock frequency / (2 * [1 + number in the AUDF register])

POKE the value N into the register and the frequency of the interrupt is the frequency set (the 64 KHz or 15.7 KHz) / (2 * [N]). For 1.79 MHz, there is a slight modification of the formula. Divide the 1.79 MHz by two times the sum of N plus 4. If you are clocking two channels together, use 7 instead of the four. If you don't know what that means, use 4.

When you use the timer interrupts, pay close attention to what is on the system stack. Before jumping through the timer interrupt vector, the operating system pushes the A register onto the stack. Before your routine starts, you should push the X and/or Y registers onto the stack if you intend to use them. Before you return from the interrupt, pull X and/or Y registers off the stack, then PLA and clear the interrupt with CLI. If all that was pushed onto the stack is not pulled off, or if more is pulled off than was put on, the system will crash or at least lock up as soon as you enable the interrupt.

The method for implementing the POKEY timers is stated inaccurately in the manuals. If you set it up the way the manual states, your system will lock up and you will have to press SYSTEM RESET to continue. Instead, first set up AUDCTL (\$D208, or 53768) with zero for 64 KHz, one for 15 KHz or 96 for 1.79 MHz. Next, set the volume [AUDC1, 2 or 4 at \$D201, \$D202 or \$D204 53761, 53762 or 53764]. Now you can set up your software interrupt routine and change the interrupt vector to point to it. The three vectors are at \$0210, \$0212 and \$0214 (528, 530 and 532). The above steps can be in any order. After all of them are completed, start the timer by POKE 53769,0 (actually, any number from 0 to 255 can be POKEd here and you will get the same effect). After all that is done (not before the POKE 53769, which is what the manual states), enable the timer interrupt.

Enabling the interrupt involves PEEK(16). Add 1, 2 or 4 to that value, which corresponds to the interrupt you are using, and POKE the number back into location 16 and also into location 53774. Once you do that, your interrupt will begin and an interrupt will be generated when the timer you set counts down to zero. As soon as the interrupt happens, the timer is automatically loaded with the value you originally POKEd there, so the process repeats until you disable it.

Problems to Watch For

Problems associated with POKEY timer interrupts involve timing and other interrupts. DMA can alter, unpredictably, the amount of time between the interrupt and the first action taken by your interrupt routine, making the timing a little less precise. The average over several interrupts will be at your selected frequency, but the timing

between two consecutive actions may be off by a few clock cycles if DMA is not disabled.

Other interrupts can also introduce problems. The major problem is the vertical blank interrupt. The only solution to this is to turn off the interrupt, and the display list interrupts if any are enabled, by POKEing a zero to location 559. Make sure you do all your SETCOLOR, GRAPHICS and other statements that depend on shadowing first or resort to using the hardware registers. That POKE also turns off the real time clock and keyboard auto-repeat.

Another interrupt source is the IRQ interrupts. These can be masked out by setting the corresponding bits in locations 16 and 53774 to zero, storing only the 1, 2 or 4 for the POKEY interrupt in those locations. Another possibility is to SEI at the beginning of the interrupt (don't forget CLI at the end).

If you do not disable the keyboard, you may get some additional delays on some of the interrupts. The keyboard click uses the STA WSYNC command, which stops all processing, including interrupt servicing, until the end of the current television scan line is complete. Also, any other interrupt that leaves the processor "I" bit set will cause the processor to ignore the interrupt. Peripheral access may do this.

If you set up the POKEY timers to do something for you, you may have few, if any, problems with them. The problems mentioned above can be used as places to check if the timing is found to be inaccurate. If you set everything up the way I have described and the system locks up when you enable the interrupt, your machine language may have a fatal error. If you find no error, turn the computer off then on to reboot and try it again.

One undocumented note on the POKEY timers is that you can change the frequency between interrupts. If the calculations for the desired frequency are not exactly what you want, maintain a counter somewhere in memory. At the beginning of the routine, use STA to put the value into AUDF that BASIC placed there. Increment the counter and test it to see if it counted to where you want to make an adjustment. If it is there, store the adjustment frequency into AUDF and reset the counter to zero. The next interrupt will obey the new frequency, then put the old frequency back into AUDF. Remember that this is not documented, so it may not work on all Atari computers. Test it out before you depend on it.

Enabling the POKEY timer interrupts involves a lot of calculation. However, if they are properly enabled, very precise timing can be done with them. I am preparing a project using those timers and I will be writing an article describing it completely.

Next Month

I recently acquired an ATR8000, which is a device containing a Z80 processor, memory, a printer port, an RS-232-C port and disk controller logic so that you can hook up "bare" disk drives to your Atari. The ATR8000 offers CP/M compatibility and, when the CP/M option is not in use, the ATR8000 will act as a printer buffer. A functional description of the ATR 8000, along with pricing, will be featured in next month's From Here to Atari.

You may contact Paul at 97 Jackson St.,
Cambridge, MA 02140.

ACRO

```

Listing 1
00005 * Listing 1
00010 *
00020 * DLI ROUTINE
00030 *
00040 * EQUATES
00050 *
D40B: 00060 VCOUNT .EQ $D40B * SCAN LINE COUNTER
D016: 00070 COLOR0 .EQ $D016 * FDR SE.0,
D017: 00080 COLOR1 .EQ $D017 * FDR SE.1,
D018: 00090 COLOR2 .EQ $D018 * FDR SE.2,
D40A: 00100 WSYNC .EQ $D40A * WAITS FOR HBLANK
00110 *
00120 * INTERRUPT ROUTINE
00130 *
00140 .OR $600 * FOR PAGE 6
0600: 48 00150 DLROUT PHA * SAVE REGISTERS *
0601: 98 00160 TYA
0602: 48 00170 PHA
0603: 8A 00180 TXA
0604: 48 00190 PHA
0605: AD 0B D4 00200 LDA VCOUNT * CHECK
0608: C9 4F 00210 CMP #79 * SCAN
060A: F0 1B 00220 BEQ STUMP * LINE
060C: 10 21 00230 BPL WINDOW
060E: 18 00240 CLC
060F: 6D 80 06 00250 ADC 1664 * ADD COLORBASE
0612: A8 00260 TAY
0613: 69 15 00270 ADC ##15
0615: AA 00280 TAX
0616: 69 2A 00290 ADC ##2A
0618: 8D 0A D4 00300 STA WSYNC * WAIT FOR BLANK
061B: 8D 18 D0 00310 STA COLOR2 * STORE COLORS
061E: 8C 16 D0 00320 STY COLOR0
0621: 8E 17 D0 00330 STX COLOR1
0624: 4C 39 06 00340 JMP EXIT
0627: A9 26 00350 STUMP LDA ##26 * BROWN TRUNK
0629: 8D 18 D0 00360 STA COLOR2
062C: 4C 39 06 00370 JMP EXIT
062F: A9 00 00380 WINDOW LDA #0 * BLACK BACKGROUND
0631: 8D 18 D0 00390 STA COLOR2
0634: A9 0A 00400 LDA #10 * WHITE LETTERS
0636: BD 17 D0 00410 STA COLOR1
0639: 68 00420 EXIT PLA * RESTORE REGISTERS
063A: AA 00430 TAX
063B: 68 00440 PLA
063C: A8 00450 TAY
063D: 68 00460 PLA
063E: 58 00470 CLI * CLEAR INTERRUPT
063F: 40 00480 RTI * AND RETURN

```

Listing 2

```

5 REM *** Listing 2 - Christmas Greetings
6 REM *** Program by Paul S. Swanson
7 REM ***
10 GRAPHICS 5
20 FOR I=0 TO 30:REM * DRAW TREE *
30 FOR J=40-1/2 TO 40+1/2
40 COLOR INT(RND(0)*3+1)
50 PLOT J,I+1
60 NEXT J:NEXT I
70 COLOR 3
80 FOR I=36 TO 44:REM * DRAW TRUNK *
90 PLOT I,32
100 DRAWTO I,38
110 NEXT I
120 DL=PEEK(560)+PEEK(561)*256:
REM * LOCATE DISPLAY LIST *
130 FOR I=DL+6 TO DL+36:REM * SET INTERRUPTS *

```

```

140 POKE I,138
150 NEXT I
160 POKE DL+44,138
170 LOC=1536:RESTORE :REM * READ DLI ROUTINE *
180 READ N
190 IF N(>256 THEN POKE LOC,N:LDC=LDC+1:GOTO 180
200 POKE 512,0:POKE 513,6:REM * ENABLE DLI *
210 POKE 54286,192:Q=255:A=0
220 RESTORE A+2000:? CHR$(125):
REM * PRINT MESSAGE *
230 READ N:IF N=256 THEN 270
240 ? CHR$(N);" ";POKE 1664,Q:Q=Q-1:
IF Q<0 THEN Q=255:REM * Q CONTROLS COLORS *
250 FOR I=1 TO 50:NEXT I:
REM * DELAY BETWEEN LETTERS *
260 GOTO 230
270 FOR I=1 TO 300:NEXT I:
REM * DELAY BETWEEN MESSAGES *
280 A=1000-A:GOTO 220
999 REM * DLI ROUTINE IN DECIMAL *
1000 DATA 120,72,152,72,138,72,173,11,212,201,79,
240,26,16,32,109,128,6,168,105
1010 DATA 21,170,105,42,141,10,212,141,24,208,140,
22,208,142,23,208,76,57,6,169
1020 DATA 38,141,24,208,76,57,6,169,0,141,24,208,
169,10,141,23,208,104,170,104,168,104,88,64,
256
1999 REM * MESSAGE #1 *
2000 DATA 32,77,69,82,82,89,32,67,72,82,73,83,84,77,
65,83,256
2999 REM * MESSAGE #2 *
3000 DATA 32,72,65,80,80,89,32,78,69,87,32,89,69,65,
82,256

```

MICRO


Computer Software Associates, an established software house, supplies software for COMMODORE, APPLE, and IBM home computers. CSA is currently looking to expand its product base of serious programs in the areas of home, education, and office.

Computer Software Associates offers over 30 years of market experience, worldwide distribution, innovative packaging, generous royalties, and programmer support.

Interested programmers should contact Mike Mahan, Product Development Department, Computer Software Associates, 50 Teed Drive, Randolph, Massachusetts 02368. Tel. (617) 961-5700.



**COMPUTER
SOFTWARE
ASSOCIATES**

MICROTM**Atari Reviews**

Product Name: **Square Pairs**
Equip. req'd: Atari Computer, BASIC, Cassette Player
Price: ?
Manufacturer: Scholastic Inc.
 906 Sylvan Ave.
 P.O. Box 2010
 Englewood, NJ 07632

Description: A game of matching. Square Pairs allows up to four players to take turns uncovering two boxes at a time and finding two that match.

Pluses: Even though there are three games included, the most interesting part of the program is the ability to make up your own games. After making up a game it can be saved on tape. This allows for more game variety.

Minuses: The program is only available on tape and will only interact with a Atari cassette recorder.

Documentation: The sixteen page manual is clearly written. Most of it is applied towards making up and saving games.

Skill level required: Designed for seven through twelve years of age. May not have much attraction to those over ten.

Reviewer: Richard E. DeVore

Product Name: **Turtle Tracks**
Equip. req'd: Atari Computer w/32K, BASIC, Disk Drive, Atari Printer optional
Price: ?
Manufacturer: Scholastic Inc.
 906 Sylvan Ave.
 P.O. Box 2010
 Englewood Cliffs, NJ 07632

Description: *Turtle Tracks* is an interesting method for children to learn the fundamentals of programming. By typing in simple programs, they are shown, by a "turtle" drawing on the screen, exactly what their program does.

Pluses: The self-booting program is well error-trapped, allowing mistakes to be made without crashing. It allows loops and variables, demonstrating on the screen what they do. There is also a small segment on sound with enough information to let you compose simple music. If there is an Atari printer connected to the system, a print out of the screen may be made by just pressing the OPTION key.

Minuses: The program is slow in accepting keyboard input. The longer a program gets, the slower the cursor responds. Program execution is also slow.

Documentation: The eighty page manual is quite well done. It carries you from loading the program through saving and reloading your work. One of the clearest for children I have seen.

Skill level required: Beginner, recommended minimum starting age is nine years old.

Reviewer: Richard E. Devore

Product Name: **MMG Data Manager**
Equip. req'd: Atari Computer w/48K, BASIC, Disk Drive; printer optional
Price: \$49.95
Manufacturer: MMG MICRO SOFTWARE
 Manalapan 1000 Office Building
 1000 Route 9
 Englishtown, NJ 07726

Description: *MMG Data Manager* is a file management program for any Atari computer with sufficient memory and a disk drive. You may set up your records and fields to suit your particular needs. Although a BASIC program, it has machine language routines and is quite fast in use.

Pluses: The 26 page manual that comes with the program is quite clear and takes you step by step through the use of its features. The program is menu driven and simple enough to use that the manual may not be necessary after the first or second time a record is set up. The sort routine is extremely fast and may be used on up to three levels. The program is well error trapped, making use by the beginning computerist easy.

Minuses: There can be a maximum of only ten fields. The fields do not support computations. A record, once set up cannot be reconfigured. These minuses are features usually found in much more expensive programs and are not often available in this price range.

Documentation: The manual is easy to use and understand. It is a tutorial showing how each program function is used.

Skill level required: Beginning level user.

Reviewer: Richard E. DeVore

Product Name: **WORDRACE & WORDRACE Accessory Disk**
Equip. req'd: Atari 400/800 w/32K & BASIC Cartridge
Price: ?
Manufacturer: Don't Ask Computer Software
 2265 Westwood Blvd., Suite B-150
 Los Angeles, CA 90064

Description: As the name suggests, this is a word game that tests vocabulary skills. Game players, from one to four, must find the correct definition of a word from six possible choices. The clock is ticking so find the correct answer as quickly as possible. Choose your strategy: guess quickly or take more time to study the definitions. Loose points for incorrect answers or too much hesitation. There are three levels of play for everyone from pre-teens to pundits. The number of words in each round of play is selectable, also. For those more interested in sports or famous historical persons, an extra-cost accessory diskette is available. After booting the system diskette, insert the alternate data diskette and the new game data will load.

Pluses: Challenging and educational. This game would also be a valuable (and fun!) way for a student to prepare for college entrance exams.

Minuses: The graphics are simply boring, but word game lovers will overlook this aspect of the software's design.

Skill level required: Age 9 to adult.

Reviewer: Tim Kilby

Product Name: Preparing For the SAT
Equip. req'd: Atari Computer, Atari 410 Recorder
Price: \$99.95
Manufacturer: Program Design, Inc.
 11 Idar Court
 Greenwich, CT 06830

Description: *Preparing For the SAT* is a cassette based series of lessons designed to help prepare for aptitude testing, especially the Scholastic Aptitude Test. The lessons cover analogies, vocabulary, quantitative comparisons, and number relationships. There is one cassette devoted to the taking of aptitude tests with the back side containing a time program for practice. There are a total of six cassettes included with the manuals.

Pluses: Two of the programs have a voice narration included on the cassette for reinforcement. This is a feature used by PDI that I feel greatly enhances the learning process. The information included in the manuals is valid and the programs are well done. After a demonstration, the adults attending spent over an hour working with the various lessons. They not only felt they were learning but found it enjoyable at the same time.


Minuses: Other than the fact that printed tests cannot be made from the programs, I found nothing to complain about.

Documentation: The programs come with two manuals. One is titled "Making The Grade, How To Take and Pass A TEST." This 34 page manual was written by the president of PDI, John Victor. He explains what the tests are, the best methods to use when taking them and shows examples of the types of questions used in the testing. The other 44 page manual explains how to use the programs and has a large section devoted to explaining the problems on the cassettes. They are well done.

Skill level required: High school student or anyone with an inquiring mind.

Reviewer: Richard E. DeVore

MICRO

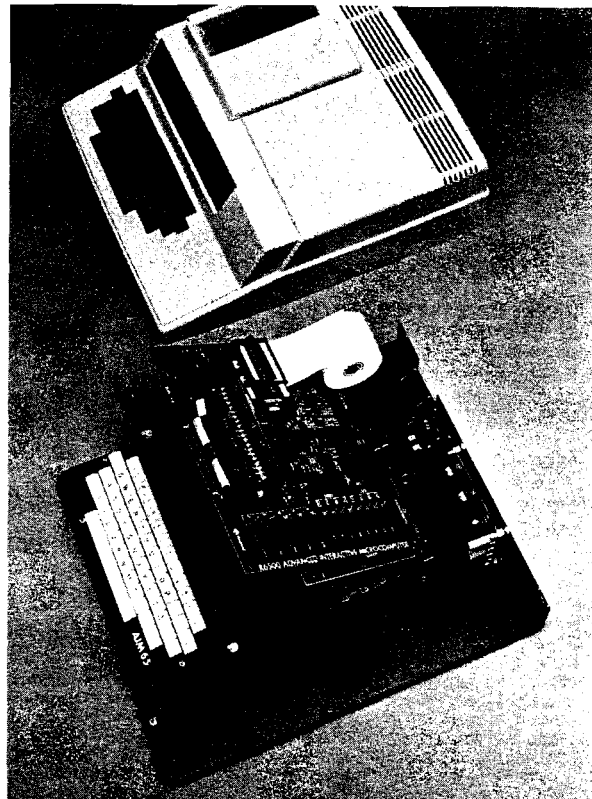

AIM HIGH

Let Unique Data Systems help you raise your sights on AIM 65 applications with our versatile family of AIM support products.

- Go for high quality with our ACE-100 Enclosure. It accommodates the AIM 65 perfectly, without modification, and features easy access two board add-on space, plus a 3" x 5" x 17" and a 4" x 5" x 15.5" area for power supplies and other components. \$186.00.
- Get high capability with Unique Data System's add-on boards. The UDS-100 Series Memory-I/O boards add up to 16K bytes of RAM memory or up to 48K bytes ROM/PROM/EPROM to your Rockwell AIM 65. You also get 20 independently programmable parallel I/O lines with an additional user-dedicated 6522 VIA, two independent RS-232 channels with 16 switch-selectable baud rates (50 to 19.2K baud), and a large on-board prototyping area. Prices start at \$259.00.
- If you need to protect against RAM data loss, the UDS-100B offers an on-board battery and charger/switchover circuit. \$296.00.
- Heighten your AIM 65's communications range by adding the UDS-200 Modem board. It features full compatibility with Bell System 103 type modems and can be plugged directly into a home telephone jack via a permissive mode DAA. No need for a data jack or acoustic coupler. The UDS-200 also has software-selectable Autoanswer and Autodial capability with dial tone detector. The modem interfaces via the AIM 65 expansion bus, with the on-board UART and baud rate generator eliminating the need for an RS-232 channel. \$278.00.
- The UDS-300 Wire Wrap board accepts all .300/.600/.900 IC sockets from 8 to 64 pins. Its features include an intermeshed power distribution system and dual 44-pin card edge connectors for bus and I/O signal connections. \$45.00.
- Get high performance with the ACE-100-07 compact 4" x 5" x 1.7" switching power supply, delivering +5V @ 6A, +12V @ 1A, and +24V for the AIM printer. \$118.00.

Installation kits and other related accessories are also available to implement your AIM expansion plans. Custom hardware design, programming, and assembled systems are also available. High quality, high capability, high performance, with high reliability... all from Unique Data Systems. Call or write for additional information.

Unique Data Systems Inc.
 1600 Miraloma Avenue, Placentia, CA 92670
(714) 630-1430

Products for Commodore, Atari, Apple, and others!

NEW


THE MONKEY WRENCH II A PROGRAMMERS AID FOR ATARI 800 NEW AND IMPROVED — 18 COMMANDS PLUGS INTO RIGHT CARTRIDGE SLOT

If you are a person who likes to monkey around with the ATARI 800, then THE MONKEY WRENCH II is for you! Make your programming tasks easier, less time-consuming and more fun. Why spend extra hours working on a BASIC program when the MONKEY WRENCH can do it for you in seconds. It can also make backup copies of boot type cassette programs. Plugs into the right slot and works with ATARI BASIC cartridge.

The MONKEY WRENCH provides 18 direct mode commands. They are: AUTO LINE NUMBERING — Provides new line numbers when entering BASIC program lines. RENUMBER — Renumbers BASIC's line numbers including internal references. DELETE LINE NUMBERS — Removes a range BASIC line numbers.

VARIABLES — Display all BASIC variables and their current value. Scrolling — Use the START & SELECT keys to display BASIC lines automatically. Scroll up or down BASIC program. FIND STRING — Find every occurrence of a string. XCHANGE STRING — Find every occurrence of a string and replace it with another string. MOVE LINES — Move lines from one part of program to another part of program. COPY LINES — Copy lines from one part of program to another part of program. FORMATTED LIST — Print BASIC program in special line format and automatic page numbering. DISK DIRECTORY — Display Disk Directory. CHANGE MARGINS — Provides the capability to easily change the screen margins. MEMORY TEST — Provides the capability to test RAM memory. CURSOR EXCHANGE — Allows usage of the cursor keys without holding down the CTRL key. UPPER CASE LOCK — Keeps the computer in the upper case character set. HEX CONVERSION — Converts a hexadecimal number to a decimal number. DECIMAL CONVERSION — Converts a decimal number to a hexadecimal number. MONITOR — Enter the machine language monitor.

In addition to the BASIC commands, the Monkey Wrench also contains a machine language monitor with 16 commands used to interact with the powerful features of the 6502 microprocessor.



\$59.95

NEW

VIC RABBIT CARTRIDGE AND CBM 64 RABBIT CARTRIDGE

"High-Speed
Cassette
Load and Save!"



\$39.95
(includes Cartridge
and Manual)

Expansion Connector
on the VIC Cartridge

"Don't waste your Life away waiting to LOAD and SAVE programs on Cassete Deck."

Load or Save 8K in approximately 30 seconds! Try it — your Un-Rabbitized VIC takes almost 3 minutes. It's not only Fast but VERY RELIABLE.

Almost as fast as VIC Disk Drive! Don't be foolish — Why buy the disk when you can get the VIC Rabbit for much, much less!

Easy to install — it just plugs in.
Expansion Connector on rear.
Works with or without Expansion Memory.
Works with VIC Cassete Deck.
12 Commands provide other neat features.
Also Available for 2001, 4001, and 8032

TELSTAR 64

Sophisticated Terminal Communications Cartridge for the 64.

PFO 100 000 CP=D1-D2 BELL 12:30:00 10:14:36
(TELSTAR's Status Line)

Don't settle for less than the best!

- Upload/Download to/from disk or tape.
- Automatic File Translation.
- Communicates in Industry Standard ASCII.
- Real-Time Clock plus Alarm Clock.
- Line editing capability allows correcting and resending long command lines.
- 9 Quick Read functions.
- Menu-driven.
- Similar to our famous STCP Terminal package.
- Works with Commodore Modems and supports auto-dialing.

The best feature is the price — only \$49.95 (Cartridge and Manual)

Machine Language Monitor Cartridge

for the CBM 64


More than 20 commands allow you to access the CBM 64's Microprocessors Registers and Memory Contents. Commands include assemble, disassemble, registers, memory, transfer, compare, plus many more.

Someday every CBM 64 owner will need a monitor such as this.

Cartridge and Manual — \$24.95

More than just an Assembler/Editor!
Now for the "64"

It's a
Professionally
Designed
Software
Development
System



MAE

for
PET
APPLE
ATARI
~~\$169.95~~
Only
\$59.95

NOW, The Best for Less!

- Designed to improve Programmer Productivity
- Similar syntax and commands — No need to relearn peculiar syntaxes and commands when you go from PET to APPLE to ATARI
- Coresident Assembler/Editor — No need to load the Editor then the Assembler then the Editor, etc
- Also includes Word Processor, Relocating Loader and much more
- Join the ATUG User Group for MAE formatted disks
- STILL NOT CONVINCED? Send for free spec sheet!

ATARI, PET, AND CBM 64 EPROM PROGRAMMER

Programs 2716 and 2532 EPROMs. Includes hardware and software. PET = \$75.00 — ATARI and CBM 64 (both include sophisticated machine language monitor) = \$119.95



CBM 64 Debugger

A more sophisticated Machine Language Monitor/Debugger. 20K of object code makes this a powerful tool. Works as a symbolic debugger for the MAE assembler. Diskette and Manual — \$49.95



TRAP 65

TRAP 65 is a hardware device that plugs into your 6502's socket. Prevents execution of unimplemented opcodes and provides capability to extend the machines' instruction set. For PET/APPLE/SYM. Reduced from \$149.95 to \$69.95

5 1/4 INCH SOFT SECTORED DISKETTES

Highest quality. We use them on our PETs, APPLES, ATARIs, and other computers. \$22.50/10 or \$44.50/20



Prowriter Printer - Excellent dot matrix print Parallel = \$489 00
Serial = \$600 00 IEEE = \$589 00

DC Hayes Smart Modem = \$235 00
DC Hayes Micro Modem II = \$289 00

Rana Disk Drive - 375
4 Drive Controller - 114

EPROMS 2716 = \$4.50 2532 = \$7.50
Over 40 Commodore Programs by Baker (on 4040) = \$25.00

Eastern House

3239 Linda Dr.
Winston-Salem, N.C. 27106
(919) 924-2889 (919) 748-8446
Send for free catalog!



Raise your Apple's IQ Twelve Times A Year!



A One Year Subscription Brings You 12 Issues With:

Over \$500 of Programs for your Home, Business, Education and Entertainment. Complete Program Listings with Instructions.

Comprehensive Articles that show what each program does, how to use it and how to type it into your Apple, Franklin ACE or other Applesoft-compatible computer.

Regular Features for the Beginner and Expert.

On The Scene

The Latest New Software/Hardware Releases.

Products! Inside and Out

Comprehensive Product Reviews.

Education Corner

Programs that help make Learning Fun.

Tips 'N Techniques

Little known programming Tricks you can Use.

Disassembly Lines

An Expert reveals the mysteries of Applesoft.

Utilities

Superchargers for Basic, DOS, Printing, and More.

Games

Arcade Fun you can Type and Run.

Note

- Domestic U.S. First Class subscription rate is \$51.95
 - Canada Air Mail subscription rate is \$59.95
 - Outside the U.S. and Canada Air Mail subscription rate is \$89.95
- All payments must be in U.S. funds drawn on a U.S. bank.

©1983 by MicroSPARC Inc. All Rights Reserved.

Apple® is a registered trademark of Apple Computer, Inc.
ACE® is a registered trademark of Franklin Computer, Inc.

Try a NIBBLE!

Here's what some of our Readers say:

- "Certainly the best magazine on the Apple!"
- "Impressed with the quality and content."
- "Programs remarkably easy to enter."
- "I'll be a subscriber for life!"
- "Your service is fantastic . . . as a matter of fact, I'm amazed!"

Try a NIBBLE!

NIBBLE is focused completely on the Apple and Applesoft-compatible computers.

Buy NIBBLE through your local Apple Dealer or subscribe now with the Coupon or Order Card in this issue.

You'll want Back Issues Too!

Here are some examples of programs you can get:

The Investor—Stock Tracking, Reporting, and Graphing.

Recipe Box—Kitchen/Menu Management made Fun.

The Librarian—Auto Logging and Retrieval of your Disks.

Designer/Illustrator—Art/Design Creation and Composition with Graphics.

Machine Language Editor—Quick and Easy Aid for Typing and Changing M/L Programs.

And Much . . . Much More!

NIBBLE will become a permanent part of your Reference Library. Discover why 95% of NIBBLE Readers save every issue!

Join more than 120,000 Apple/Ace users who say:
"NIBBLE IS TERRIFIC!"

SUBSCRIBE NOW AND SAVE \$12.00 OFF THE COVER PRICE!

nibble

We accept Master Charge & Visa

Box 325, Lincoln, MA 01773 (617) 259-9710

I'll try nibble!

Enclosed is my \$26.95 (for 12 issues)
(Outside U.S., see special note on this page.)

check **money order** **bill me (U.S. only)**

Your subscription will begin with the next issue published after receipt of your check/money order.

Card # _____ Expires _____
PLEASE PRINT CLEARLY

Signature _____

Name _____

Address _____

City _____

State _____ Zip _____

PUT THE FULL POWER OF YOUR VIC-20 AT YOUR COMMAND!

Order your copy of MICRO's newest book...

MASTERING YOUR VIC-20 with eight BASIC projects

Now you can do more with your VIC-20. This new book and the eight projects and programs it contains can teach you how to master VIC BASIC programming. Each chapter concentrates on a particular aspect of VIC BASIC, and each program is accompanied by discovery-oriented, tutorial text, clear directions that will quickly have you writing programs, modifying them and adding features all on your own. And to help you master your VIC-20 even faster, all eight programs in the book are already keyed in on the accompanying cassette.

You'll Receive:

◆ **MICRO Calc...**a miniature spreadsheet program that makes complex, repetitive calculations a breeze.

◆ **MASTER...**a guessing game that teaches programming with random numbers and flags.

◆ **VIC Clock...**to teach you ON..GOSUB function and character graphics.

◆ **BREAK-UP...**a popular game that also teaches how animation is achieved with PEEKS and POKES to screen memory.

Use this coupon or the postage paid card in this issue to order.

MICRO Books P.O. Box 6502, Chelmsford, MA 01824

YES, please rush _____ copies of MASTERING YOUR VIC-20 (w/cassette), at only \$19.95 per copy (plus \$2.00 s/h, MA res. add 5% sales tax).

My payment of \$ _____ is enclosed. I'm paying by Check MO
 VISA MC

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

CREDIT CARD # _____ EXP. DATE _____

Allow 6-8 weeks for delivery.

◆ **Plus...** music programming, string manipulation, sorting demonstrations, and more.

**Each Program
Worth the Price
of the Book!**

**Order your copy of
MASTERING
YOUR VIC-20
Today!**

MICRO™ Interface Clinic

by Ralph Tenny

A computer can be interfaced to real time events, but if a computer is to be able to react with and control real time activities, it must know when the events are happening. There are two basic ways to accomplish this — polling and *interrupts*. An interrupt is a way to signal a running computer — gaining its attention — that it must delay further execution of the running program to service another event. Most modern microprocessors have provision for three kinds of interrupts. The first, called RESET, is used on startup and causes the microprocessor's internal registers to be set to a known condition instead of the random condition which happens when power is first applied. In addition, the internal RESET algorithm initiates certain operations, including reading an external memory location for (usually) the address of the programmer's idea of a proper initialization routine. This is called *indirect addressing*, which means that the first data read from memory is not an instruction but the *address* of an instruction.

Two other interrupts are common also. The IRQ (Interrupt ReQuest) is typically a *maskable* interrupt (meaning it can be turned off via a software flag), and the NMI (Non-Maskable Interrupt) are usually available on modern microprocessors. These interrupts cause some portion of the microprocessor's status to be saved so the interrupted program can be resumed in orderly fashion. Those of you with 6809-based machines also have three software interrupts (similar to the 6502's BRK instruction) and the FIRQ (Fast Interrupt ReQuest) which responds more rapidly than IRQ by saving fewer processor registers).

Programming for interrupts requires special precautions and programming methods. Not only do you have to have special *interrupt service* programs, you must carefully manage the interrupt enable bit and the associated hardware which causes the interrupt. It is universal practice that interrupt input pins are at logic one level during normal operation, and respond (issue an interrupt) when the pin is pulled to logic

zero. Usually, the NMI interrupt is edge-sensitive (a negative-going input is latched internally) so that the pin must go high and then come low again before another interrupt is accepted. IRQ inputs are usually level-sensitive; if the interrupt service routine is completed before the pin is released, another interrupt will be issued immediately. In one aspect, the microprocessor's response to either IRQ or NMI is identical — the current instruction is completed before the interrupt is honored. In most cases, the microprocessor also ignores further interrupts until the current interrupt service routine is finished. This is accomplished by using the RTI (ReTurn from Interrupt) instruction to terminate the service routine.

The program in the listing illustrates how to handle interrupts caused by the CD input of the serial port. This input drives the CA1 pin of the I/O PIA of the Color Computer, and the IRQ output from the PIA is connected to the 6809's FIRQ pin. The IRQ and the FIRQ interrupts each have their own disable flags. If either bit is set to logic one, the corresponding interrupt is inhibited or turned off. Unlike some processors (6502 for example) which directly set or clear status register bits, the 6809 uses special AND or OR instructions which set or clear selected status bit. One such example is shown in the listing one line above the label SPIN (\$301D) -ANDCC \$BF. If you remember how the logical AND works, any bit in the operand is set to zero if the corresponding mask bit is zero. In this case, the *bit mask* (pattern) is \$BF, which has all bits except Bit 6 set to logic one. Thus, Bit 6 in the operand (Condition Code register or Status Register) is set to logic zero; this *enables* (turns on) the FIRQ interrupt. Similarly, at the label QUIT (\$3055) the instruction ORCC \$40 is used to turn off the FIRQ interrupt. Refer to Figure 1, which shows the PIA Control Register and briefly identifies the functions of each Control Register bit. For now, we will skip a complete description of this register's functions; instead, note bits 6 and 7, which are IRQ

flags. CA1 is always an input and can be programmed as an interrupt; CA2 can be either an output or input/interrupt. Similar relationships are true for Control Register B, CB1 and CB2. If CA1 and CA2 are programmed as interrupts, Bit 7 responds when CA1 is pulled low, and Bit 6 responds to CA2. Last month's applications program polled the RS-232IN line (bit 0 of the port), but since our serial adapter also pulses the CD input, we could have polled bit 7 of the Control Register instead.

Let's examine the program flow in the listing. Beginning at the label START, the location BUFR (defined at the program's end) is cleared, then the time constant DVAL is stored in CoCo's baud rate buffer. The next command points the Y INDEX to the next location past BUFR; this can be omitted after program debugging; it simply provides a record of the input values to aid in troubleshooting. The next three instructions read the current value in the PIA Control Register, turn on Bit 0, and restore the modified value. This is the first of three steps required to completely enable the interrupt structure so this PIA can cause a processor interrupt.

The second portion of setting up an


**Apple Tree
Electronics**

PROWRITER PRINTER
\$395

HARDWARE

FRANKLIN ACE 1000
The Professional Personal Computer
INTRODUCTORY PACKAGE



- Franklin Ace 1000
- 1-Disk Drive
- Green Monitor

\$1595

QUICK BROWN FOX
\$5525

CALL FOR THIS MONTH'S SPECIAL
1-800-835-2246 EXT. 211
OR
702-459-4114

**5130 East Charleston Blvd.
Suite 4M
Las Vegas, Nevada 89122**

**Add \$3.00 for shipping, handling and insurance.
Nevada residents add 5.75% sales tax. Please include
phone number. Equipment subject to price change
and availability. Call or write for price list.**

TAYLORMADE SOFTWARE • TAYLORMADE

For the COMMODORE 64™ and VIC 20™

TOUCH TYPING TUTOR
 19 lessons—Watch your TV screen to learn proper finger placement.
 PRACTICE—learn your word/min. rate typing pseudo words.
 TEXT—English sentence fragments for timed tests of any duration.
 Includes 12-page manual.
 TTT64D Diskette \$24.95
 TTT64 Cassette \$19.95
 TTT5K VIC Cassette \$19.95

PINBALL MATH
 Improve math skills playing PINBALL MATH! Add, subtract, multiply, divide, each with 3 levels from basic facts to two-digit operands. Sprites, sound, pinball graphics, scoreboard. For students in grades 1-6.
 PM64D Diskette \$24.95
 PM64 Cassette \$19.95
 PM-VIC + 8K Cassette \$19.95

FUN FRACTIONS
 Watch VIC show you all the steps to do addition, subtraction, multiplication, division, and reductions of fractions. Your turn; can you answer before the parachute jumper crashes? For students in grades 4-9. Includes 16-page manual.
 FF-VIC + 8K Cassette \$19.95

Note: Product code gives computer and memory required.

U.S./Canada add \$1.50 shipping/handling
 COO charge \$1.65
 Foreign orders payable U.S. funds plus \$4.00 shipping

TAYLORMADE SOFTWARE

P.O. Box 5574
 Lincoln, NE 68505
 (402) 464-9051

Commodore 64 and VIC 20 are trademarks of Commodore Business Machines, Inc.

TAYLORMADE SOFTWARE • TAYLORMADE

interrupt is to load the *vector*, which is the address of a routine to service (respond to) a particular interrupt. The 6809 microprocessor has provisions for eight interrupts, seven of which have been implemented and one has been reserved for future expansion. Upon receipt of an interrupt, the 6809 reads one of the eight two-byte values it finds in the memory space \$FFF0 to \$FFFF. When a Synchronous Address Multiplier (SAM) is in the system, as in the Color Computer, SAM forces these interrupts to be moved to \$BFF0-\$BFFF. If you examine memory (use a debug monitor or PEEKs), you will find some two-byte values stored as part of the BASIC ROM. Some of those addresses point to the memory area beginning at \$0100. Remember, the interrupt structure expects these address vectors to be indirect addresses which point to the interrupt service routine. Since these routines can be anywhere, and of any length, a *jump table* is used. This is a series of absolute jumps, listed one after the other in memory. So, for any of the vectors beginning at \$0100, you will find 7E XX XX, where XX XX represents the starting address of the interrupt service routine. The FIRQ vector is used to auto-start CoCo from a ROMPACK, so BASIC initializes the FIRQ vector at \$010F. If we wish our FIRQ service routine to be used, then we must substitute our vector for the BASIC vector. The three program steps beginning at \$3017 do just that. BASIC has already written the code \$7E (JMP) in location \$010F, so our program reads the address of INTSRV and writes two bytes (\$302A) beginning at \$0110. That is Step 2 needed to initialize an interrupt. Step 3 follows: read the port to clear Bit 7 in case CD has been pulsed while we were talking, and then enable the FIRQ interrupt. This cancels any pending interrupt which came in before we were ready, and allows our routine to begin with a clean slate.

In this particular case, our program simply goes into a wait loop, checking the keyboard to see if we push a key. Anytime an interrupt comes in, the eight bits captured by the serial adapter's input pin come spinning in, just as they did when we polled the RS-232IN line last month. This has been a slightly simplistic explanation, but it is accurate for any CoCo which does not have Extended BASIC. Extended BASIC runs a software timer based on IRQ, and triggered by a 60 Hz interrupt signal on CB1 of the keyboard PIA, but since FIRQ is a *higher priority* [more important] interrupt, our signal will dominate. Since our

MEMORY FOR YOUR VIC-20
 — PLUS A LITTLE EXTRA —

32K Dynamic Ram — Same type as Commodore 64
 24K Used normally, for full expansion. Blocks 1, 2, & 3.
 "EXTRA" 8K maps into block 5, normally used for ROM cartridges (Games)

Access from BASIC for data storage, only through PEEK and POKE
 Accesses in assembler for data, or write your own GAMES, & boot into them normally

The 3k "Block 0" ram has been intentionally left free for the VIC Superexpander
 Each 8K block can be switched in or out for compatibility with games, or other peripherals
 Powered by your VIC-20 (175 ma typ)
 Plugs directly into VIC expansion slot or motherboard
 Complete, assembled, & tested
 90 day "No questions asked" money back return
 5 year manufacturer's warranty

\$109.95

TEMPUS
 Dept M101, 832 Brown Thrush
 Wichita, KS 67212

We carry the entire XETEC line for VIC-20 and C64. Write for literature. Master Card and VISA accepted! Send card number & expiration date. Handline charges add \$3.00. Personal checks take 3 weeks to clear, before we ship. VIC-20 & Commodore 64 are Commodore trademarks.

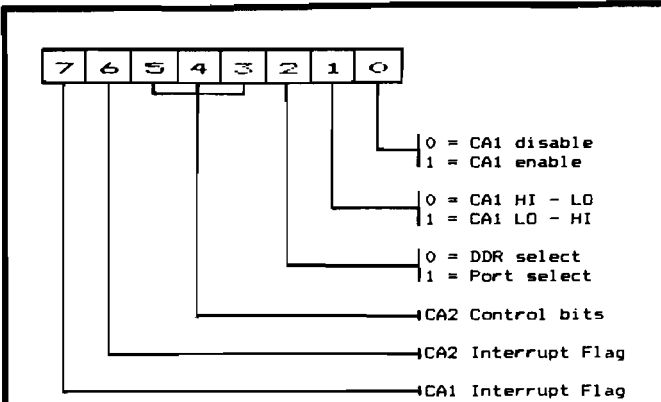


Figure 1. Control Register of the 6821 PIA. Bits 0 and 1 control the CA1 Interrupt input pin (see text).

routine will run longer than the 16.6 millisecond period of the 60 Hz interrupt *each time it happens*, the BASIC clock will miss a "tick" every so often. If you depend on this clock, you may wish to poll the serial adapter instead of run it under interrupt control.

Once the interrupt happens, the code at label INTSRV begins to execute. Much of this code is identical to the previous programs which we have used to exercise the hardware, so let's concentrate on the differences. Just as we had to manage the interrupt entry software carefully, certain things must be accomplished by the service routine. The processor automatically disables both interrupt bits whenever either IRQ or FIRQ are asserted, and the RTI instruction restores the original interrupt enable status upon exit from the service routine. Obviously, the service routine must perform the intended task which created the need for an interrupt, but it must also *clear* the interrupt (prevent the same interrupt from being asserted again).

If external hardware can be cleared or reset to remove the stimulus, this must be done. If this cannot be done, the service routine must continually check for the hardware status, waiting for it to clear itself. Our hardware automatically removes the stimulus, so we have one other thing to clear. Bit 7 of the Control Register was set by the input pulse on the CD input, and will remain set until the port is read (label EXIT). Note that although we read that port, this value is not used. The service routine is finally terminated with RTI, and (in this case) operation in the loop SPIN is resumed. Note that almost any other operation could take the place of this loop, but this is a simple example, so feel free to improvise.

We didn't get to the real world interfaces I promised last time, so we'll try again next time. This has been a learning series, preparing for "greater things", so any of you who have just joined us may have to review earlier columns for background. Let's move on and do more complex and comprehensive interfacing!

MICRO™

Please forward questions and suggestions for discussion topics to Mr. Tenny at P.O. Box 545, Richardson, TX 75080.

Listing

```

* THIS PROGRAM WILL INPUT AN 8-BIT VALUE ON THE
* COLOR COMPUTER SERIAL PORT IN RESPONSE TO
* AN INTERRUPT ON THE CD INPUT.
* EQUATES
010F FIRQ EQU $10F FIRQ INTERRUPT VECTOR
00AB DVAL EQU $AB DELAY VALUE
0095 BAUD EQU $95 BUFFER FOR DELAY CONSTANT
A000 POLCAT EQU $A000 KEYBOARD SCAN
FF20 PORTOUT EQU $FF20 RS232 OUT PORT
FF21 CTLIN EQU $FF21 CONTROL PORT FOR SERIAL IN
FF22 PORTIN EQU $FF22 SERIAL IN PORT
* MAIN PROGRAM
3000 ORG $3000
3000 7F 305D START CLR BUFR CLEAN SLATE
3003 8E 00AB LDX #DVAL SET UP TIMER
3006 9F 95 STX BAUD
3008 108E 305E LDY #BUFR+1 POINT TO RECORD BUFFER
300C B6 FF21 LDA CTLIN ENABLE CD INTERRUPT
300F 8A 01 ORA #1
3011 B7 FF21 STA CTLIN
3014 BE 302A LDX #INTSRV RESET FIRQ VECTOR
3017 BF 0110 STX FIRQ+1
301A B6 FF20 LDA PORTOUT RESET IRQ FLAG
301D 1C BF ANDCC #BF ENABLE FIRQ INTERRUPT
301F AD 9F A000 SPIN JSR [POLCAT] TEST KEYBOARD
3023 26 30 BNE QUIT -
3025 B6 FF20 LDA PORTOUT RESET IRQ FLAG
3028 20 F5 BRA SPIN LOOP WAITING FOR INTERRUPT
302A 9E 95 INTSRV LDX BAUD GET DELAY VALUE
302C 1F 10 TFR X,D DIVIDE BY TWO
302E 47 ASRA
302F 56 RORB
3030 1F 01 TFR D,X
3032 8D 24 BSR DELAY AND COUNT IT DOWN
3034 B6 FF22 LDA PORTIN START BIT?
3037 84 01 ANDA #1
3039 26 16 BNE EXIT IF NOT, SKIP IT
303B 9E 95 LDX BAUD OTHERWISE, GET FULL DELAY TO
303D 8D 19 BSR DELAY READ MIDDLE OF FIRST BIT
303F C6 00 SETUP LDB #0 BIT COUNT
3041 B6 FF22 INPUT LDA PORTIN READ PORT
3044 A7 A0 STA ,Y+
3046 44 LSRA
3047 76 305D ROR BUFR BIT INTO STORAGE
304A 9E 95 LDX BAUD SET UP TIMER
304C 8D 0A BSR DELAY
304E 5A DECB COUNT DOWN BITS
304F 26 F0 BNE INPUT AND DO EIGHT PASSES
3051 B6 FF20 EXIT LDA PORTOUT RESET IRQ FLAG
3054 38 RTI RETURN TO WAIT LOOP
3055 1A 40 QUIT ORCC #40 DISABLE INTERRUPT
3057 39 RTS AND THEN QUIT
3058 30 1F DELAY LEAX -1,X
305A 26 FC BNE DELAY
305C 39 RTS
305D BUFR RMB 1
END

```

MICRO™



LISA v2.6

You don't need an I.Q. of 200 to learn assembly language on your Apple II or Apple//e. All you need is the best 6502 assembler around: **Lazer's Interactive Symbolic Assembler (LISA v2.6)**. LISA is the easy-to-learn and easy-to-use system that will have even the absolute beginner up and running in a matter of minutes. In addition to LISA's clearly written 240-page manual more tutorial material is available for LISA than any other assembler (including books by D. Fudge, R. Hyde, W. Mauer, and R. Mottola). LISA is the beginner's best choice.

Even if your I.Q. is 200, you'll appreciate LISA's speed, power, and ease of use. At 20,000 lines/minute it's 20 to 30 times faster than ORCA/M or Apple's own Toolkit assembler. That's why people like Bill Budge, Ken Williams, Brian Fitzgerald, Don Fudge, and Steve Wozniak use it every day. LISA is very usable. That's why it's the most often used assembler ever created for the Apple II.

LISA v2.6 is available for \$79.95 at computer stores everywhere. If your local computer store doesn't have a copy you can order directly from:

Lazerware, 925 Lorna St., Corona, California 91720. (714) 735-1041

LAZERWARE

COMMODORE 64 PROGRAMS

BUSICALC 3

BUSINESS
CALCULATION
PROGRAM

\$129

The "TRUE 3-D"
Electronic Spreadsheet
for the Commodore 64

BUSICALC 1

BUSINESS
CALCULATION
PROGRAM

\$69

A "BEST BUY"
Electronic Spread Sheet
for all Commodore's

BUSICALC 2

BUSINESS
CALCULATION
PROGRAM

\$99

The MOST CAPABLE
Electronic Spread Sheet
for the Commodore 64

WE'RE HERE!



Skyles Electric Works
231E South Whisman Road
Mountain View, CA 94041
(415) 965-1735

AVAILABLE NOW! Call 800 227-9998**
For the name of your nearest dealer,
detailed information or a catalog of products.
**California, Canada and Alaska, please call (415) 965-1735.

In Europe: SUPERSOFT, Winchester House, Canning Road, Harrow Wealdstone, England HA3 7SJ, Tel. 01 861 1166

Next Month in Micro

Last month in "Next Month in MICRO" we promised you articles detailing how to define your own character sets on the new Epson FX-80 printer for the Commodore 64, VIC-20,

and Atari systems. Due to a lack of time and space, this material was not presented this month. It will, however, be presented in the next issue, and will include programs in BASIC to define the

special characters on your display, to send the appropriate information to the FX-80 to define the characters, and to output BASIC listings. Some of the routines developed for the article were used to generate listings in this issue.

The main feature topic for January is Communications. One of the areas of microcomputer usage which is really expanding is that of telecommunication. There are literally hundreds of "bulletin boards", "tele-services", and so forth for you to talk to. MICRO is developing on its own hardware/software system, The MICRO Program Dump, that will allow subscribers to "download" programs that are published in MICRO directly into their microcomputers. The feature article Transfer Programs Over the Telephone will help your micro tie into the MICRO Program Dump. A second feature will be on Local Networks, a form of communication that allows you to interconnect various system components such as microcomputers, printers, storage devices and so forth. A third article will be about Using the VIC/C64 Parallel Port, providing cabling information and a program for transferring information via this useful, but not well supported, device.



NO POWER SPIKES WITH SUPER FAN II.

Super Fan II's Zener Ray™ Transient Voltage Suppressor and Power Filter squelches spikes up to 6000 amps — even those caused by lightning — while responding up to 100 times faster than Apple II's


built-in suppressor.

In addition, Super Fan II cools your Apple, removing heat buildup at a remarkable 17 cubic feet of air per minute. Yet it's the quietest fan of its kind on the market.

Super Fan II also positions a lighted on/off computer switch and two accessory plugs at your fingertips. It's warranted for two years and simply clips to your Apple II, IIe or monitor stand.

See your R.H. Electronics dealer today about Super Fan II*, or contact us at 566 Irelan Street, Buellton, CA 93427, (805) 688-2047.

RHELECTRONICS, INC.

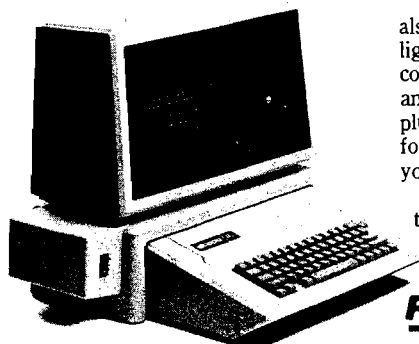

Super Fan II, in black or tan: \$109.
Without Zener Ray, \$74.95.
Additional air flow seals, \$5.
Available in 240V/50 Hz.

Dealer/OEM inquiries invited.
*U.S. Patent #D268283
#4383286

France, call B.I.P. 1-255-4463
Australia, call Imagineering (02)212-1411

MICRO™



This Christmas, Atari and Commodore* owners will go out of their minds.

It'll take about 30 seconds.

Because once you boot a Datamost game on your Atari home computer, or your Commodore 64, you'll come face to screen with the most mind-blasting games ever.

And what better time to go out of your mind than Christmas?

Our Music Will Have You Hearing Things.
Going out of your mind never sounded so good.

Because now our games have music. You heard right. Music. Original Music. Throughout. And scored just for our newest releases. You'll go nuts over it.

Our Graphics Will Have You Seeing Things.

You and everybody else.

Because our games are so great-how great are they? -they're so great you'll want to play them again and again and again. And then your friends will go bonkers over them.

And they'll want to play. And then your family will want to play. And then total strangers off the street will want to play and...

Mind-blowing arcade-quality action like this makes it one mad world, pal.

We'll Torment You Right From The Start.

No time to settle down and get comfy.

The tension begins building the moment you boot the game.


Terrific screen titles tease you with the game's objective, scenario, characters.

And while you wait, hand twitching over the Joystick, you'll find out what planet you're on.

What the fuss is all about.

Why you're involved. And perhaps of singular importance to you personally, how to keep from being obliterated. So get ready to get the most out of your mind.

By getting the most out of ours.



THE TAIL OF BETA LYRAE.™ Changes as you play. Unpredictable. Impossible to master. (No one has!)



DATAMOST™


The most out of our minds.™

Datamost, Inc., 8943 Fullbright Ave., Chatsworth, CA 91311, (213) 709-1202

Atari is a trademark of Atari Computer. *Commodore 64 is a trademark of Commodore Business Machines, Inc. TM Registered Trademark of Datamost.




COSMIC TUNNELS.™
Four games in one.
Four times the challenge! Incredible graphics.



MONSTER SMASH.™
Deathly strategy. Mash the monsters! Let the visitors live.



NIGHT RAIDERS.™
Strafe a city under siege with 3D angled selective firing!



ROUNDAABOUT.™
Sharpens your shoot 'em up skills. 24 different game screens. Habit-forming!



COHEN'S TOWERS.™
You're the mailboy in a big city skyscraper. Work your way to the top.



MR. ROBOT.™ Screens scream with color, action and sound! Design your own screens, too.

How To Expand Your Apple®

More speed, more memory workspace from the people who lifted the 64K limit.

In 1981, we introduced our famous Saturn RAM card to boost the Apple's memory by 32K. Now, there are 64K and 128K versions for added power.

Increased RAM lets you run bigger programs, and our VisiCalc® expansion software provides a dramatic expansion of workspace memory. Also, the extra memory can work as a pseudo disk for instant access. (No more 20-second searches!) The Saturn RAM board is a super aid for advanced word processing, data base management, spread sheet, and accounting applications. And perfect with PASCAL, CP/M®, and BASIC.



Use our easily installed cards in combination—and get a whopping 220K of VisiCalc workspace on the Apple IIe. Or sensational enhancements on Apple II, II+, Franklin, Basis and most Apple compatibles. We even have software that increases your Apple's memory in BASIC programming up to 4 megabytes!

This kind of performance requires sophisticated bank switching and supporting software that we originated, proved, and improved. Buy from the leader!

Let us help you expand your Apple's productivity. For information on our RAM boards and other Titan microcomputer products, see your computer dealer or contact: Titan Technologies, Inc., P.O. Box 8050, Ann Arbor, MI 48107; Telephone (313) 973-8422.

Sales and Marketing by The MARKETING RESOURCE GROUP, Costa Mesa, CA.



Apple is a registered trademark of Apple Computer, Inc.
VisiCalc is a registered trademark of VisiCorp, Inc.
CP/M is a registered trademark of Digital Research, Inc.

Advertiser's Index

AB Computers.....	81
Alternative Energy Products.....	78
Apple Tree Electronics.....	97
Ark Computers.....	100
ArtSci.....	54
Atari Home Computers.....	1
Atari Program Exchange.....	60
Blue Sky Software.....	Cov II, Cov III
Check-Mate.....	28
Computer Mail Order.....	51,52
Computer Software Associates.....	91
CompuTech.....	48
Datamost, Inc.....	4, 103
Eastern House Software.....	94
Excert.....	85
Hollywood Hardware.....	58
Incomm.....	62
Interesting Software.....	38
John Bell Engineering.....	65
Leading Edge.....	Cov IV
Micro Magazine.....	35,80,96
Micro Motion.....	71
Micro Sparc.....	95
Micro Spec.....	7
Micro Ware Distributors.....	34
Midwest Micro.....	32
Momentum.....	2
Penguin Software.....	3
Percom Data.....	59
Performance Micro Products.....	34
Perry Peripherals.....	77
Prometheus.....	51
Protecto Enterprises.....	14,15,22
RH Electronics, Inc.....	102
Richvale Telecommunications.....	46
Safeware.....	74
Scientific Software.....	40
SGC.....	72
SJB Distributors.....	37
Skyles Electric Works.....	101
Star Micronics.....	45
TaylorMade Software.....	98
Tempus.....	98
Unique Data Systems.....	93
Victory Software.....	8
Winders & Geist Inc.....	88
Zanim Systems.....	75

National Advertising Representatives

Home Office:

Sheila McDonough,
Advertising Representative
10 Northern Boulevard
P.O. Box 6502
Amherst, NH 03031

Mid-West Territory:

Thomas Knorr & Associates
Thomas H. Knorr, Jr.
333 N. Michigan Avenue, Suite 400
Chicago, Illinois 60601
(312) 726-2633

West Coast:

The R.W. Walker Co., Inc.
Gordon Camle
2716 Ocean Park Boulevard,
Suite 1010,
Santa Monica, California 90405
(213) 450-9001

serving: Washington, Oregon, Idaho, Montana,
Wyoming, Colorado, New Mexico, Arizona, Utah,
Nevada, California, Alaska, and Hawaii (also
British Columbia and Alberta, Canada)



SCRIPT 64

SCRIPT 64™ Makes Your World Letter Perfect

SCRIPT 64 moves you into the exclusive neighborhood of sophisticated word processing for an amazing \$99.95.

In addition to all the standard text editing features most higher priced systems offer, SCRIPT 64 also gives you an 80 column format and a built-in spelling dictionary...all in one program for the Commodore 64™.

To make your world letter perfect, ask your dealer for a demonstration of SCRIPT 64 today.

Developed by:



**Richvale
Telecommunications,
LTD.**

Distributed by:

Warehouse 1, Inc.
Eastern U.S. 800-253-5330
Western 800-255-0056

Computer Marketing
Services, Inc.
800-222-0585

DES-Data
Equipment Supply
213-923-9361

A Product of:



Blue Sky Software
Ashland Office Center
Evesham & Alpha Avenues
Voorhees, NJ 08043
609-795-4025

Also available for the IBM-PC.
Script 64, Commodore 64 and IBM-PC are registered trademarks of Richvale Communications LTD., Commodore Electronics Limited, and International Business Machines, Corp. respectively.

THE SECRETS OF PERFECT MEMORY: ONE AND ONE HALF EARTH DOLLARS

AT LAST, THE WHOLE TRUTH ABOUT FLOPPIES

Amazing book reveals
all.

How to keep from
brainwashing your disk
so it never loses its
memory.

How fingerprints can
actually damage disks.
Unretouched Kirtan
photographs of UFOs
& unidentified Floppy
Objects. The incredible
importance of making
copies, the Department
of Redundancy Depart-
ment—and what goes on
when it goes on! Power-
ful secret methods that
scientists claim can ac-
tually prevent computer
amnesia. All this, and
much more.

In short, it's an 80-
page plain-English,
graphically stunning,
pocket-sized definitive
guide to the care and
feeding of flexible disks.

For The Book, ask your
nearest computer store
that sells "Elephant"
disks, and bring along
one and one-half earth
dollars.

For the name of the
store, ask us.

**ELEPHANT MEMORY
SYSTEMS™** Marketed
exclusively by Leading
Edge Products, Inc.,
Information Systems
and Supplies Division,
55 Providence Highway,
Norwood, MA 02062. Call
toll free: 1-800-343-8413.
In Massachusetts, call
collect: (617) 769-8150.
Telex: 951-624.

